


PART NUMBER	LENGTH		ITEM ① UMC RIGHT ANGLE PLUG CONNECTOR, MEDIUM PROFILE	ITEM ② CABLE
	INCH	mm		
415-0088-050	1.97±.16	50±4	BODY - COPPER ALLOY - GOLD PLATED	SHIELD - TIN PLATED ANNEALED COPPER WIRE DIELECTRIC - FEP CENTER CONDUCTOR - SILVER PLATED ANNEALED COPPER WIRE, AWG#30 (7/.004) JACKET - FEP - BLACK
415-0088-083	3.27±.16	83±4	CONTACT - COPPER ALLOY - GOLD PLATED	
415-0088-100	3.94±.16	100±4	INSULATOR - PBT - BLACK OR NATURAL WHITE, UL94V-0	
415-0088-150	5.91±.16	150±4		
415-0088-200	7.87±.16	200±4		
415-0088-250	9.84±.31	250±8		
415-0088-300	11.81±.31	300±8		
415-0088-500	19.69±.31	500±8		
415-0088-1220	48.03±.71	1220±18		

DRAWING NO. B - 415-0088-001/XXXX	
0	REVISIONS
JACKET - FEP - BLACK WAS WHITE ***** * REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLARIFI- * * CATION OR PART NUMBER ADDITION ONLY. * *****	
1b	3-26-07 P A T S B D R J B M J U J C N 4-23-07 ECN 50953
ADDED P/N: 415-0088-083, BODY- COPPER ALLOY WAS PHOSPHOR BRONZE, CONTACT- COPPER ALLOY WAS BRASS, INSULATOR- PBT- NATURAL WAS LCP- WHITE ***** * REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLARIFI- * * CATION OR PART NUMBER ADDITION ONLY. * *****	
1c	1-21-08 P A T R J B M J U R J B J C N 1-25-08 ECN 51347
ADD MEDIUM PROFILE TO ITEM 1 BLOCK CHANGE INSULATOR COLOR TO NATURAL WHIT CHANGE SHIELD MATERIAL TO TIN PLATED CHANGE CONNECTOR HEIGHT TO .083	
1d	2-7-11 M S S D J R J B M S 2-7-11 ECO 52915
ADDED: BLACK. DELETED VENDOR REFERENCE +/- .006 WAS +/- .004	
2	10-3-12 M S R J B M J U 10-17-12 ECO 54381
ADDED P/N 415-0088-1220	
3	11-26-12 M S R J B S J M J U 10-27-12 ECO 54479

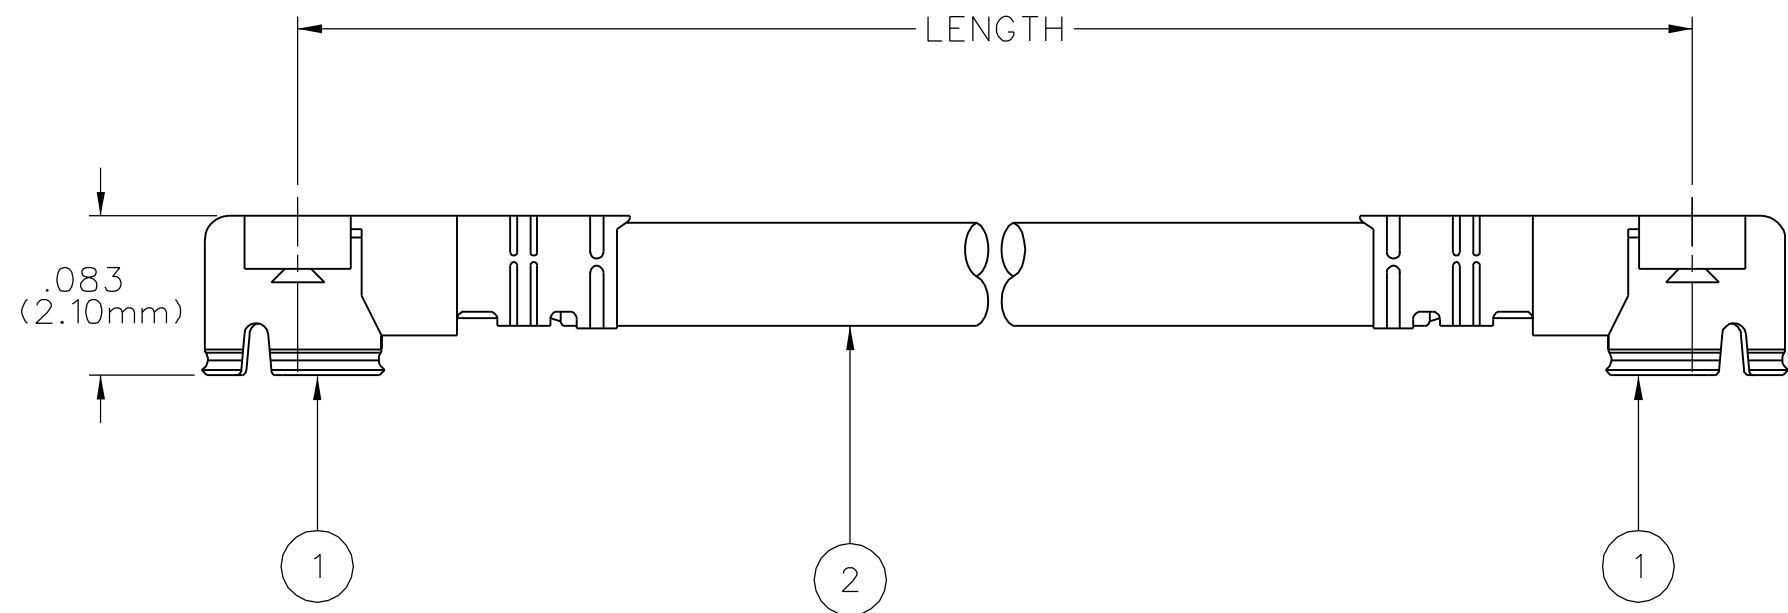

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-6 GHz
 VSWR: 1.30 MAX AT 0-3 GHz
 1.50 MAX AT 3-6 GHz

WITHSTANDING VOLTAGE: 200 V AC
 INSULATION RESISTANCE: 500 MEGOHM MIN
 CONTACT RESISTANCE:
 CENTER CONTACT - 20 MILLI-OHMS MAX
 OUTER CONDUCTOR - 20 MILLI-OHMS MAX

MECHANICAL:

COMPATIBILITY: MATES WITH U.FL SERIES
 HOLDING FORCE (MIN): 0.15 N (FEMALE CONTACT)
 DURABILITY: 30 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE: -40° C TO +90° C


CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
 PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY PAT	DATE 5-23-06
DECIMALS .XX _____	CHECKED BY RJB	DATE 12-13-06
mm ±0.15	APPROVED BY PDW	DATE 12-20-06
.XXX ±.006 _____	RELEASE DATE 12-20-06	
MATL _____	U/M	INCH
FINISH _____	SCALE	10:1

 Cinch CONNECTIVITY SOLUTIONS <small>a bel group</small>	Cinch Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
	TITLE UMC MATING CABLE PLUG .098 (2.5mm) MATING HEIGHT .054 (1.37mm) CABLE O.D.	
SHEET 2 OF 2	DRAWING NO. B - 415-0088-001/XXXX	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)