

# ABC300 Series

## AC-DC Open Frame Power Supplies

The ABC300 Series of open-frame power supplies, with its wide universal 90-264 VAC input range and high power density, is available at 300 W of output power and a variety of single output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for telecom, datacom, industrial equipment and other applications.



### Key Features & Benefits

- 5 x 3 x 1.5 inch form factor
- 200 W convection cooled
- No minimum load required
- 5 V Standby output
- 12 V Fan output
- Inhibit & Power Good signals
- IEC Protection Class Options:
  - Class I: Earth pin J4 (no suffix)
  - Class II: No Earth pin (-2 suffix)
- IEC / EN / UL 62368-1 Compliant
- RoHS Compliant
- CE marked

### Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

[belfuse.com/power-solutions](http://belfuse.com/power-solutions)

## 1. MODEL SELECTION

MODEL	CONNECTOR	OUTPUT VOLTAGE	MAX LOAD		MINIMUM LOAD	RIPPLE & NOISE <sup>1</sup>	POWER
			CONVECTION	300 LFM			
ABC300-1T05G	Screw Terminal	5 VDC	28.0 A	40.0 A	0.0 A	2%	200 W
ABC300-1T12G	Screw Terminal	12 VDC	16.67 A	25.0 A	0.0 A	2%	300 W
ABC300-1T15G	Screw Terminal	15 VDC	13.33 A	20.0 A	0.0 A	2%	300 W
ABC300-1T24G	Screw Terminal	24 VDC	8.33 A	13.54 A	0.0 A	2%	325 W
ABC300-1T30G	Screw Terminal	30 VDC	6.67 A	10.83 A	0.0 A	2%	325 W
ABC300-1T48G	Screw Terminal	48 VDC	4.17 A	6.77 A	0.0 A	2%	325 W
Cover-300-XBC <sup>2</sup>	Metal cover kit accessory						

- <sup>1</sup> Ripple is peak to peak with 20 MHz bandwidth and 10  $\mu$ F (Electrolytic capacitor) in parallel with a 0.1  $\mu$ F capacitor at rated line voltage and load ranges.
- <sup>2</sup> When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

## 2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal	90 – 264 VAC / 120 – 390 VDC
Input Frequency		47 to 63 Hz
Input Current	120 VAC 230 VAC	3.2 A max 1.65 A max
No Load Power		0.8 W
Inrush Current	120 VAC 230 VAC	35 A max 65 A max
Leakage Current	120 VAC 230 VAC	< 150 $\mu$ A < 300 $\mu$ A
Switching Frequency	PFC converter (fixed) Resonant converter (variable)	80 kHz typical 35 to 250 kHz, 90 kHz typical

### 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Voltage <sup>3</sup>		12 to 48 V
Stand-by Output <sup>4</sup>		5 VDC
Output Power <sup>5, 6</sup>	Derate linearly to 80% from 90 VAC to 80 VAC input.	200 to 325 W
Efficiency	120 VAC 230 VAC	88% typical 92% typical
Hold Up Time	120 / 230 VAC	10 ms
Power Factor	120 VAC 230 VAC	0.98 0.95
Line Regulation		± 0.5 %
Load Regulation		± 2 %
Transient Response	50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/μs,	< 10 %, recovery time < 5 ms
Rise Time		< 100 ms
Set Point Tolerance		± 1 %
Voltage Output Adjustment		± 3 %
Over Voltage Protection	Automatic recovery	110 to 150 %
Over Current Protection		110 to 150 %
Short Circuit Protection	Short term, automatic recovery	
Over Temperature Protection	Automatic Recovery	110° C primary heat sink
Cooling <sup>7</sup>	Convection	5 V model 140 W max 12, 15, 24, 30 & 48 V models 200 W max
	With 300 LFM	5 V model 200 W max
		12 & 15 V models 300 W max
		24, 30 & 48 V models 325 W max

- <sup>3</sup> Peak current rating on main output is 120% of max., lasting < 30 s with a maximum 10% duty cycle.
- <sup>4</sup> Standby output voltage tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.
- <sup>5</sup> Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.
- <sup>6</sup> Derate output power linearly to 80% from 90 VAC to 80 VAC input.
- <sup>7</sup> Refer de-rating curves to determine output power over the entire operating temperature range

### 4. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions	EN 55032-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55032 A; With external core (King core K5B RC 25x12x15-M in input cable)	Pass Level B
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 3, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 3, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion A & B



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

## 5. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output:	4000 VAC / VDC
Safety Standards	IEC 62368-1:2014, EN 62368-1:2014; A11, UL 62368-1 and CAN/CSA C22.2 No. 62368-1-14	
Agency Approvals	Nemko, UL	
CE mark	Complies with LVD Directive	

## 6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	Refer to de-rating curves -20 to 0°C start-up is guaranteed	-20 to 70°C
Storage Temperature		-40 to 85° C
Relative Humidity	Non-Condensing	95% Rh
Altitude	Operating: Non-Operating:	10,000 ft. 40,000 ft.
Reliability	MTBF according to Telcordia –SR332-issue 3	1.77 million hours

## 7. SIGNALS

PARAMETER	DESCRIPTION / CONDITION
Power Good <sup>8</sup>	TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s
Remote On/ Off	To turn on PSU short remote pin to ground
Remote Sense	Compensates for 200 mV drop

<sup>8</sup> Power good signal cannot be used as a current source. Internal pull up resistor from PG signal to 5V is 10K. It is recommended to use external transistor if intended to source current.

## 8. CONNECTOR & PIN DESCRIPTION

CONNECTOR	PIN	DESCRIPTION / CONDITION	MANUFACTURER / PN
AC Input Connector	J1	Pin 1 AC LINE Pin 2 AC NEUTRAL	Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106
DC Output Connector	J2	Pin 1 RTN Pin 2 V1	6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP : 8-31886-1, wherein one 16 AWG (max) wire can be crimped. Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only. Use multiple tongue terminals with wire for more current.
Signal Connector	J3 <sup>9</sup>	Pin 1 REMOTE ON/OFF Pin 2 RTN Pin 3 VFAN (+12 V/0.5 A) Pin 4 -VE REMOTE SENSE Pin 5 VSTBY (+5 V/2 A, +/-5%) Pin 6 +VE REMOTE SENSE Pin 7 RTN Pin 8 POWER GOOD	Molex: 22-23-2081 Mating: 22-01-2087; Pins: 08-50-0113
Earth (Spade Connector)	J4	(Class I product only)	Molex: 19705-4301 Mating: 190030001

<sup>9</sup> PSU is supplied with J3 housing, pin-1 and pin-2 shorted to enable main output without remote on/off feature.

## 9. DERATING CURVES

The de-rating curves are valid for input voltages of 115 to 264 VAC. Below 115 VAC to 90 VAC the convection rating is 180 W max.

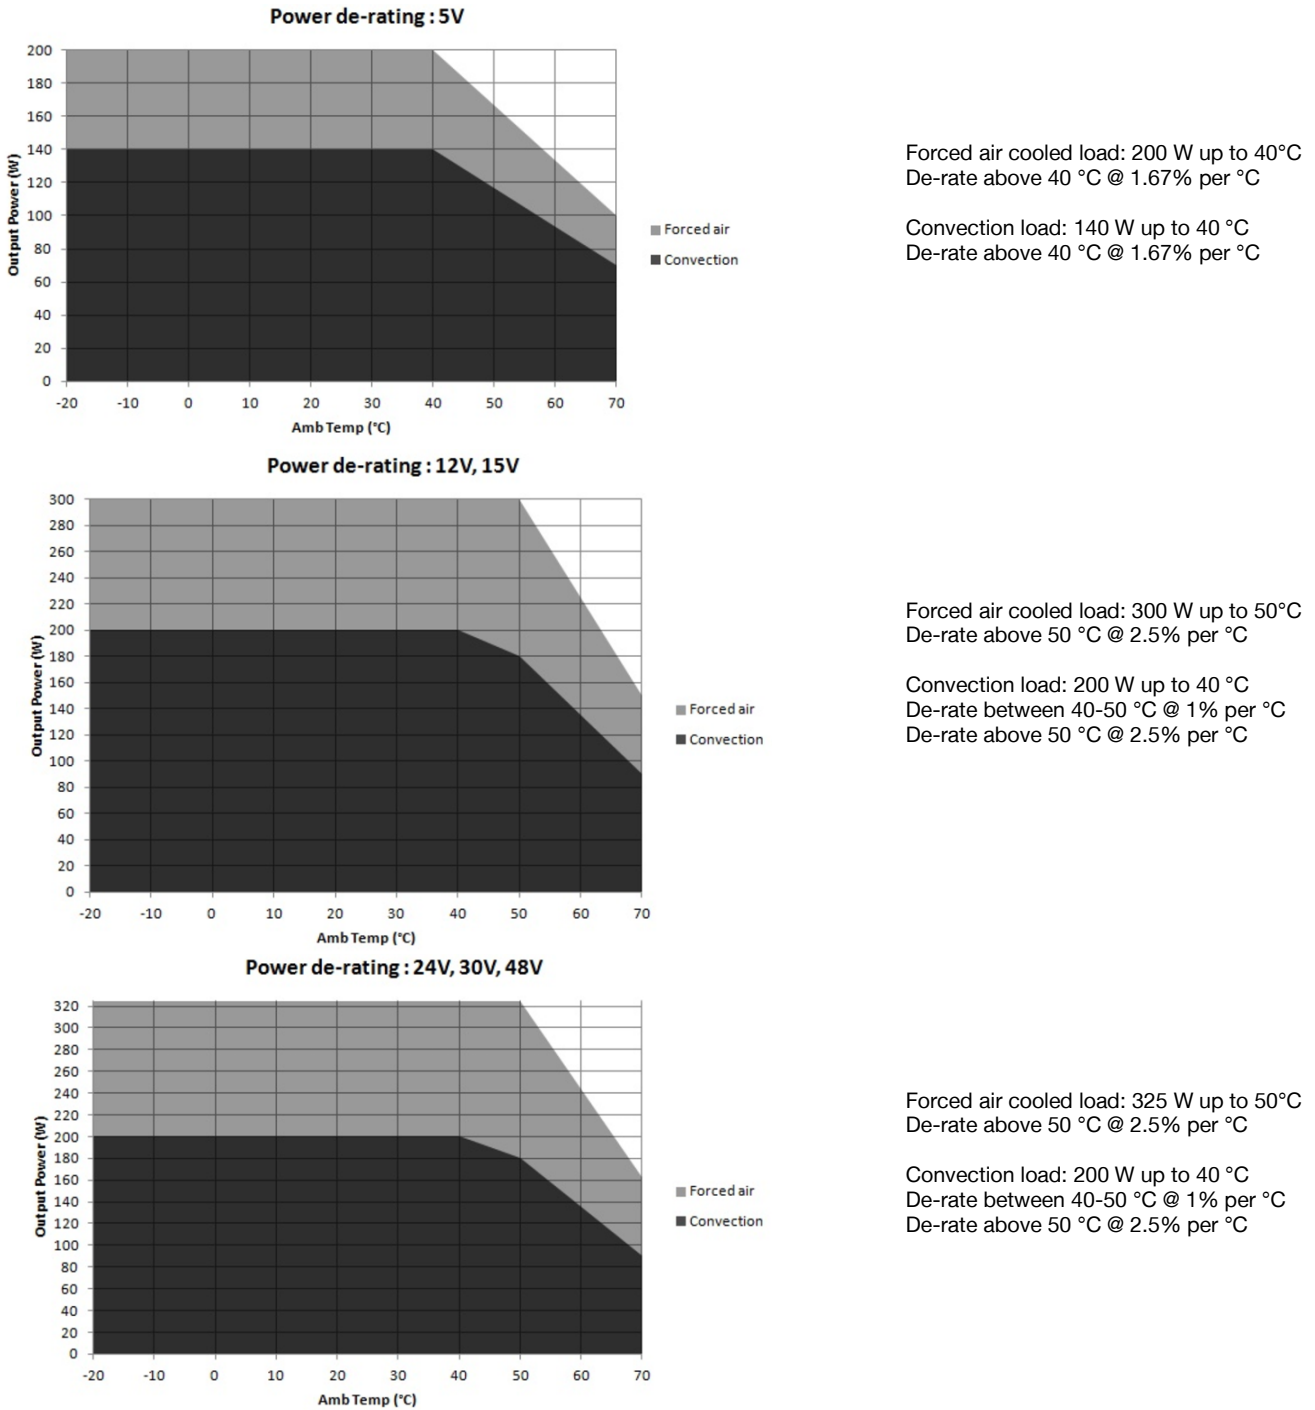


Figure 1. Derating Curves



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	450 g (0.99 lbs)
Dimensions	127.0 x 76.2 x 38.1 mm (5.0 x 3.0 x 1.5 inch)

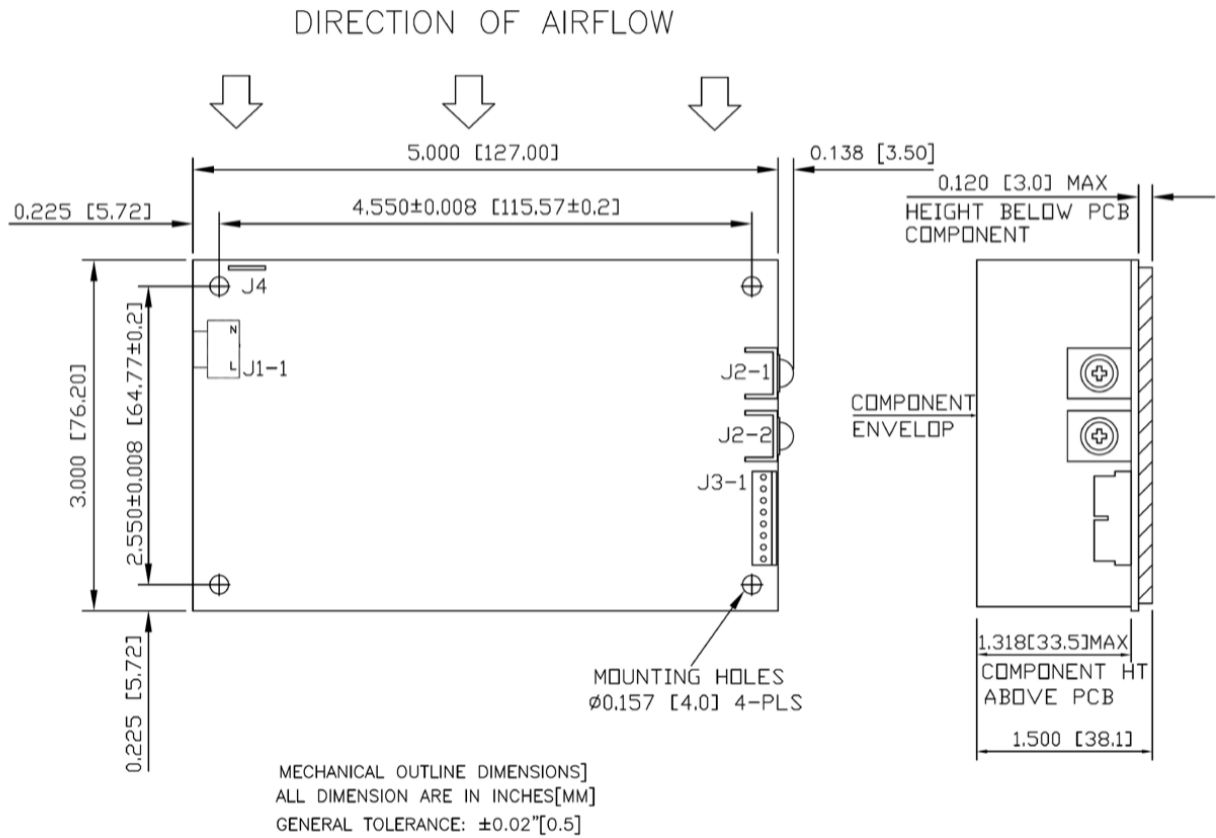


Figure 2. Mechanical Drawing

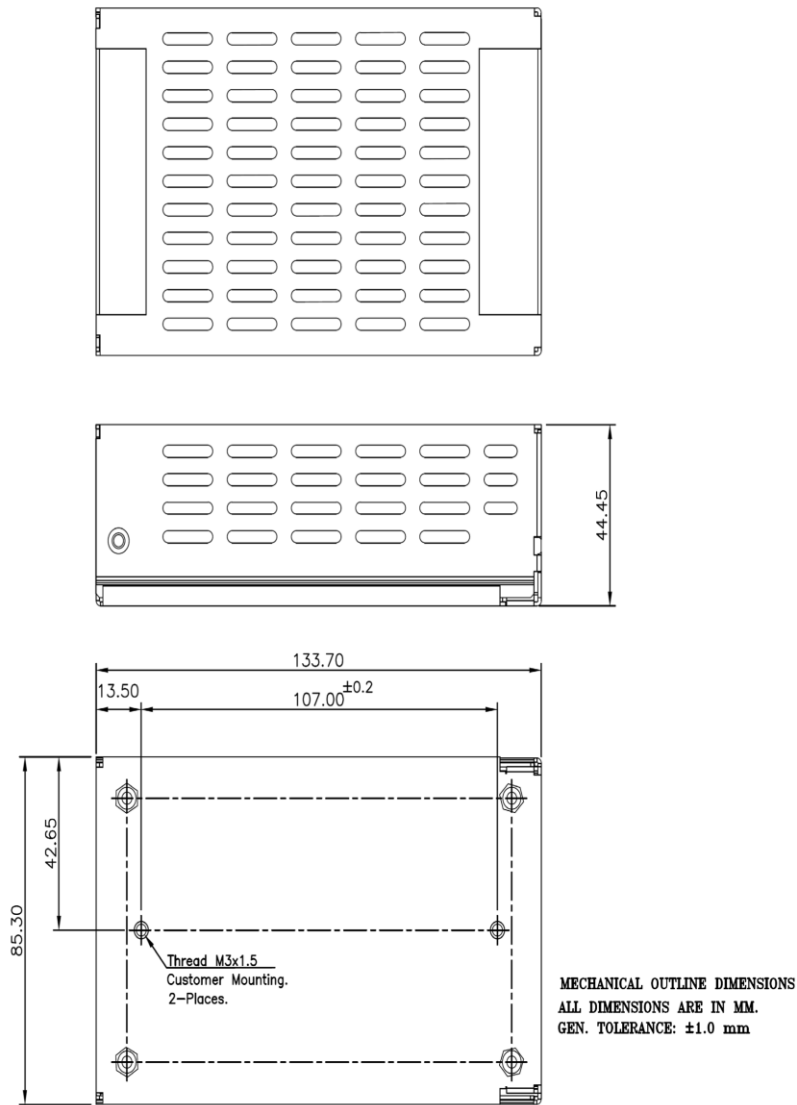


Figure 3. Mechanical Drawing with Cover Kit

**NOTES:** In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)  
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#)  
[WRB01X-U](#) [LPX140-C](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)  
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)  
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#)  
[VI-RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#)