



ABH50-1012

Isolated AC-DC Power Supply

The ABH50-1012 AC-DC open frame power supply features a wide universal AC input range of 85 V – 264 V for 12 V outputs, offering 50 W of output power in a compact footprint.

This high efficiency quasi-resonant flyback converter is based on Infineon ICE680 and meets DOE requirements for stand by power and Class B EMI with Margin.

These power supplies are ideal for medical, telecom, datacom, industrial equipment and other applications.



Key Features & Benefits

- 12 V outputs
- Output Power 50 W
- High Efficiency
- Dimensions 2.5 x 5.0 x 1.35 in
- Synchronous rectified output using IR1161
- Saves over 3 W @ 40 W with break-even cost compared to diode and heatsink

Applications

- Battery charging
- Driving LED strings
- Starting small electric motors



bel POWER SOLUTIONS & PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL NUMBER	OUTPUT VOLTAGE	INPUT VOLTAGE	MAX. OUTPUT CURRENT	MAX. OUTPUT POWER	TYPICAL EFFICIENCY
ABH50-1012	12 VDC	85~264 VAC	4.2 A	50.4 W	90%

2. INPUT SPECIFICATIONS

All specifications are typical at 25°C unless otherwise stated.

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Operating Input Voltage		85	100-240	264	V
Input Frequency Range		47	-	63	Hz
Input Current	Vin = 110 V, Full Load	-	-	1	A
	Vin = 230 V, Full Load	-	-	0.6	A
Inrush Current	Cold start at 25°C ambient, Vin = 230 VAC / 50 Hz	-	-	13	A
Standby Power		-	-	0.15	W
Leakage Current		-	-	5.0	mA
Turn-on Voltage Threshold	Io = 50% Iomax	75	83	89	VAC
Turn-off Voltage Threshold	Io = 50% Iomax	66	70	75	VAC

3. OUTPUT SPECIFICATIONS

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Output Voltage	Full load	11.6	12	12.2	V
	No Load	12	13	13.3	
Load Regulation		-	-	5	%
Line Regulation		-	-	1	%
Output Ripple and Noise (Pk-Pk)		-	-	100	mV
Output Ripple and Noise (RMS)		-	-	50	mV
Output Current Range		0	-	4.2	A
Output Current Limit		4.3	-	6	A
Start-up Time		-	-	1100	ms
Hold up Time	Vin = 115 VAC	5	-	-	ms
Overshoot at Turn on		-	0	5	ms
Transient Response					
ΔV 50%~100% of Max Load		-	150	250	mV
Settling Time		-	-	2000	μs
ΔV 100%~50% of Max Load		-	150	250	mV
Settling Time		-	-	2000	μs

4. GENERAL SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Efficiency	Vin = 230 VAC, Io =100% load at 25°C ambient.	88	90	-	%
Switching Frequency		50	60	90	kHz
Isolation Characteristics		-	-	-	-
Input to Output		-	-	3000	VAC
Input to Earth		-	-	1500	VAC
Output to Earth		-	-	500	VAC
Isolation Resistance		10M	-	-	Ohm
Isolation Capacitance	IEC60950-1, UL60950-1	-	-	2200	pF
Material and Parts	RoHS Directive 2011/65/EU Compliant	-	-	-	-
MTBF			4518862.8715		hours
Weight		-	136.5	-	g
E-Cap Life	Vin = 115 VAC / 60 Hz or 230 VAC / 50 Hz, Io = 100% load at 40°C ambient.	15	-	-	years

5. ENVIRONMENT

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Ambient Temperature		-5	-	50	°C
Storage Temperature		-40	-	85	°C
Operating Humidity		10	-	95	%
Storage Humidity		10	-	95	%
Operating Altitude		-	-	4000	m
Shock Test (Non-Operating)	50 G, 11 ms, 3 shocks for each direction	-	-	-	-
Vibration (Operating)	5-500 Hz, 2.09 Grms, 20 mins for each three axis	-	-	-	-

6. EFFICIENCY DATA

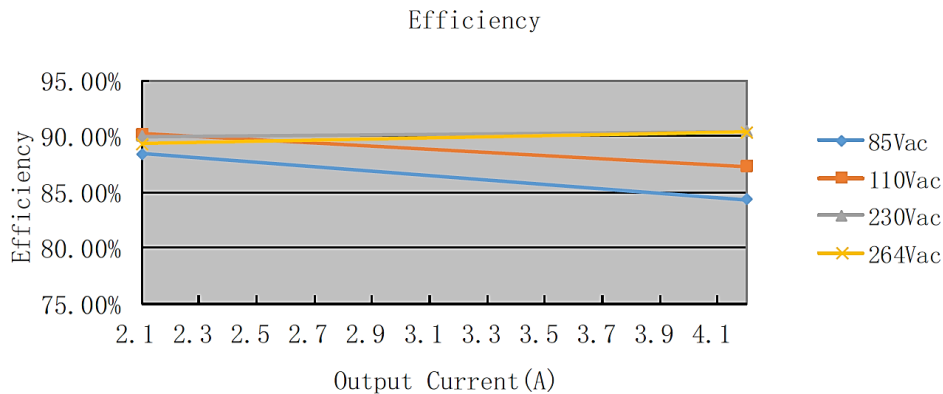


Figure 1. Efficiency vs Output Current



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

7. POWER IN NO-LOAD MODE

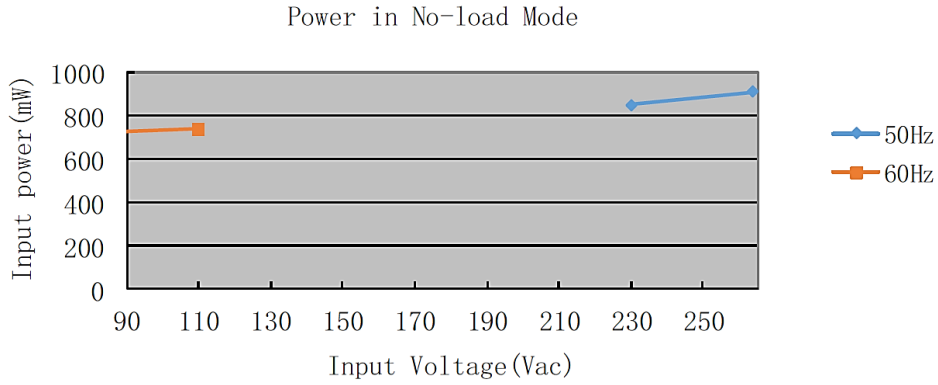


Figure 2. Power in No-Load Mode

8. THERMAL DERATING CURVES

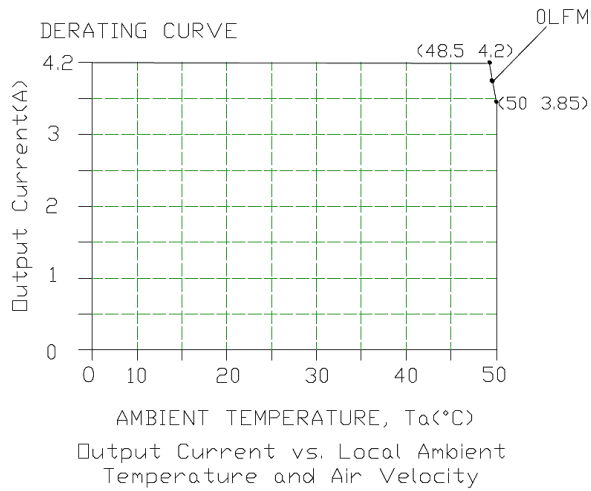


Figure 3. $V_{in} = 110 \text{ VAC}$

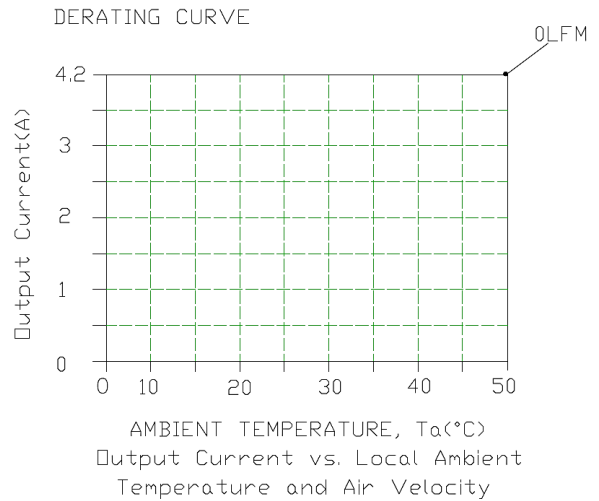


Figure 4. $V_{in} = 230 \text{ VAC}$

9. EMC

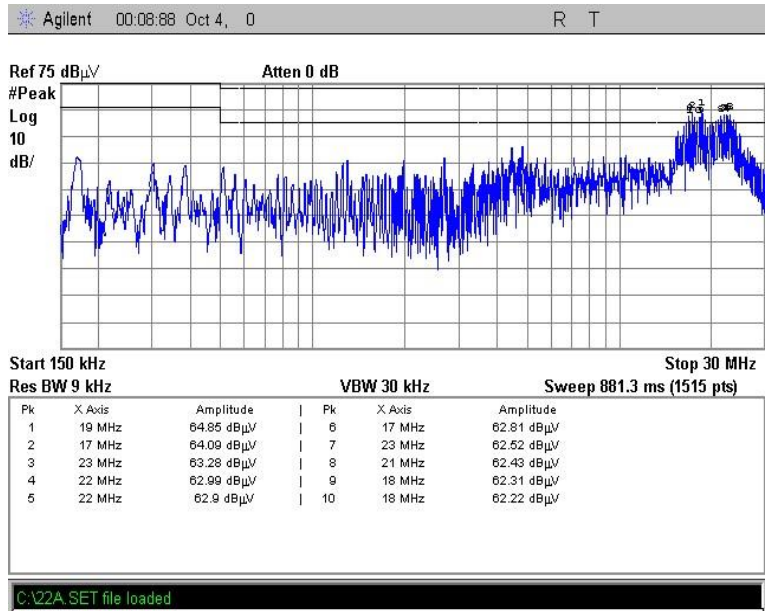
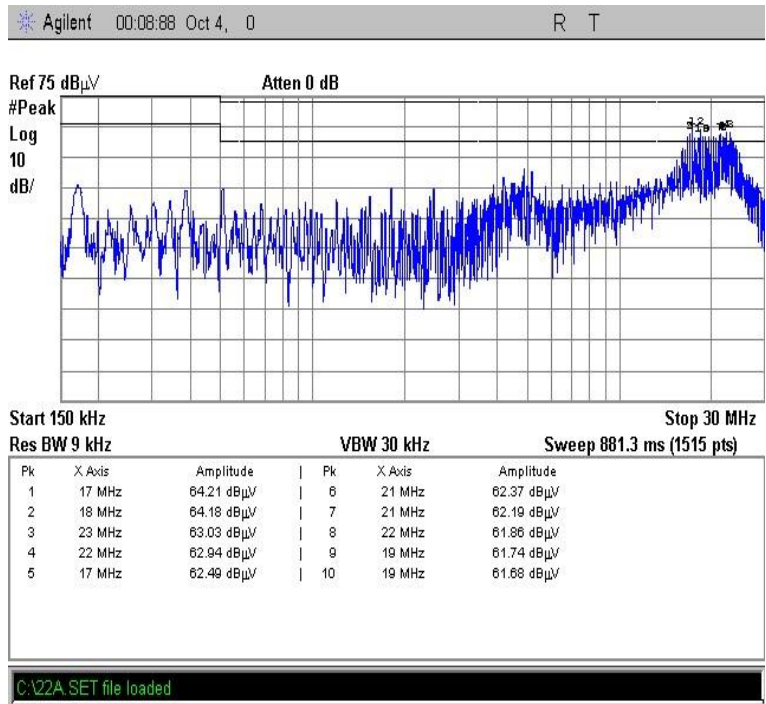


Figure 5.

10. RIPPLE AND NOISE WAVEFORMS

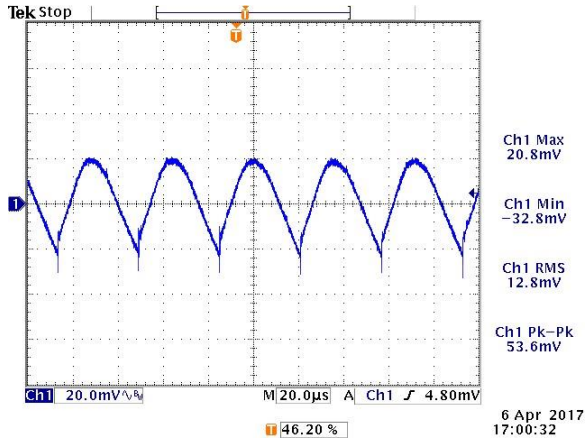


Figure 6. Ripple & Noise at full load, 115 VAC input, $T_a = 25^\circ\text{C}$

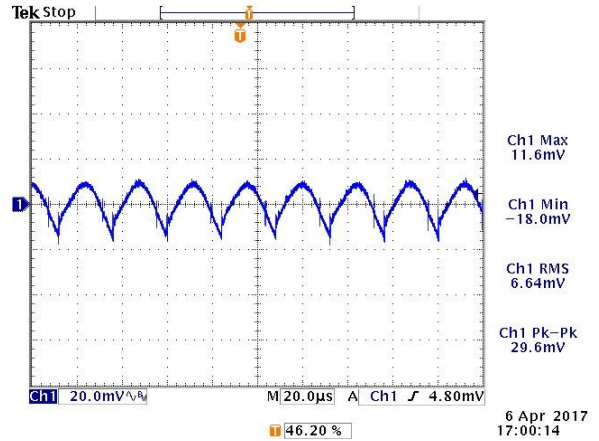


Figure 7. Ripple & Noise at full load, 230 VAC input, $T_a = 25^\circ\text{C}$

11. TRANSIENT RESPONSE WAVEFORMS

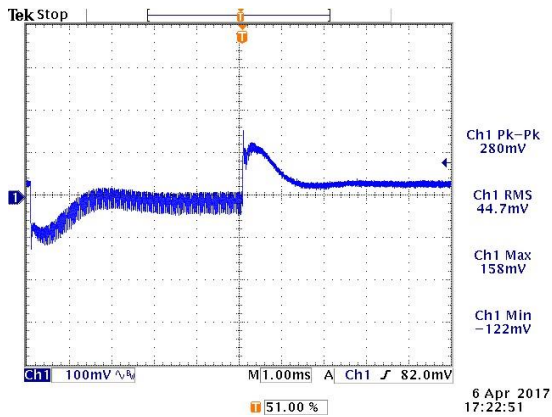


Figure 8. $V_{in} = 115 \text{ VAC}$, 50%-100% and 0.1A/us Load Transients



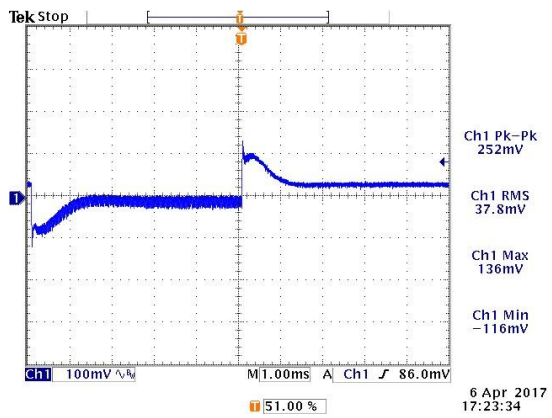


Figure 9. $V_{in} = 230 \text{ VAC}$, 50%-100% and 0.1A/us Load Transients

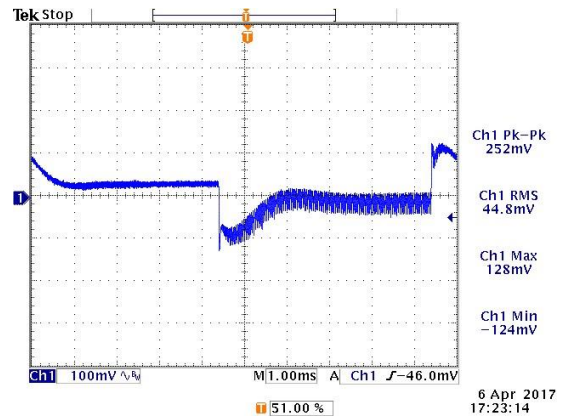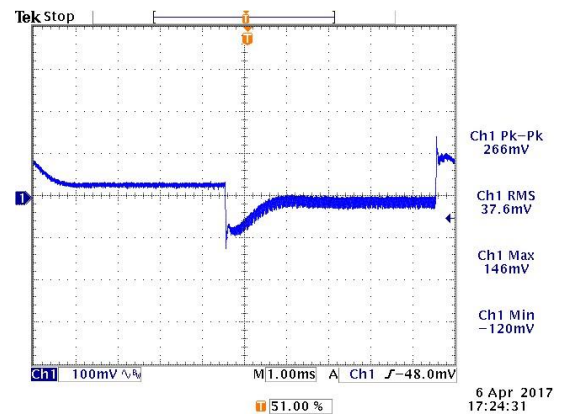

12. MECHANICAL DIMENSIONS

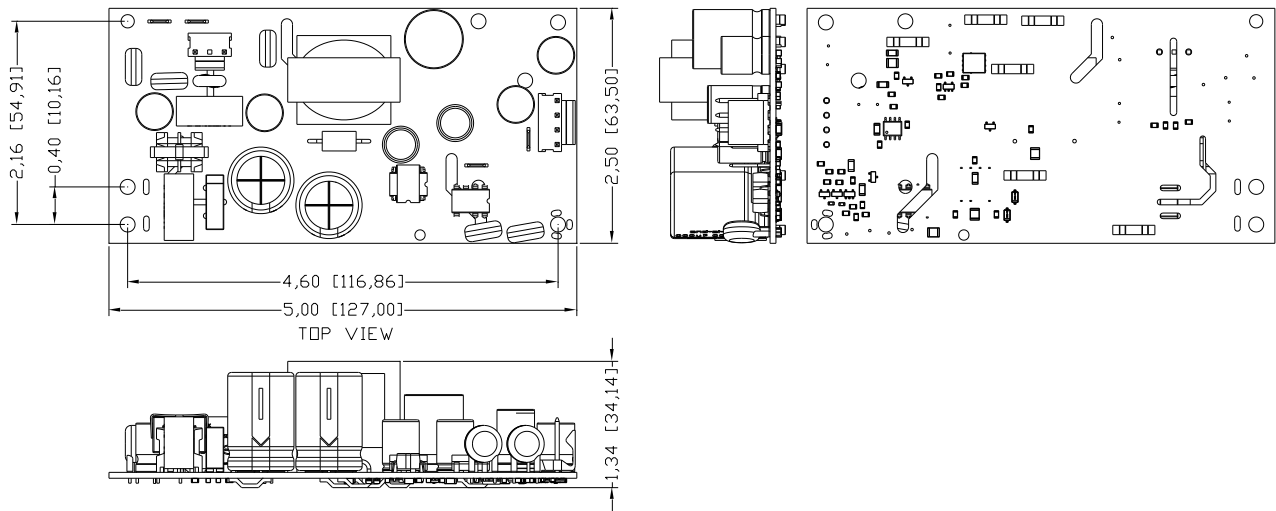


Figure 10. Mechanical Drawing

NOTE: All dimensions in inches (mm); Tolerances: XX ±0.04.

13. REVISION HISTORY

DATE	REVISION	CHANGE DESCRIPTION	APPROVAL
2017-04-26	AA	First release	XF Jiang
2017-11-13	AB	Update Input specifications, Output specifications and TD.	J Yao
2018-01-17	AC	Update General Specifications and Power in no-load mode.	J Yao

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



tech.support@psbel.com
belfuse.com/power-solutions

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)