


RED INDICATES ORIGINAL

| | | | | | | | | |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-------|-----------------|-----|------------|---------------|------|
| DWG SIZE | DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION. | | | REVISIONS | | | 3300/3400 | SH 1 |
| | | REV | EO | DESCRIPTION | OWN | APPROVED | DATE | |
| C | | V | 10795 | ADDED SUFFIX 22 | DKC | <i>DKC</i> | <i>8/1/94</i> | |

| TABLE 1 STD JACKS ACCOMMODATED |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| J3, J3W, J3A, J3WA, J3O, J3OD, J3E-N, J3WE-N, J3C-N, J3WC-N, J5, J5W, J13-R, J13W-R, J13C-N-R, J13WC-N-R, J72, J72S-N, J72D, JJ-042, J14, J14W, J14C-N, J14WC-N, J14T-R, J14WT-R, J14H, J14WH, J14HT-R, J14HNT-R, J14A, J14WA, J15-N, J15W-N |


| SUFFIX NO | TABLE 2 NONSTANDARD OPTIONS |
|--------------|--------------------------------------------------------------------------------|
| 01 | NO DS OR DS MTG HOLES |
| 02 | SUBST OSB (.87W) |
| 03 | SUBST OSB (.312W) |
| 04 | REAR MOUNT BACKBAR |
| 05 | OPTIONS 01 & 04 |
| 06 | NO PAINT (NO TFS-2) |
| 07 | OPTIONS 01, 04 & 06 |
| 08 | SEMIGLOSS ENAMEL TT-E-528C PER MIL-STD-808/F-302, TYPE I CLR 24872/FED STD 595 |
| 09 | CLR 17038/FED STD 595 |
| 10 | ONE DS11 ONLY |
| 11 | CLR 26329/FED STD 595 |
| 12 | CL SLOTS EIA-310 |
| 13 | OPTIONS 11 & 12 |
| 14 | SUBST OSB (.424 W) |
| 15 | OPTION 01 & PAINT TFS-2 EXCEPT CLR 26492/FED STD 595 |
| 16 | OPTIONS 02 & 12 |
| 17 | CLR 23617/FED STD 595 |
| 18 | CLR 24554/FED-STD-595 |
| 19 | CLR 25492/FED-STD-595 |
| 20 | MARK BACKBAR IAW TMS-3A |
| 21 | OPTIONS 02 & 20 |
| 22 | CLR 28440/FED-STD-595 SUBST OSB (.87W) |

| TABLE 3 | | |
|------------------|-------------------|--------------|
| BASIC PART NO | BASIC MODEL NO | PANEL TYPE |
| 3300 | JS-56 | NONINSULATED |
| 3400 | JSI-56 | INSULATED |

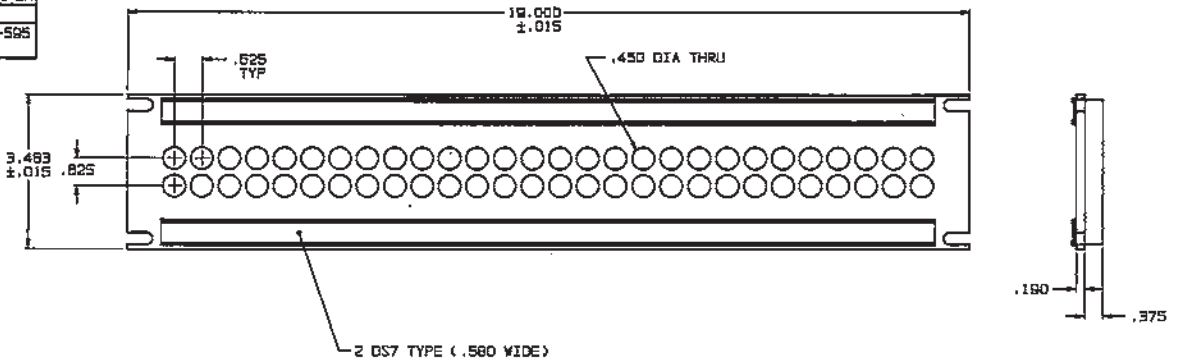

△ FOR OPTION 12, 13 AND 16 USE 850-0000-44

- 6. .008 MAX ADDED PER PAINTED SURFACE
- 5. STANDARD CONFIGURATION SHOWN NONSTANDARD OPTION SUFFIX ON PART NO MAY CHANGE OR ELIMINATE DIM AND/OR FEATURES SHOWN

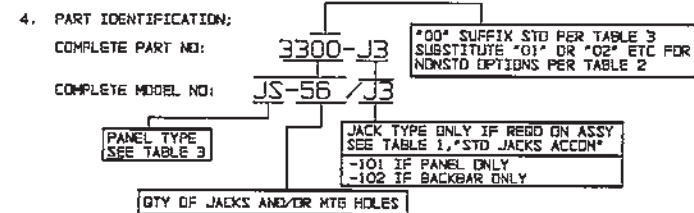

- 3. PANEL PER EIA-310
- 2. STD FINISH, TFS-2: LIGHT GRAY SEMIGLOSS ENAMEL, MTL-E-150008, TYPE III, CLASS 2 COLOR NO 28307/FED-STD-595
- 1. ALL DIM ARE IN INCHES

| QTY | DESCRIPTION | PART NUMBER | ITEM |
|------|-------------------------------------------------------------------|-------------------------------------|---------------------------|
| | TOL UNLESS SPECIFIED .XX ±.03 .XXX ±.010 .XXXX ANGLES | TROMPETER RF connectivity | JS-56/JSI-56 |
| OWN | DKC 7-28-94 | MATERIAL | ECCO IDENT |
| CHK | <i>DKC</i> 7-29-94 | 14948 | DRAWING NO. 3300/3400 |
| ENGR | | | REV V |
| APPR | <i>KY</i> 8/1/94 | SCALE 1/2 | DATE 7-24-78 SHEET 1 OF 2 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Patch Panels](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[MMVP96K2N75T](#) [MMVP96K2NNT](#) [MMVP96K2NT](#) [MMVP96K3NNT](#) [QGPK1LCM](#) [QGPK3CAT5E](#) [QGPK3CAT5ES](#) [QGPK3LC](#)
[QGPK3LCM](#) [QGPK3ST](#) [QGPK3STM](#) [DS303](#) [DS311](#) [DS317](#) [JS-16](#) [JSH-24](#) [QGPK1CAT5ES](#) [QGPK1CAT6S](#) [QGPK1SC](#) [QGPK1SCM](#)
[QGPK1ST](#) [QGPK1STM](#) [QGPK3CAT6](#) [QGPK3CAT6S](#) [QGPK3SC](#) [TT91202](#) [TT91402](#) [MMVP48K275T](#) [MMVP48K2NNT](#)
[MMVP48K2NT](#) [MMVP96K275T](#) [MMVP96K375T](#) [MMVP96K3N75T](#) [JSIS-72](#) [K576](#) [DS385](#) [Switchcraft TT518](#) [TT95DC](#) [TT91002](#)
[DS368](#) [JS-36A](#) [JSI-8D2SF24](#) [JSIX-64S](#) [JSI-48A](#) [JS-52W](#) [JSI-40S](#) [K6004B](#) [314DI](#) [K6002D](#) [MMVPTL](#)