


LDW120 Series

120W DIN Rail Switching Power Supply

LDW120 Series are single or two phase AC or DC input DIN Rail Switching Power Supplies.

Its compact size, high efficiency, excellent reliability together with easy installation makes it ideal for various industrial telecom and renewable energy applications.

LDW120 Series are Class I isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.

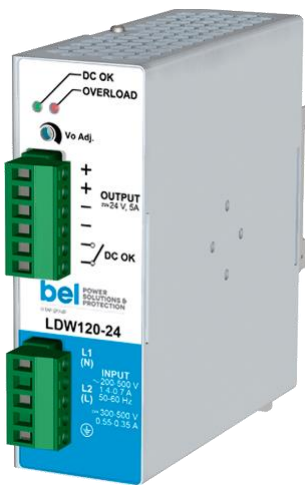

Key Features & Benefits

- High efficiency and compact size
- Only 40 mm width aluminum enclosure
- Single or two phase input AC 187 - 550 VAC
- Wide DC input range 250 - 725 VDC
- Overload 150%
- Excellent reliability
- RoHS Compliant

Applications

- Industrial Control
- Communication
- Instrumentation Equipment
- Renewable



bel POWER SOLUTIONS & PROTECTION

a bel group

belpowersolutions.com

1. MODEL SELECTION

| MODEL | INPUT VOLTAGE | # of PHASES | OUTPUT VOLTAGE | OUTPUT CURRENT | REDUNDANCY |
|------------|--------------------------------|-------------|----------------|----------------|-------------------------------|
| LDW120-12 | 200 - 500 VAC (300 - 500 VDC) | 1 / 2 | 12 - 15 VDC | 8 - 7 A | |
| LDW120-24 | 200 - 500 VAC (300 - 500 VDC)) | 1 / 2 | 24 VDC | 5 A | |
| LDW120-48P | 200 - 500 VAC (300 - 500 VDC) | 1 / 2 | 48 VDC | 2.5 A | Includes internal ORing diode |

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 400 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------------------|--|--|
| Input AC Voltage Range | Rated, single or two phase, UL certified Operating | 200 - 500 VAC 187 - 550 VAC |
| Input DC Voltage Range | Rated, UL certified Operating | 300 - 500 VDC 250 - 725 VDC |
| Input Frequency Range | | 47 - 63 Hz |
| Input AC Current | | Vin = 200 VAC 1.4 A Vin = 500 VAC 0.7 A |
| Input DC Current | | Vin = 250 VDC 0.8 A Vin = 300 VDC 0.55 A Vin = 500 VDC 0.35 A Vin = 725 VDC 0.3 A |
| Inrush Peak Current | | ≤ 40 A |
| Touch (Leakage) Current | | ≤ 1 mA |
| Internal Protection Fuse | None, external fuse must be provided | |
| Recommended External Protection | It is strongly recommended to provide external surge arresters (SPD) according to local regulations. | MCB 6 A C curve or 6 A D curve |

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---|---|---|
| Output Power | | 120 W |
| Rated Voltage (Voltage Adjustment Range) | LDW120-12 LDW120-24 LDW120-48P | 12 - 15 VDC (12 - 15 VDC) 24 VDC (23 - 28 VDC) 48 VDC (45 - 55 VDC) |
| Continuous Current | LDW120-12 LDW120-24 LDW120-48P | 8 - 7 A 5 A 2.5 A |
| Overload Limit (30 s) | LDW120-12 LDW120-24 LDW120-48P | 10 A 7.5 A 3.75 A |
| Short Circuit Peak Current | LDW120-12 LDW120-24 / LDW120-48P | 20 A 14 A |
| Load Regulation | | ≤ 1% |
| Ripple & Noise ¹ | | ≤ 110 mVpp |
| Hold up Time | | Vin = 240 VAC ≥ 17 ms Vin = 400 VAC ≥ 60 ms |
| Protections | Overload, short circuit: Hiccup mode Over temperature Overvoltage | |
| Output Over Voltage Protection | LDW120-12 LDW120-24 LDW120-48P | ≥ 18 VDC ≥ 33 VDC ≥ 68 VDC |

| | |
|---------------------|---|
| Status Signals | DC OK - green LED OVERLOAD - red LED DC OK - dry contact (NO, 24 VDC / 1 A) |
| Parallel Connection | Possible for redundancy (with external ORing module) P (models) - include internal ORing circuit |
| Efficiency | LDW120-12 > 81% LDW120-24 > 88% LDW120-48P > 86% |
| Dissipated Power | LDW120-12 < 25 W LDW120-24 < 17 W LDW120-48P < 19.5 W |

¹ Ripple and Noise are measured with 20 MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

NOTE: Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION | |
|------------------------------|--|---|--------------------|
| Operating Temperature | UL certified up to 45°C (Start-up type tested: - 40°C) ² | - 40 to + 70°C | |
| Storage Temperature | | - 40 °C - + 80°C | |
| Derating | | - 1.2 W / °C over 60°C | |
| Humidity | Non-condensing | 5 - 95% RH | |
| Life Time Expectancy | At 25°C ambient, full load | 84914 h (9.6 years) | |
| Overvoltage Category | | III (EN50178) | |
| Pollution Degree | | 2 (IEC60664-1) | |
| Protection Class | | Class I | |
| Isolation Voltage | Input to Output Input to Ground Output to Ground | 4.2 kVDC 2.2 kVDC 0.75 kVDC | |
| Safety Standards & Approvals | UL508 (certified) EN60950 (reference) EN50178 (reference) | | |
| EMC Standards | Emission | EN55011 (CISPR11) EN55022 (CISPR22) | Class A Class A |
| | Immunity | EN61000-4-2 | Level 3 |
| | | EN61000-4-3 | Level 3 |
| | | EN61000-4-4 | Level 3 |
| | | EN61000-4-5 | Level 4 |
| | EN61000-4-11 | Level 2 | |
| Protection Degree | EN60529 | IP20 | |
| Vibration Sinusoidal | IEC 60068-2-6 | IEC 60068-2-6:2007 (5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2Hours / axis (X, Y, Z) | |
| Shock | IEC 60068-2-27 | IEC 60068-2-27:2008 (30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total) | |

² Possible with load derating.

5. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|------------------------|------------------------------------|-----------------------------|
| Weight | | 500 g |
| Dimensions (W x H x D) | | 40 x 115 x 110 mm |
| Mounting Rail | | IEC 60715/H15/TH35-7.5(-15) |
| Connection Terminals | Screw type pluggable (24 - 12 AWG) | 2.5 mm ² |
| Case Material | Aluminum | |



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200


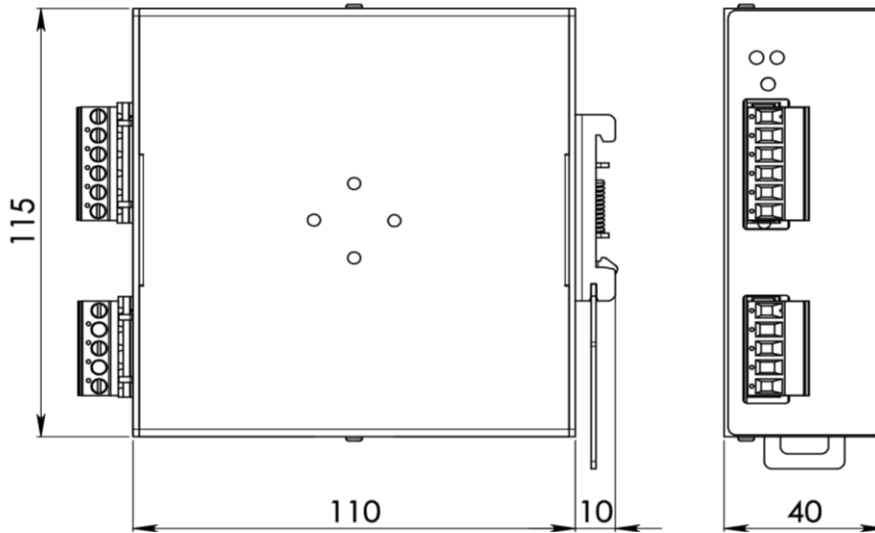


Figure 1. Mechanical Drawing

6. PIN LAYOUT & DESCRIPTION

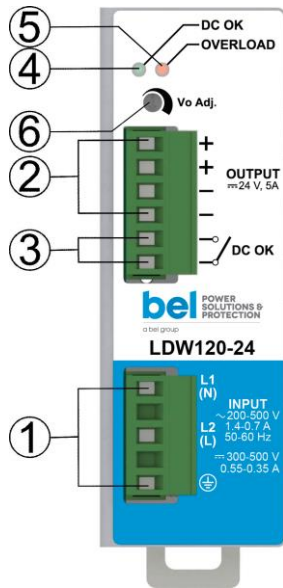

| PIN | DESCRIPTION |
|-----|---|
| 1 | AC/DC input |
| 2 | DC output (load) |
| 3 | Diagnostic Output (dry contact, NC output OK) |
| 4 | Green LED: Output OK |
| 5 | Red LED: Overload |
| 6 | Output voltage adjustment |

| INPUT CONNECTION | OUTPUT CONNECTION |
|---|---|
| Single phase: L = Line N = Neutral ⊕ = Earth ground | + = Positive DC - = Negative DC |
| Two phase: L1 = Phase 1 L2 = Phase 2 ⊕ = Earth ground | Signaling: DC OK: dry contact NO COM |
| DC: L1(N) = - Negative DC L2(L) = + Positive DC ⊕ = Earth ground | |

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVP06XA-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#)
[DVP08ST11N](#) [DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [PS-UPS40](#) [PSC-6024](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [ZI-20](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#)