

MBC300 Series

AC-DC Open Frame Power Supplies

Medical

The MBC300 Series of open-frame medical power supplies, with its wide universal 90-264 VAC input range, is available at 300 W of output power and a variety of single output voltages.

The MBC series is designed and approved to the latest Medical standards (EN/IEC 60601-1), providing 2 x MOPP (Means of Patient Protection) isolation for Class I & Class II applications.

These medical power supplies are ideal for monitoring, home health equipment as well as surgical devices.



Key Features & Benefits

- 5.0 x 3.0 x 1.5 in (127.0 x 76.2 x 38.1 mm)
- Approved to EN/IEC 60601-1
- 2x MOPP
- 12 V fan output
- 5 V standby output
- IEC Protection Class Options:
 - Class I: Earth pin J4 (no suffix)
 - Class II: No Earth pin (-2 suffix)
- EMI Class B
- Medical Safety Agency Approvals
- RoHS Compliant
- CE marked

Applications

- Diagnostic
- Drug Pump
- Dialysis
- Home Health Care
- Monitoring
- Imaging

1. MODEL SELECTION

MODEL ¹	CONNECTOR	OUTPUT VOLTAGE	MAX LOAD		MINIMUM LOAD	RIPPLE & NOISE ²	POWER
			CONVECTION	300 LFM			
MBC300-1T05G	Screw Terminal	5 VDC	28.0 A	40.0 A	0.0 A	2%	200 W
MBC300-1T12G	Screw Terminal	12 VDC	16.67 A	25.0 A	0.0 A	2%	300 W
MBC300-1T15G	Screw Terminal	15 VDC	13.33 A	20.0 A	0.0 A	2%	300 W
MBC300-1T24G	Screw Terminal	24 VDC	8.33 A	13.54 A	0.0 A	2%	325 W
MBC300-1T30G	Screw Terminal	30 VDC	6.67 A	10.83 A	0.0 A	2%	325 W
MBC300-1T48G	Screw Terminal	48 VDC	4.17 A	6.77 A	0.0 A	2%	325 W
Cover-300-XBC ³	Metal cover kit accessory						

¹ Class II means without input Earth pin. Add suffix "-2" at the end of the Model Number to order Class II version.

² Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Electrolytic capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

³ When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal	90 – 264 VAC / 120 – 390 VDC
Input Frequency		47 to 63 Hz
Input Current	120 VAC 230 VAC	3.2 A max 1.65 A max
Inrush Current	120 VAC 230 VAC	35 A max 65 A max
Leakage Current	120 VAC 230 VAC	< 125 µA < 250 µA
Switching Frequency	PFC converter (fixed) Resonant converter (variable)	80 kHz typical 35 to 250 kHz, 90 kHz typical

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Voltage ⁴		12 to 48 V
Stand-by Output ⁵		5 VDC
Output Power ^{6, 7}	Derate linearly to 80% from 90 VAC to 80 VAC input.	200 to 325 W
Efficiency	120 VAC 230 VAC	88% typical 92% typical
Hold Up Time	120 / 230 VAC	10 ms
Power Factor	120 VAC 230 VAC	0.98 0.95
Line Regulation		± 0.5 %
Load Regulation		± 2 %
Transient Response	50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/μs,	< 10 %, recovery time < 5 ms
Rise Time		< 100 ms
Set Point Tolerance		± 1 %
Voltage Output Adjustment		± 3 %
Over Voltage Protection	Automatic recovery	110 to 150 %
Over Current Protection		110 to 150 %
Short Circuit Protection	Short term, automatic recovery	
Over Temperature Protection	Automatic Recovery	110° C primary heat sink
Cooling ⁸	Convection	5 V model 140 W max 12, 15, 24, 30 & 48 V models 200 W max
		5 V model 200 W max 12 & 15 V models 300 W max
	With 300 LFM	24, 30 & 48 V models 325 W max

⁴ Peak current rating on main output is 120% of max., lasting < 30 s with a maximum 10% duty cycle.

⁵ Standby output voltage tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.

⁶ Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.

⁷ Derate output power linearly to 80% from 90 VAC to 80 VAC input.

⁸ Refer de-rating curves to determine output power over the entire operating temperature range

4. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions ⁹	EN 55011-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55011 B	Pass
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 4, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 4, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion A & B

⁹ Class 2 product meets Class A limit line for conducted emission.

5. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output (2 MOPP)	4000 VAC
	Input to Earth (1 MOPP)	1500 VAC
	Output to Earth (1 MOPP)	500 VAC
Safety Standards	EN 60601-1, IEC 60601-1 (ed.3), ANSI / AAMI ES 60601 - 1, CSA C22.2 No. 60601-1	
Agency Approvals	Nemko	
CE mark	Complies with LVD Directive	

6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	Refer to de-rating curves -20 to 0°C start-up is guaranteed	-20 to 70°C
Storage Temperature		-40 to 85° C
Relative Humidity	Non Condensing	95% Rh
Altitude	Operating:	10,000 ft.
	Non-Operating:	40,000 ft.
Reliability	MTBF according to Telcordia –SR332-issue 3	1.77 million hours

7. SIGNALS

PARAMETER	DESCRIPTION / CONDITION
Power Good ¹⁰	TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s
Remote On/ Off	To turn on PSU short remote pin to ground
Remote Sense	Compensates for 200 mV drop

¹⁰ Power good signal cannot be used as a current source. Internal pull up resistor from PG signal to 5V is 10K. It is recommended to use external transistor if intended to source current.


8. CONNECTOR & PIN DESCRIPTION

CONNECTOR	PIN	DESCRIPTION / CONDITION	MANUFACTURER / PN
AC Input Connector	J1	Pin 1	AC LINE
		Pin 2	AC NEUTRAL
DC Output Connector	J2	Pin 1	RTN
		Pin 2	V1
Signals & Aux Power	J3 ¹¹	Pin 1	REMOTE ON/OFF
		Pin 2	RTN
		Pin 3	VFAN (+12 V/0.5 A)
		Pin 4	-VE REMOTE SENSE
		Pin 5	VSTBY (+5 V/2 A, +/-5%)
		Pin 6	+VE REMOTE SENSE
		Pin 7	RTN
		Pin 8	POWER GOOD
Earth (Spade Connector)	J4 ¹²	(Class I product only)	Molex: 19705-4301 Mating: 190030001

¹¹ PSU is supplied with J3 housing, pin-1 and pin-2 shorted to enable main output without remote on/off feature.


¹² Class 1 models only.

9. DERATING CURVES

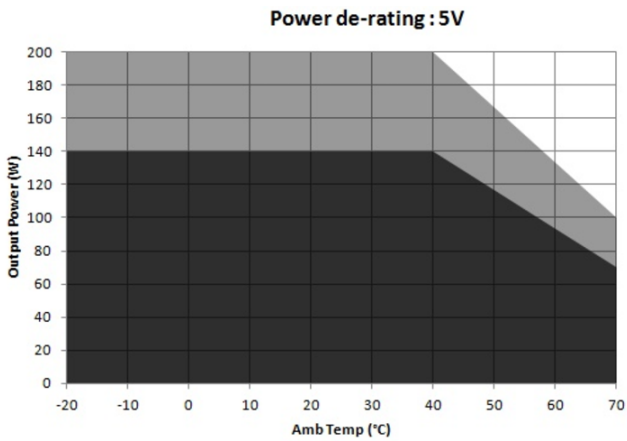


Forced air cooled load: 200 W up to 40°C
De-rate above 40 °C @ 1.67% per °C

Convection load: 140 W up to 40°C
De-rate above 40 °C @ 1.67% per °C

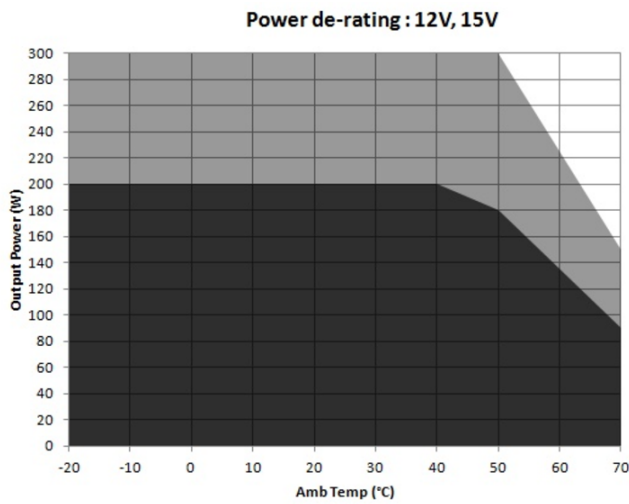

Forced air cooled load: 300 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

Convection load: 200 W up to 40°C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

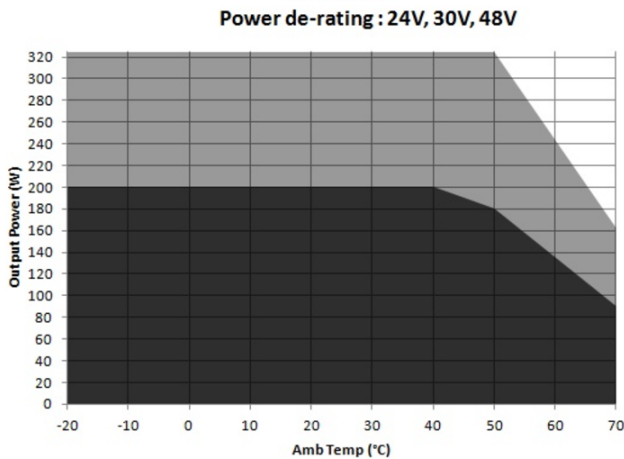

Forced air cooled load: 325 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

Convection load: 200 W up to 40°C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

Figure 1. Derating Curves

10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	450 g (0.99 lbs)
Dimensions	127.0 x 76.2 x 38.1 mm (5.0 x 3.0 x 1.5 inch)

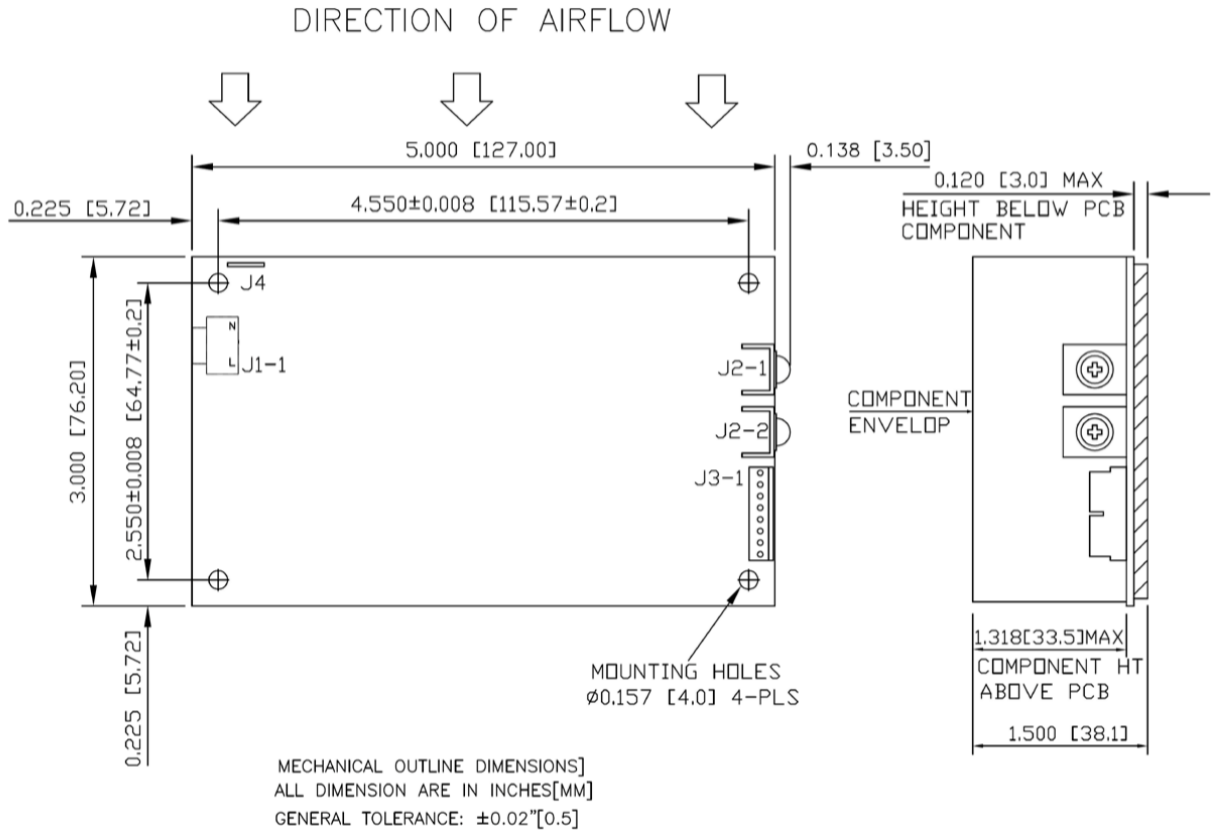


Figure 2. Mechanical Drawing

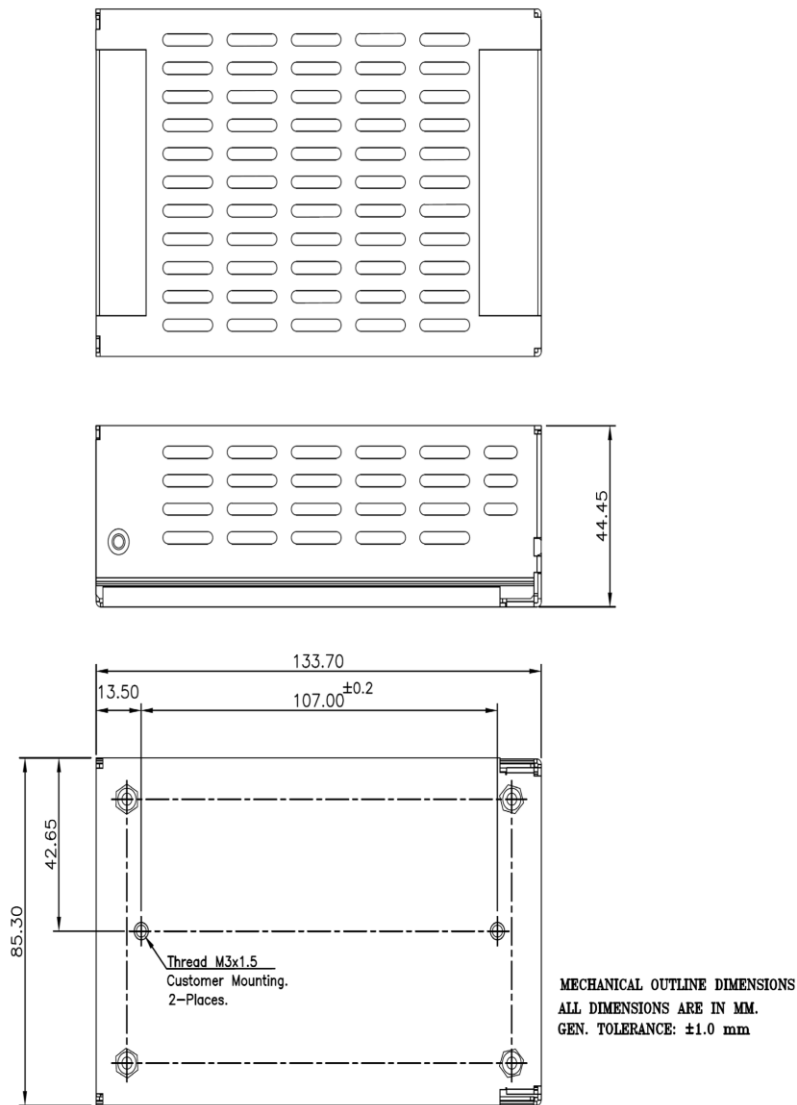


Figure 3. Mechanical Drawing with Cover Kit

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#)
[WRB01X-U](#) [LPX140-C](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#)
[VI-RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#)