



Features

- RoHS lead solder exemption compliant
- Power Factor Correction meets EN61000-3-2 (AC input versions)
- Fully-regulated outputs
- Remote sense
- Logic level Inhibit
- Current Share, Power Fail, and Power Good Signals
- Overtemperature, overvoltage, and overcurrent protected
- Available with metric or SAE mountings
- Input transient & ESD compliance to EN61000-4-2/-3/-4/-5
- Fan output voltage and optional fan
- Optional isolation diodes for parallel or redundant operation
- DC input versions (36-75VDC)

Description

The PFC500/PDC500 products of the PerFormanCe Power Series combine high performance midrange power with high power density (4.4 watts/in³) and high reliability to meet the requirements of communications, commercial, and industrial systems.

Providing tightly regulated DC power, the PFC500/PDC500 delivers full output performance with only 300 Linear Feet per Minute (LFM) forced-air cooling (factory-installed fan optional). Main channel current sharing is provided for redundant applications, and AC input units can be paralleled with DC input versions. Units are available with SAE mountings or optional metric mountings.

The PFC500/PDC500 product line is approved to the latest international regulatory standards, and displays the CE Mark.

Single-Output Model Selection

| MODEL | OUTPUT VOLTAGE | ADJUSTMENT RANGE | MAXIMUM OUTPUT CURRENT (NOTE 3) | LINE REGULATION | LOAD REGULATION (NOTE 4) | RIPPLE & NOISE %p-p (NOTE 5) | INITIAL SETTING ACCURACY |
|---|----------------|------------------|---------------------------------|-----------------|--------------------------|------------------------------|--------------------------|
| PFC500-1024/PDC500-1024D (NOTE 1) | 24V | 21.6V to 26.4V | 21A | 0.5% | 0.2% | 1% | 23.88V to 24.12V |
| PFC500-1028 (NOTE 2) | 28V | 25.2V to 30.8V | 17.9A | 0.5% | 0.2% | 1% | 27.86V to 28.14V |
| PFC500-1048 (NOTE 2) | 48V | 46.0V to 56.0V | 10.4A | 0.5% | 0.5% | 1% | 47.52V to 48.48V |

- NOTES:**
- 1) For AC input, use PFC500 prefix; use PDC500 prefix for DC input versions.
 - 2) Consult factory for availability of 28V and 48V units with DC input.
 - 3) Output currents ratings are expressed with 300 LFM forced air.
 - 4) Remote sense connected. See Application Note #P1 for load regulation when using the D option for 24V units.
 - 5) Maximum peak to peak noise expressed as a percentage of output voltage, 20 MHz bandwidth. For ripple/noise on "D" option models, see options data on page 3.

PFC500 Input Specifications

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|----------------------|--|------|--------------------|----------|-------|
| Input Voltage - AC | Continuous input range. | 85 | | 264 | VAC |
| Input Frequency | AC Input. | 47 | | 63 | Hz |
| Brown Out Protection | Lowest AC input voltage that regulation is maintained with full rated loads. | 85 | | | VAC |
| Hold-Up Time | Over full AC input voltage range at full rated load. | 20 | | | ms |
| Input Current | 85 VAC at full rated load. | | | 7.8 | ARMS |
| Input Protection | Non-user serviceable internally located AC input line fuse, F10A, 250V. | | | | |
| Inrush Surge Current | Internally limited by thermistor, one cycle, 25°C. | | 110 VAC 220 VAC | 35 65 | APK |
| Power Factor | Per EN61000-3-2. | 0.98 | | | W/VA |
| Operating Frequency | Switching frequency of main transformer. | | 100 | | kHz |

PDC500 Input Specifications

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|------------------------|---|-----|-----|-----|-------|
| Input Voltage - DC | Continuous input range. Full power at 42-75 VDC. Derate linearly from 40 VDC to 36 VDC, 400W. | 36 | | 75 | VDC |
| Low Voltage Protection | Lowest DC input voltage. | 34 | | | VDC |
| Hold-up Time | At full load over DC input range. | 17 | | | ms |
| Input Current | 48 VDC at full rated load. | | | 14 | ADC |
| Input Protection | Non-user serviceable internally located fuse. | | | | |
| Inrush Surge Current | Vin = 75 VDC, cold thermistor. | | | TBD | APK |

Output Specifications (PFC500 and PDC500)

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|------------------------|--|----------------------------|-----|-------------------|-------|
| Efficiency | Full rated load, 110 VAC (PFC500)/ 48VDC (PDC500). | 75 | | | % |
| Minimum loads | PFC/PDC500-1024 PFC500-1028 PFC500-1048 | 0.6 0.6 1.2 | | | Amps |
| Ripple and Noise | Full load, 20 MHz bandwidth. | See Model Selection Charts | | | |
| Output Power | 300 LFM forced air cooling required for operation. See optional fan. Continuous power, multiple output models. PDC500 requires derating below 42 VDC; see PDC500 input specifications. | | 500 | | Watts |
| Overshoot / Undershoot | Output voltage overshoot/undershoot at turn-on. | | | 0 | V |
| Regulation | Without connection of remote sense. PFC/PDC500-1024 PFC500-1028 PFC500-1048 | | | 0.8 0.7 1.0 | % |
| Transient Response | Recovery time, to within 1% of initial set point due to a 50-100% load change, 3% max. deviation. | | 1 | | ms |
| Turn-on Delay | Time required for initial output voltage stabilization. | | | 1 | Sec |
| Turn-on Rise Time | Time required for output voltage to rise from 10% to 90%. | | 10 | | ms |

Interface Signals and Internal Protection (PFC500 and PDC500)

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|----------------------------|--|-------------------------|-----|-------------------------|-------|
| Overvoltage Protection | PFC/PDC500-1024 PFC500-1028 PFC500-1048 | 27.0 32.0 60.0 | | 30.7 35.0 70.0 | V |
| Overload Protection | Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition. | | | | |
| Overtemperature Protection | System shutdown due to excessive internal temperature, automatic reset. | | | | |
| Remote Sense | Total voltage compensation for cable losses with respect to the main output. | | | 250 | mV |
| Current Share | Accuracy of shared current with up to 6 parallel units. | | | 10 | % |
| Inhibit | TTL compatible logic signal will inhibit outputs by the application of a logic low signal. An open circuit or external TTL high signal allows normal operation. | | | | |
| Input Power Fail Warning | TTL compatible logic signal. Time before regulation dropout due to loss of input power at 110 VAC. | 4 | | | ms |
| Power Good | TTL compatible signal. Signal is low if main output is greater or less than 10% of nominal. For models without the "D" option, internal pull-up resistor is 1kΩ. For "D" option, pull-up resistor is 475Ω. See Apps Note #P1 for details. PFC/PDC500-1024 PFC500-1028 PFC500-1048 | 22.08 25.20 44.20 | | 27.36 30.80 54.72 | V |
| Fan Voltage | Provides 170mA current to user supplied fan if fan option is not selected. | | 12 | | V |

Safety, Regulatory, and EMI Specifications

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|------------------------------|---|-----|----------|-----|-------|
| Agency Approvals | UL1950. UL 60950 / CSA60950-00 (cULus Mark) EN60950 (TÜV). PDC500 (Pending). | | Approved | | |
| Dielectric Withstand | Meets reinforced insulation of IEC60950. | | | | |
| Electromagnetic Interference | FCC CFR title 47 Part 15 Sub-Part B - Conducted. EN55022 / CISPR 22 Conducted. | B | | | Class |
| ESD Susceptibility | Per EN61000-4-2, level 4. | 8 | | | kV |
| Radiated Susceptibility | Per EN61000-4-3, level 3. | 10 | | | V/M |
| EFT/Burst (PFC500) | Per EN61000-4-4, level 4. | ±4 | | | kV |
| EFT/Burst (PDC500) | Per EN61000-4-4, level 4. | TBD | | | kV |
| Input Transient Protection | PFC500 Per EN61000-4-5 class 3. PDC500 (class 2) | | | | |
| | Line to Line (PFC500) | 1 | | | |
| | Line to Ground (PFC500) | 2 | | | |
| | Line to Line (PDC500) | 0.5 | | | kV |
| | Line to Ground (PDC500) | 0.5 | | | |
| Insulation Resistance | Input to output. | | 10 | | MΩ |
| Leakage Current (PFC500) | Per EN60950, 264 VAC. | | | 2.0 | mA |




Environmental Specifications

| PARAMETER | CONDITIONS/DESCRIPTION | MIN | NOM | MAX | UNITS |
|-------------------------|--|-----|-------|-------------------|------------------------|
| Altitude | Operating. Non-Operating. | | | 10k 40k | ASL Ft. ASL Ft. |
| Operating Temperature | Derate linearly above 50°C by 2.5% per °C. | | | | |
| | At 100% load | 0 | | 50 | °C |
| | At 50% load | 0 | | 70 | °C |
| Storage Temperature | | -55 | | 85 | °C |
| Forced Air Cooling | Forced air cooling of 300 LFM (400 LFM for PDC500) is required if the internal fan is not specified. Cooling air velocity is measured at the output exiting window (2.5" x 5"). Airflow direction is from the input section to the output section. | | | | |
| Temperature Coefficient | 0°C to 70°C (after 15 minute warm-up). | | ±0.02 | ±0.05 | %/°C |
| Relative Humidity | Non-Condensing. | 5 | | 95 | %RH |
| Shock | Operating: 10±3mSec, 3 axis, Half Sine. Non-operating: 10±3mSec, 3 axis, Half Sine. | | | 20 40 | G |
| Vibration | Operating: 5-32Hz 32-2000Hz Sinusoidal Non-operating: | | | 0.02 1 6.15 | in (DA) GPK GRMS |

Options

| DESCRIPTION | NOTES | SIZE IMPACT |
|------------------|--|--|
| Isolation Diodes | Add "D" as a suffix to the model number to order factory installed isolation diodes for parallel or redundant operation. For 24V models with the "D" option, external caps are required to meet the 1% noise/ripple spec. Power Good has a pull-up resistor of 475Ω on the 24V models. See Application Note #P1 for details. | N/A |
| Fan | Add "F" as a suffix to the model number to order integral fan. Fan provides the required 300 LFM (400 LFM for PDC500) of forced air cooling, or otherwise provided by the end user. | 10.50" x 5.00" x 2.50" (266.7mm x 127.0mm x 63.5mm) |
| Metric Mounting | Add "M" as a suffix to the model number to order chassis with M4 x 0.7 mounting inserts. | N/A |

Overall Size: 9.00" x 5.00" x 2.50" (228.6mm x 127.0mm x 63.5mm)
Overall Length With Fan: 10.50" (266.7mm)
Weight: 4.3 lb (1.95 kg)

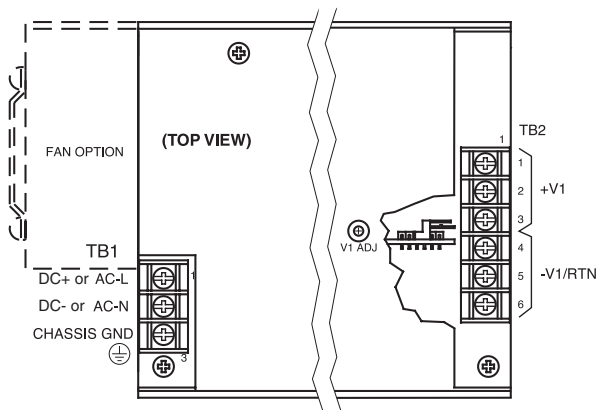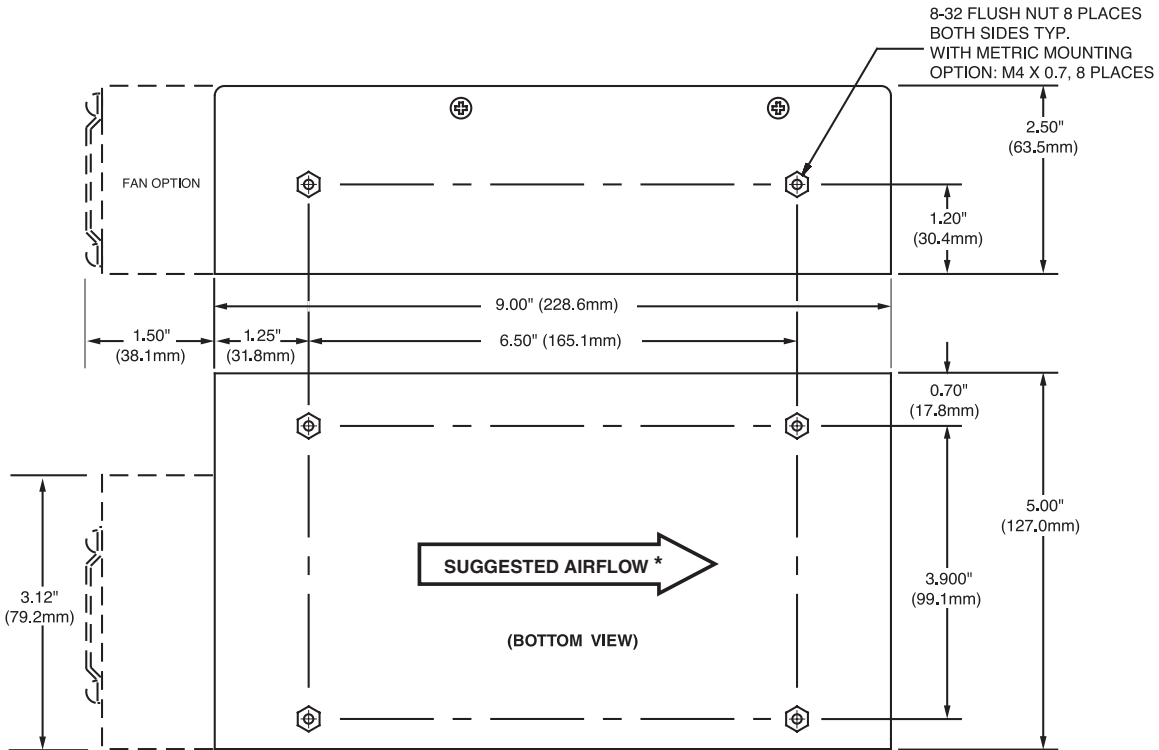

J4, J3, J5
 Molex Series 5048, 0.46mm
 Square pins on 2.50mm centers.
 Customer connection:
 P4,P3,P5 Mating Housing:
 Molex 5051, 5102, or Equiv.
 P4,P3,P5 Mating Terminals:
 Molex 4809 or 40445, or Equiv.

Input and Output Connections: 6-32 Screw Terminal on 0.375" (9.5mm) centers
 Chassis: 0.090" (2.3mm) Aluminum Alloy, With Clear Finish

* Airflow should be measured at the exiting window (5" x 2.5").

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FP80](#) [FRV7000G](#) [22929](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#) [WRB01X-](#)
[U](#) [LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-1219-18S](#)
[6504-226-2101](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#) [VI-](#)
[RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#)