


# Power Dividers

## Eight Way • Twelve Way

### 500 MHz - 18.0 GHz High Performance

- Full 2.0 - 18.0 GHz bandwidth units
- Low VSWR - High Isolation
- Rugged Stripline Construction
- Meets Mil-E-5400 and Mil-E16400 Environment

Midwest Microwave's series of high performance isolated Power Dividers are small, lightweight, ruggedly constructed stripline units that possess inherently low insertion loss and VSWR with high isolation and excellent phase and amplitude tracking. Units are available in multi-octave, and ultra-wideband frequency bandwidths covering the entire range of 0.5 - 18.0 GHz.

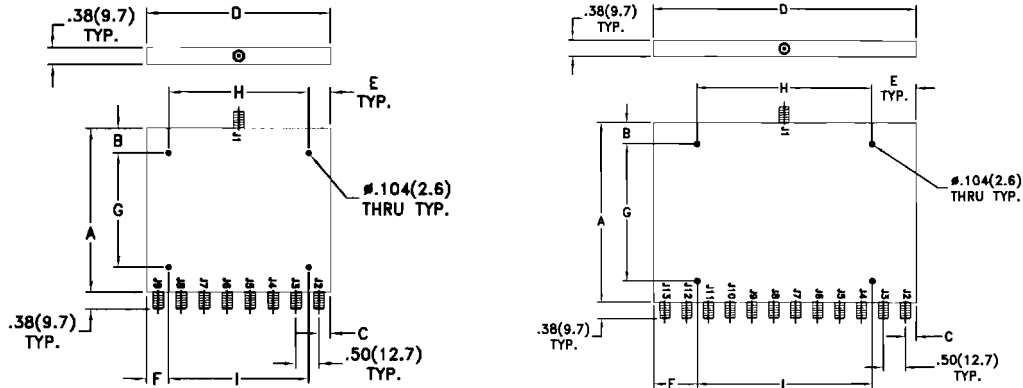

### ELECTRICAL SPECIFICATIONS


FREQUENCY RANGE (GHZ)	CASE STYLE	MODEL NUMBER	AMPLITUDE BALANCE (dB)	PHASE BALANCE (degrees)	INSERTION LOSS (dB) max	ISOLATION (dB) min	VSWR max	INPUT POWER max (W)
EIGHT WAY MULTI-OCTAVE TYPES								
.50-2.0	1	PWD-5520-08-SMA-79	0.5	5	1.0	15	1.50	10
2.0-8.0	2	PWD-5522-08-SMA-79	0.8	10	1.2	15	1.50*	10
5.0-19.0	3	PWD-5526-08-SMA-79	.03f	0.4f	0.4+.08f	20	1.50	10
2.0-18.0	2	PWD-5532-08-SMA-79	0.6	10	0.7+.10f	15	1.50	50
0.5-18.0	4	PWD-5530-08-SMA-79	1.0	15	1.0+.25f	15	1.50	30
TWELVE WAY MULTI-OCTAVE TYPES								
.50-2.0	8	PWD-5520-12-SMA-79	0.6	10	1.2	15	1.50	10
2.0-18.0	6	PWD-5522-12-SMA-79	0.8	10	1.0+.14f	15	1.50	10
6.0-18.0	5	PWD-5526-12-SMA-79	0.8	10	0.4+.10f	15	1.50	10
2.0-19.0	6	PWD-5532-12-SMA-79	1.0	15	1.0+.14f	15	1.50	30
0.5-18.0	7	PWD-5530-12-SMA-79	1.2	20	1.2+.30f	15	1.50	30

\* Output port, 1.35:1 max

### MECHANICAL SPECIFICATIONS - INCHES (mm)

CASE STYLE	A	B	C	D	E	F	G	H	I	WEIGHT	
										Oz	Gr
1	3.00 (76.2)	0.15 (3.8)	0.25 (6.4)	4.00 (101.6)	0.50 (12.7)	1.00 (25.4)	2.60 (66.0)	3.00 (76.2)	2.00 (50.8)	8.4	239
2	4.60 (116.8)	0.55 (14.0)	0.25 (6.4)	4.00 (101.6)	0.25 (6.4)	0.25 (6.4)	3.50 (88.9)	3.50 (88.9)	3.50 (88.9)	10.5	298
3	3.50 (88.9)	0.50 (12.7)	0.25 (6.4)	4.00 (101.6)	0.20 (5-1)	0.20 (5-1)	2.50 (63.5)	3.60 (91.4)	3.60 (91.4)	9.0	273
4	5.20 (132.1)	1.00 (25.4)	0.25 (6.4)	4.00 (101.6)	0.20 (5-1)	0.20 (5-1)	3.20 (81.3)	3.60 (91.4)	3.60 (91.4)	13.9	390
5	4.60 (116.8)	0.25 (6.4)	0.25 (6.4)	6.00 (152.4)	0.25 (6.4)	0.25 (6.4)	3.50 (88.9)	2.60 (66.0)	2.60 (66.0)	24.0	680
6	5.20 (132.1)	1.13 (28.7)	0.25 (6.4)	6.00 (152.4)	0.25 (6-4)	0.25 (6-4)	2.94 (74.7)	5.50 (139.7)	5.50 (139.7)	21.2	600
7	7.50 (190.5)	1.50 (38.1)	0.25 (6.4)	6.00 (152.4)	0.25 (6-4)	0.25 (6-4)	4.50 (114.3)	5.50 (139.7)	5.50 (139.7)	24.5	700
8	5.20 (132.1)	0.50 (12.7)	0.25 (6.4)	6.00 (152.4)	1.00 (25.4)	1.00 (25.4)	4.20 (106.7)	4.00 (101.6)	4.00 (101.6)	21.2	600

Note: 1. Specifications assume that all of the outputs are terminated with a load that has a VSWR not greater than 2.0:1.  
 2. TNC or NType output connectors are available by substituting "TNC" or "NNN" for "SMA" in the Model Number.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)  
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)  
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)  
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)  
[PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-103-PIN](#) [BD1222J50200AHF](#)