

## HPI Series

### Flexible Test Cable Assemblies



#### Features

- Best combination of price and performance
- Uses high performance HP190 cable
- Built with stranded center conductor and polyurethane jacket to increase flexibility
- 18 GHz operation
- Passivated stainless steel M39012 compliant interfaces
- Standard lengths stocked by distributors
- Custom Lengths available

#### Applications


- High end test laboratories
- Production test setups
- Production use

**Table 1**

Standard Part Numbers Available Through Franchised Distributors

Part Number	Series	Length	Description	Insertion Loss max. @ 18GHz
S119BPBS10012	HPI	12 in.	Polyurethane jacket, Stranded, SMA Straight Male to SMA Straight Male	0.67dB
S119BPBS10024	HPI	24 in.	Polyurethane jacket, Stranded, SMA Straight Male to SMA Straight Male	1.08dB
S119BPBS10036	HPI	36 in.	Polyurethane jacket, Stranded, SMA Straight Male to SMA Straight Male	1.49dB
S119BPBS10048	HPI	48 in.	Polyurethane jacket, Stranded, SMA Straight Male to SMA Straight Male	1.91dB
S119BPBS10060	HPI	60 in.	Polyurethane jacket, Stranded, SMA Straight Male to SMA Straight Male	2.32dB

# HPI Series Flexible Test Cable Assemblies

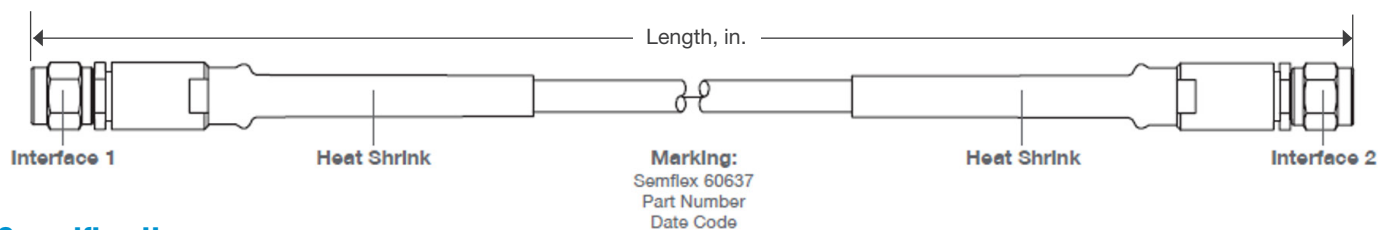

## Specifications

### Electrical

Frequency of Operation	DC-18 GHz
Impedance	50Ω (Nominal)
VSWR	1.25:1 (max.) for parts listed in table 1, see <b>table 2</b> for other configurations
Insertion loss	See table 1 for standard lengths

### Material and Finish

Connector Body and Coupling Nut	Passivated stainless steel
Connector Contacts	Gold plated beryllium copper
Cable	HP190 with stranded center conductor and polyurethane jacket
Workmanship	Class 2 per IPC/WHMA-A-620

### Mechanical

Length Tolerance	-0.0 / +0.5" for parts listed in table 1
Durability	500 cycles (min.)
Inside min Bend Radius	2.8" min

### Environmental

Operating Temperature	-55°C to 80°C
-----------------------	---------------

## Custom Part Number Creation

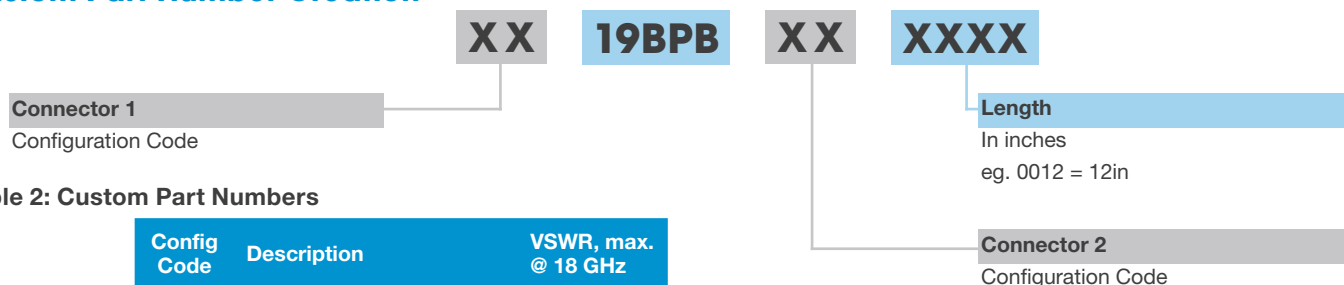


Table 2: Custom Part Numbers

Config Code	Description	VSWR, max. @ 18 GHz
S1	SMA Straight Male	1.25
S2	SMA Right Angle Male	1.30
S3	SMA Straight Female	1.25
N1	N Straight Male	1.30
N2	N Right Angle Male	1.30
N3	N Straight Female	1.30
T1	TNC Straight Male	1.30
T2	TNC Right Angle Male	1.30
T3	TNC Straight Female	1.30

Full part number configurator is available in the [Semflex Catalog](#), pages 4-5



Asia Pacific  
+86 21 5442 7668  
ccs.asia.sales@as.cinch.com

Europe, Middle East & Africa  
+44 (0) 1245 342060  
CinchConnectivity@eu.cinch.com

North America  
1 507.833.8822  
ccsorders@us.cinch.com

[belfuse.com/cinch](http://belfuse.com/cinch)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)  
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)  
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)  
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)  
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)  
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)