




## SMD POWER INDUCTORS

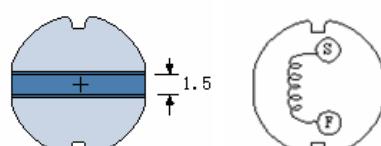



## • Features

1. Open frame construction.

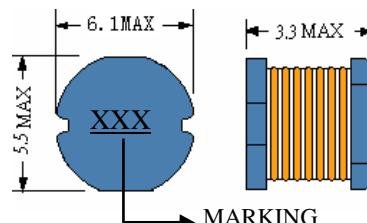

## ELECTRICAL CHARACTERISTICS

Part Number	Inductance (uH) <sup>(1)</sup>	Test Frequency	DC Resistance (Ω MAX) <sup>(2)</sup>	Saturation <sup>(3)</sup> Current (A)	Temperature Current (A)
SC53-4R2	4.2	7.96MHZ	70m	1.85	2.60
SC53-6R2	6.2	7.96MHZ	85m	1.75	2.20
SC53-100	10	2.52MHZ	0.11	1.30	1.85
SC53-120	12	2.52MHZ	0.13	1.23	1.60
SC53-150	15	2.52MHZ	0.16	1.10	1.50
SC53-180	18	2.52MHZ	0.18	1.05	1.40
SC53-220	22	2.52MHZ	0.23	0.93	1.30
SC53-270	27	2.52MHZ	0.25	0.84	1.20
SC53-330	33	2.52MHZ	0.30	0.76	1.02
SC53-390	39	2.52MHZ	0.35	0.68	0.95
SC53-470	47	2.52MHZ	0.43	0.63	0.85
SC53-560	56	2.52MHZ	0.54	0.59	0.78
SC53-680	68	2.52MHZ	0.59	0.53	0.70
SC53-820	82	2.52MHZ	0.72	0.48	0.62
SC53-101	100	1KHZ	0.92	0.45	0.56
SC53-121	120	1KHZ	1.01	0.42	0.52
SC53-151	150	1KHZ	1.3	0.38	0.46
SC53-181	180	1KHZ	1.6	0.35	0.40
SC53-221	220	1KHZ	1.8	0.32	0.38
SC53-271	270	1KHZ	2.4	0.30	0.35
SC53-331	330	1KHZ	3.2	0.28	0.31
SC53-391	390	1KHZ	3.5	0.26	0.29
SC53-471	470	1KHZ	4.2	0.20	0.25
SC53-561	560	1KHZ	4.9	0.19	0.22
SC53-681	680	1KHZ	6.7	0.18	0.20
SC53-821	820	1KHZ	7.8	0.15	0.18
SC53-102	1000	1KHZ	8.8	0.13	0.17

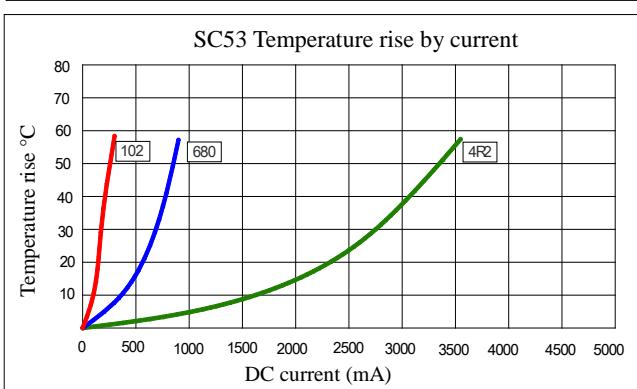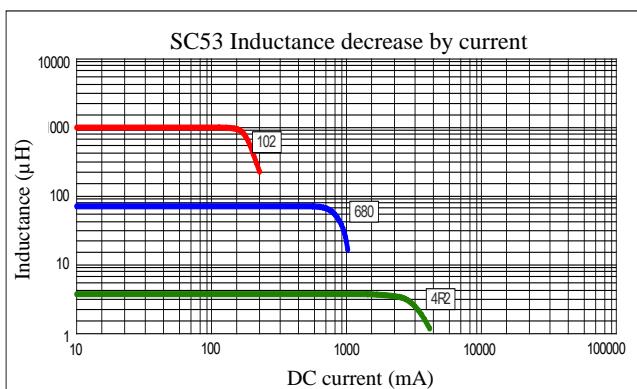

(1). Inductance tolerance ±20% tested at 0.25V, 0ADC and 25°C.

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 10% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

©2011 Signal Transformer –Specification subject to change without notice. 07.11

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Fixed Inductors category:***

***Click to view products by Bel Fuse manufacturer:***

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)  
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)  
[1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)