


# SCRH124

## SMD POWER INDUCTORS

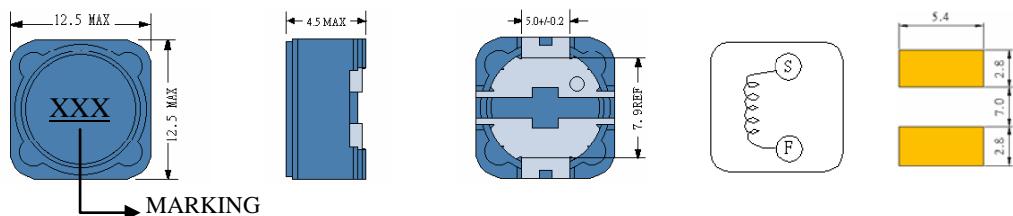



### • Features

1. Magnetically shielded construction
2. Excellent Power Density
3. Engineered to Provide High Efficiency

## CHARACTERISTICS



Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation <sup>(3)</sup> Current (A)	Temperature Current <sup>(4)</sup> (A)
SCRH124-3R9	3.9	100KHZ	15m	6.5	6.0
SCRH124-4R7	4.7	100KHZ	18m	5.7	5.4
SCRH124-6R8	6.8	100KHZ	23m	4.9	4.8
SCRH124-8R2	8.2	100KHZ	26m	4.6	4.4
SCRH124-100	10	100KHZ	28m	4.5	4.1
SCRH124-120	12	100KHZ	38m	4.0	3.9
SCRH124-150	15	100KHZ	50m	3.2	3.5
SCRH124-180	18	100KHZ	57m	3.1	3.1
SCRH124-220	22	100KHZ	66m	2.9	3.0
SCRH124-270	27	100KHZ	80m	2.8	2.7
SCRH124-330	33	100KHZ	97m	2.7	2.43
SCRH124-390	39	100KHZ	132m	2.1	2.07
SCRH124-470	47	100KHZ	160m	1.9	1.87
SCRH124-560	56	100KHZ	190m	1.8	1.77
SCRH124-680	68	100KHZ	220m	1.5	1.60
SCRH124-820	82	100KHZ	260m	1.3	1.44
SCRH124-101	100	100KHZ	308m	1.2	1.36
SCRH124-121	120	100KHZ	380m	1.1	1.23
SCRH124-151	150	100KHZ	530m	0.95	1.16
SCRH124-181	180	100KHZ	620m	0.85	1.05
SCRH124-221	220	100KHZ	700m	0.80	0.95
SCRH124-271	270	100KHZ	870m	0.60	0.86
SCRH124-331	330	100KHZ	990m	0.50	0.78

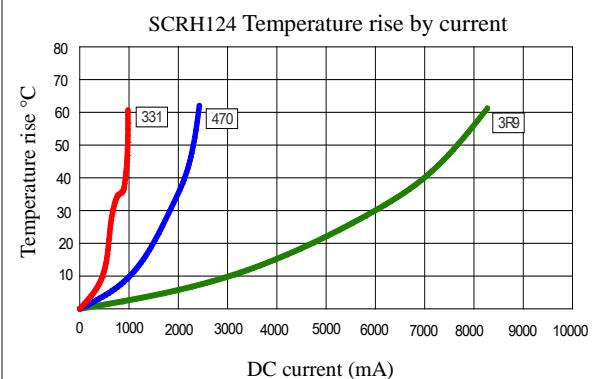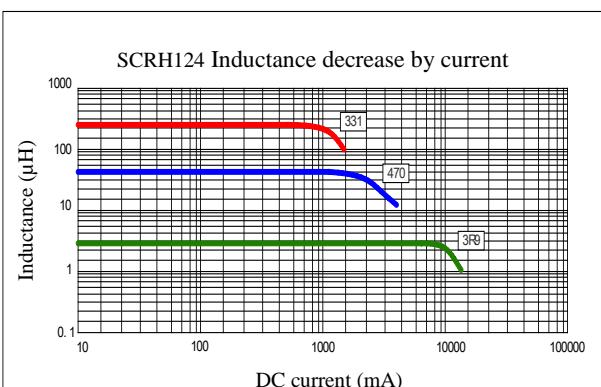

(1). Inductance tolerance for 3.9uH~8.2uH: ±30%, for 10uH~330uH: ±20%. Tested at 0.25V, 0ADC and 25°C

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 25% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Fixed Inductors category:***

***Click to view products by Bel Fuse manufacturer:***

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)  
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)  
[1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)