

# SGP1200-12G

## AC-DC Power Supply

### 12V Output, 1133 Watts



The SGP1200-12G is a 1133 W, power-factor-corrected (PFC) AC-DC front-end which provides a 12 VDC output for datacom, telecom, and other distributed power applications.

The SGP1200-12G meets international safety requirements and is CE marked to the Low Voltage Directive (LVD).

The supply's compact dimensions of 11 x 3.2 x 1.57 inches [279 x 81 x 40 mm] make it ideal for 1U rack mounting. Its internal fan cooling assists providing a normal operating temperature range of -10°C to +50°C.

### Applications

- Data Communications
- Telecommunications
- Distributed Power Systems

### Key Features & Benefits

- Wide input voltage range (90-264 VAC) with PFC
- Active current share
- Incorporates remote sense
- I<sup>2</sup>C interface status monitoring
- Standby voltage of 3.3 VDC @ 4 A
- Overtemperature, overcurrent, overvoltage, and undervoltage protection
- 1U or 2U height configurations
- Status LED provides indicators for input, output, and temperature plus fan status

#### North America

+1-866.513.2839

#### Asia-Pacific

+86.755.29885888

#### Europe, Middle East

+353 61 225 977

tech.support@psbel.com

[belpowersolutions.com](http://belpowersolutions.com)

# SGP1200-12G

## Model Selection

MODEL	NOMINAL OUTPUT VOLTAGE	MAXIMUM OUTPUT CURRENT	REGULATION	RIPPLE & NOISE @ 20 MHz BW
SGP1200-12G	12 VDC	93.3 A	±1 %	100 mV
	3.3 VDC (Standby)	4 A	±2 %	50 mV
SGP1200-12S204G	12 VDC	93.3 A	±1 %	100 mV
	5 VDC (Standby)	2.6 A	±2 %	50 mV

## Input Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
AC Input Voltage	Single-phase continuous input range.	90		264	VAC
Input Frequency	AC input.	47		63	Hz
Hold-up Time	After last AC line peak at full power. At 120 VAC.	12			ms
Input Current	At full-rated load. At 120 VAC			<12	Arms
Inrush Surge Current	Excluding Xcap. Under all conditions.			<30	Apk
Power Factor	Per EN61000-3-2; at 30% or higher load	> 0.95			W/VA

## Output Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency <sup>1</sup>	110 VAC 70%FL	86.5	87.5		%
	110 VAC 100% FL	84.5	85.5		%
	230 VAC 70%FL	89	90		%
	230 VAC 100% FL	87.5	89		%
Minimum Load	Main Output 12 V minimum loading required to maintain regulation.	0.5			A
Output Power				1133	W
Overshoot				<5	%
Transient Response	Load Step of 50% Full load Note: Minimum starting load: 12 V -> 9 A, 3V3 -> 0.2 A			<5	%
Turn-On Delay with PS_ON signal	Time required for initial output voltage stabilization after application of AC input or ON/OFF signal.			<3000	ms
Output Regulation	See Model Selection table above				

## I<sup>2</sup>C Bus Management Interface<sup>2</sup>

PARAMETER	CONDITIONS / DESCRIPTION
I2C Interface	BCA.00009
EEPROM Data	SGP1200-12MM

<sup>1</sup> The fan is considered to be part of the load.

<sup>2</sup> Reference "I<sup>2</sup>C Management Interface" and "EEPROM Table of Contents" documents for SGP1200-12G (consult factory).

# SGP1200-12G

## Interface Signals & Internal Protection<sup>3</sup>

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
TEMP_OK	Signal indicates temperature status. High signal indicates temperature is within range. Changes to a Low signal when PS is overtemperature and V1 output has been turned off.	55	60	65	°C
PS A0, PS A1	I <sup>2</sup> C Addresses.				
SDA	I <sup>2</sup> C Data line (3.3 V).				
SCL	I <sup>2</sup> C Clock line (3.3 V).				
AC_OK/L	Low signal indicates AC input is within PSU limits.				
PS_PRESENT/L	Pin on the PS connector that is tied internally to logic ground. When unit is inserted, line is driven low to indicate a power supply is present.				
FAN_FAIL/L	Low signal indicates any PSU fan is running below 90% of required speed.				
PW_OK	High signal indicates both outputs are within regulation limits.				
Overvoltage Protection	Main Output <15 V; Standby Output < 4.3 V				
Overcurrent Protection	Main Output – Latch off type 105 – 130% of max load; Standby Output Auto-recovery <6 A				
Short-circuit Protection	Main Output - Toff <20 ms; Standby Output – Current Limitation <6 A				

## Safety, Regulatory and EMI Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards: UL/CSA60950-1, IEC60950-1 and EN60950-1. CE Mark for LVD				
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B, EN 55022	Conducted:	CLASS A +3dB margin		
		Radiated:	CLASS A +6dB margin		
Harmonics	Per IEC 61000-3-2.				
Voltage Fluctuation & Flicker	Per IEC 61000-3-3.				
ESD Susceptibility	Per EN 61000-4-2, Part 4., Performance criteria B	Contact Discharge:	+/- 8		kV
		Air Discharge:	+/- 15		
Radiated Susceptibility	Per EN 61000-4-3, Part 3., Performance criteria A			10	V/m
EFT/Burst	Per EN 61000-4-4, Part 4., Performance criteria B			+/- 4	kV
Input Transient Protection	Per EN 61000-4-5, Performance criteria B	Line-to-Line:	+/- 1.6		kV
		Line-to-Ground:	+/- 3		
RF Conducted Disturbances	Per EN 61000-4-6, Level 2., Performance criteria A	150 kHz–80 MHz:		3	V
Voltage Interruptions	Per EN 61000-4-11., Performance criteria A Performance criteria B			12 1	ms sec
Leakage Current	Per EN 60950, 264 VAC @ 60Hz:			<1.6	mA

<sup>3</sup> Refer to product specification for internal pull up impedances and timing of these signals.

# SGP1200-12G

## Environmental Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating.			10000	ASL ft
	Non-Operating.			42000	ASL ft
Operating Temperature	Internal DC fan for cooling. At 100% load:	0		50	°C
Storage Temperature		-40		85	°C
Temperature Coefficient					
Relative Humidity	Non-condensing.@ 40 °C	7		93	%RH
Shock	Operating: half-sine, 11 ms, 10 shock per face, 6 faces			7	G
	Non-Operating: half-sine, 11 ms, 10 shock per face, 6 faces			30	G
Vibration	<b>Operating:</b> Swept Sine, 5-500-5Hz, 1 octave/min, 5 sweep cycles per axis, 3 axes			2	Gpk
	<b>Non-Operating:</b> Swept Sine, 5-500-5Hz, 1 octave/min, 5 sweep cycles per axis, 3 axes			4	Gpk
	Random 0.025G2/Hz, 10-500Hz, 1hr dwell per axis, 3 axes			3.5	Grms
MTBF	Per Telcordia (Bellcore) SR-332 at 45°C	200000			hrs

## LED Indicators

Indicator	LED Color
Standby, 12V OFF	Green Blinking
Operation, 12V ON	Green
Low AC / no AC	LED OFF
Over current on 12V	Amber Blinking
Over voltage (12V OFF)	Amber
Under voltage (12V OFF)	Amber blinking
Over temperature (12V OFF)	Amber
Fan Fault	Amber

## Mechanical Specifications

PARAMETER	CONDITIONS / DESCRIPTION
Dimensions	81.3 x 40 x 337.4 mm
Weight	1.6 kg (3.53 lb)

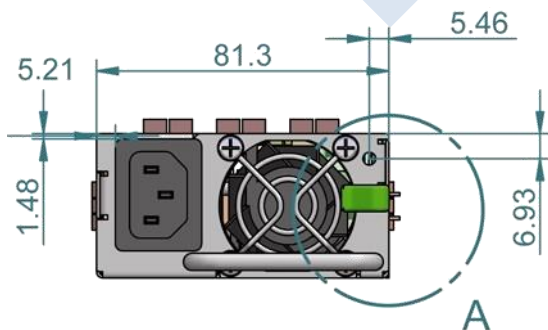


Figure 1 - Front View

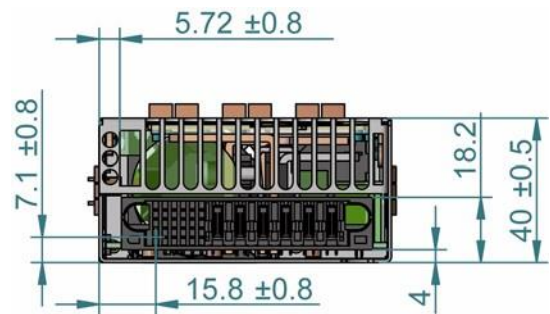


Figure 2 - Rear Connector View

# SGP1200-12G

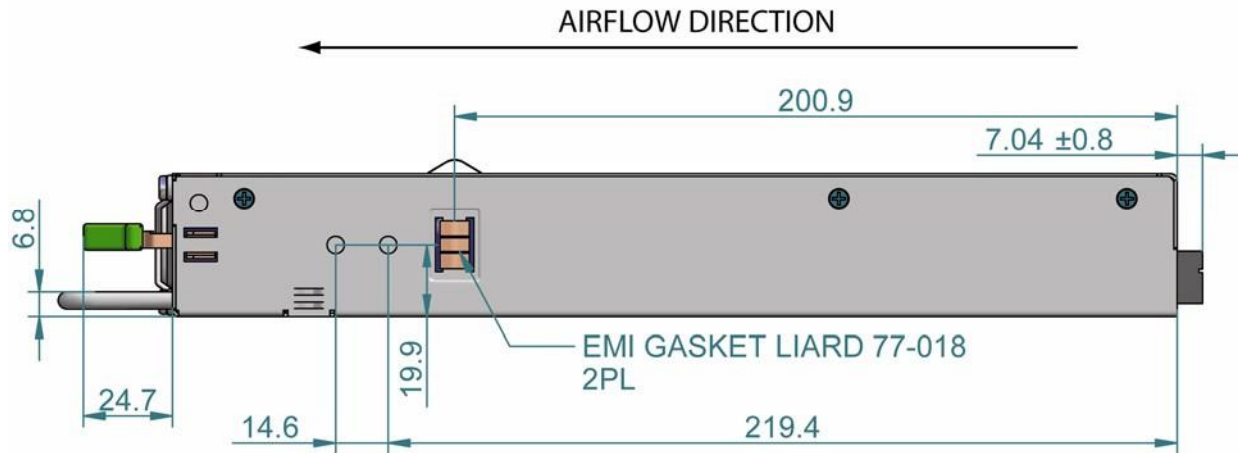


Figure 3 - Side View

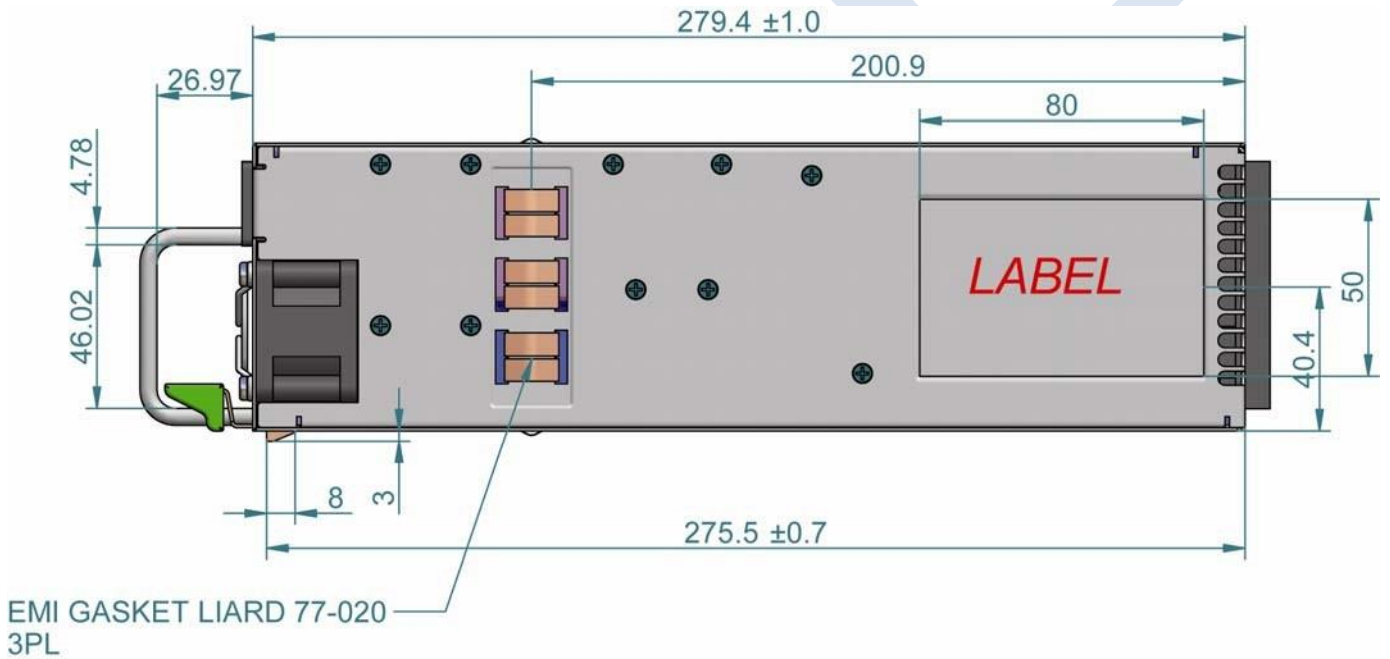


Figure 4 - Top View

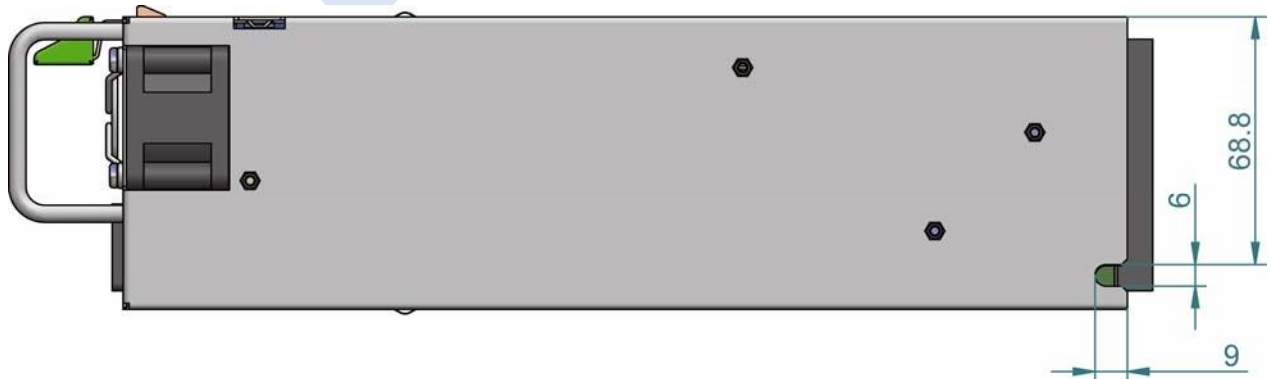


Figure 5 - Bottom View

# SGP1200-12G

## Connector Information

<b>Power Supply:</b>	Input - IEC Connector EN60320 C14 (plug) Output - FCI Power Blade 51721-10002406AA											
<b>Mating Connections:</b>	Input - IEC Connector EN60320 C13 (socket) Output - FCI Power Blade 51741-10002406CC											
<b>Input Connector (AC Power)</b>	<b>Input</b>						<b>Location</b>					
	Input AC plug						Front panel					
<b>Output Connector (Pin &amp; Signal Names)</b> Power Supply connector viewed from the rear of supply	<b>Signal Pins</b>						<b>Power Blades</b>					
	D1	D2	D3	D4	D5	D6						
	C1	C2	C3	C4	C5	C6	PB1	PB2	PB3	PB4	PB5	PB6
	B1	B2	B3	B4	B5	B6						
	A1	A2	A3	A4	A5	A6						

PIN	SIGNAL NAME
PB1	+12V Return
PB2	+12V Return
PB3	+12V Return
PB4	+12V
PB5	+12V
PB6	+12V
A1	PS_ON/L
A2	+12V Sense -
A3	TEMP_OK
A4	PS_PRESENT/L
A5	+3V3 Standby
A6	+3V3 Standby GND
B1	AC_OK/L
B2	+12V Sense +
B3	+12V I_SHARE
B4	PS_KILL
B5	+3V3 Standby
B6	+3V3 Standby GND
C1	SDA
C2	SCL
C3	DC_OK
C4	FAN_FAIL/L
C5	+3V3 Standby
C6	+3V3 Standby GND
D1	PS_A0
D2	PS_A1
D3	S_INT
D4	+3V3 Sense +
D5	+3V3 Standby
D6	+3V3 Standby GND

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rack Mount Power Supplies](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[HFE2500BP](#) [PET1300-12-054NAE](#) [HFE1600BP](#) [73-311-0001](#) [73-317-0148](#) [73-495-0233](#) [750-1016](#) [SFP450-S101G](#) [FUP550SNRPS](#)  
[VRA.00335.0](#) [VRA.00334.0](#) [VRA.00333.0](#) [HFE1600-KIT](#) [CC109146503](#) [RKP-1UI](#) [PFE1100-12-054ND](#) [FND300-1012G](#) [73-951-0001T](#)  
[73-954-0001C](#) [DS550DC-3](#) [DRP-3200-48](#) [RCP-2000-24](#) [TSR10](#) [TET2000-12-086NA](#) [PET2000-12-074RA](#) [RCP-MU](#) [605-10144-2AC](#)  
[6609006-5](#) [D1U54P-W-1200-12-HC4PC](#) [DS450DC-3](#) [DS650DC-3](#) [HPR12K-00-001](#) [LCM1500L-T-4](#) [LCM300Q-T](#) [LCM300W-T-4](#)  
[LCM600N-T-4-A](#) [FNP600-48G](#) [FNR-3-48G](#) [FNR-5-12G](#) [PFS1200-12-054RAH](#) [PFS1200-12-054RD](#) [SPSPFE3-05G](#) [TET3200-12-069RA](#)  
[IEC-A-1](#) [FXX1600PCRPS](#) [915606](#) [DHP-1UT-A](#) [DRP-3200-24](#) [RCP-1000-12](#) [RCP-1000-12-C](#) [RCP-1000-24](#)