

Terminations

Type N - Medium Power Types

DC - 18 GHz - 10 Watt Performance

- DC - 12.4 and DC - 18.0 GHz Model selection
- 10 Watts of Power Handling at 40 °C
- Low VSWR - 50 Ohm - High Performance.
- Rugged Stainless Steel Interface Construction

Midwest Microwave's N Type series of medium power coaxial Terminations provide temperature stable, ruggedly built, precision performance in light weight reasonably sized packages using stainless steel connectors and housings of black anodized finned aluminum for maximum heat dissipation. Input Power levels of 10 Watts is offered with low VSWR performance and units meet all of the stringent environmental test requirements of MIL-E-5400 and MIL-E-16400.



10 Watt DC - 18 GHz Performance

SPECIFICATIONS

Impedance: 50 Ohms

Frequency: DC - 18.0 GHz





VSWR: 1.05 + 0.01 f (GHz)

Power: 10 Watts average @ +25 °C derated linearly to 1.0 Watts @ +125 °C

Peak Power: 1 Kilowatt

Operating Temperature Range: -54 °C to +125 °C

DC - 18.0 GHz	2098 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2098-M0-NNN-07		TRM-2098-MC-NNN-07
Female Jack		Female Jack with Chain
TRM-2098-F0-NNN-07		TRM-2098-FC-NNN-07

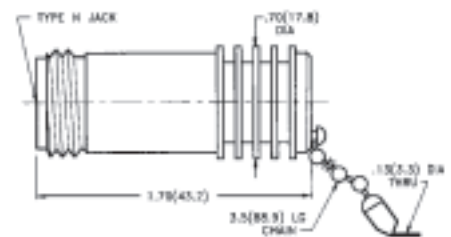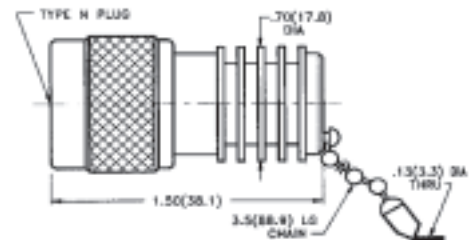

10 Watt DC - 12.4 GHz Performance

SPECIFICATIONS

Frequency: DC - 12.4 GHz

VSWR: 1.05 + 0.01 f (GHz)

Impedance: 50 Ohms

Power: 10 Watts average @ +25 °C derated linearly to 1.0 Watts @ +125 °C

Peak Power: 1 Kilowatt

Operating Temperature Range: -54 °C to +125 °C

DC - 12.4 GHz	2080 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2080-M0-NNN-07		TRM-2080-MC-NNN-07
Female Jack		Female Jack with Chain
TRM-2080-F0-NNN-07		TRM-2080-FC-NNN-07

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Terminators](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[M390303-02N](#) [M39030/3-04S](#) [M39030/3-09S](#) [M39030/3-11N](#) [TNG1-9-78-D3](#) [TNA2-50](#) [TNG1-6-78](#) [TNH1-1-50](#) [R404280000](#) [TNGFL1-1-78](#) [R4042N5000](#) [53S1RR-001N3](#) [142275](#) [56S1RR-001N4](#) [65_BNC-50-0-7/133_NE](#) [71S1RR-001N4](#) [02S17R-001D3](#) [R404240120](#) [R404260000](#) [HT-10-2](#) [FL LCX 50-OHM-RSMA](#) [M39030/3-04N](#) [TNA1-6-50](#) [131-3801-811](#) [TNA1-1-50](#) [65_N-50-0-51/113_NE](#) [65_BNC-50-0-2/133_NE](#) [65_N-50-0-1/133_NE](#) [65002_N-50-1/122_NE](#) [65_MMCX-50-0-31/111_OE](#) [18K15R-0.5E3](#) [2702702](#) [TRM-2161-M0-35M-02](#) [53S17R-001N3](#) [1100.19.0001](#) [6701.01.B](#) [18S24H-40ML5](#) [TRM-2053-M0-NNN-02](#) [R404759000](#) [M39030/6-02N](#) [TRM-2053-MC-NNN-02](#) [M39030/3-03S](#) [SF8012-6009](#) [6701.01.A](#) [65_MCX-50-0-4/111_NE](#) [65_716-50-0-2/003_-E](#) [65_SMB-50-0-1/111_NE](#) [M39030/3-12N](#) [82-5722-RFX](#) [8018-6174](#)