


RoHS COMPLIANT

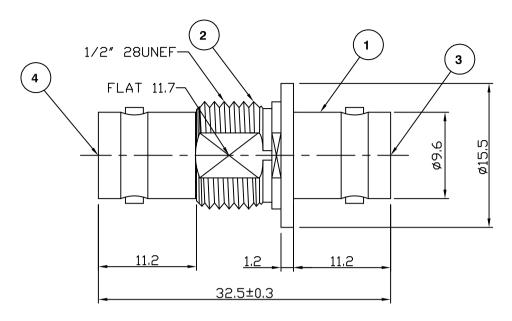

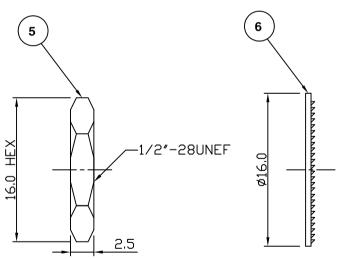



Electrical Characteristics

75 ohms Nominal Impedance: Frequency Range: DC to 1 GHz

Operating Voltage (rms): Dielectric Withstand Voltage (rms): 1500 V maximum at sea level Contact Resistance: 1.5 milliohms maximum Insulation Resistance: 5000 megohms minimum

500 V maximum at sea level

Mechanical Characteristics

500 cycles minimum Mating Cycles: Conform to MIL-C-39012 Interface Dimensions:

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Insulation	ABS
3	Dielectric	Delrin
4	Contact	PB, gold plated
5	Nut	Brass, nickel plated
6	Washer	Steel, nickel plated

Added panel cutout details	JW	3	04 Apr 06
CAD Issue	SN	2	12 Jul 01
First Issue	DW	1	23 May 96
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions 7-13 Russel Way, Widford Industrial Estate, Chelmsford, Essex, CM1 3AA, UK.

Tel: +44 (0) 1245 359515 Fax: +44 (0) 1245 358938

SCALE: Not To Scale	DRAWN BY:	J Williams
DIMENSIONS: mm	CHECKED BY:	M Terry
TOLERANCES: ± 0.2mm unless	APPROVED BY:	A Tusi
otherwise stated	DATE:	04 Apr 06

Isolated BNC Bulkhead Jack to BNC Jack

TITLE:

PART NUMBER:

VBI100-1-75

PAGE: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - In Series category:

Click to view products by Bel Fuse manufacturer:

Other Similar products are found below:

5916-1103-603 5919-1503-000 5919-9503-000 651A505 82-5552 9030-9523-502 PN2C A0407000 R114703000W R125771001

R127871001 R141710000W R141723161 R141730000 R143730700 R143770000 R161703000W R161753000W R161791530W

R201705000 R222705200 R222M40010W R223703180 R316754000 R405006000 R443162000 AD78TL HRM-513S 1996352-2

2157155-1 252169-75 AD158 2101130-1 252186 R114704000W R114720000W R125705001 R125705701 R125771000 R125771001W

R127704001 R127.870.001 R127872001 R141717000 R142710000 R142723000 R143703000 R143704000 R143705700 R143710000