


Safety Relay Series SCR

Description **SCR DI-1/0/1-T**

Article number **6075113141**

Connection

Clamp	Function
A1	+
L+	IO-Link 24 V
C/O	IO-Link CQ
A2	GND
S12	OSSD Input 1
S22	OSSD Input 2
S33	automatic RESET
S34	manual RESET
13	safety circuit 1
23	safety circuit 2
33	safety circuit 3
Y1	external device monitoring
14	safety circuit 1
24	safety circuit 2
34	safety circuit 3
n.c.	n.c.

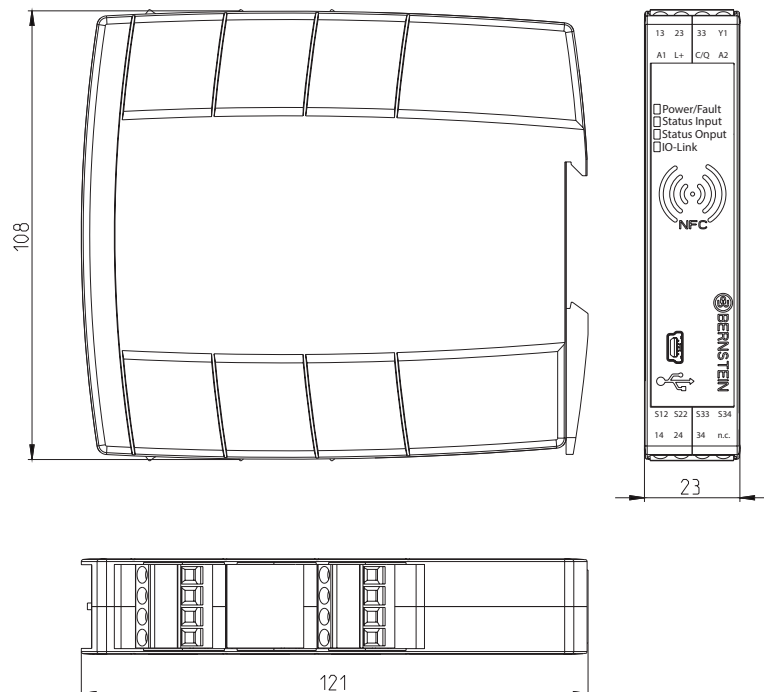

Electrical Data

Rated operating voltage	U_e	24 V DC, Reverse polarity protection, +25 %, - 20 %, PELV / SELV power supply unit
No-load current	I_0	≤ 50 mA
Voltage level		according to Typ 3 EN 61131-2
Time delay before availability	t_v	max. 2 s
Switch-off delay	t_a	<20 ms
Switch-on delay	t_e	<100 ms
Rated impulse withstand voltage	U_{imp}	4 kV
Overvoltage category		II
Short-circuit protection		yes
Electromagnetic interference		according to EN 61326-1, EN 61326-3-1 and EN 61131-9


Output data / relay outputs	
Rated switching capacity	250 V AC, 8 A, AC1, 2000 VA
Utilization category	AC 15: 230 V / 5 A DC 13: 24 V / 5 A
Output function	3 N.O. Series connection of 2 forcibly guided relays
Contact material	AgCuNi +0,2 µm Au

IO – LINK specification	
IO – LINK Spec V 1.1	compliant
Speed	COM 2 38400 baud

Mechanical Data	
Enclosure	PA-GF, black (quick fastener for mounting rail)
Front plate	PBT, yellow
Indication	1 x LED green / red Power / Fault
	1 x LED yellow Status Input
	1 x LED yellow Status Output
	1 x LED green IO-Link
Ambient temperature	0 °C ... +60 °C
Storage temperature	0 °C ... +60 °C
Maximum air humidity	50 % at 40 °C without condensation
Altitude	≤ 2000 m NHN
Connection	screw terminals (0,34-2,5 mm ² / AWG 22-14) Tightening torque 0.5 Nm, stripping length / sleeve length 7 mm
Type of protection	IP20
Degree of pollution	II

Safety data			
Up to PL	e		acc. to EN ISO 13849-1
Category	4		
PFH _b	6,8x10 ⁻⁹ 1/h	Cycle time 600 s	acc. to DIN EN 62061
SIL CL	3	35040 switchings / year	
Service life	20 years		
Stop Category	0		

Standards	
	EN ISO 13849-1
	EN 62061
	EN 60947-5-1
	EN 61326-1, EN 61326-3-1
	EN 61131-9

EU-Conformity	
	according to directive 2006/42/EG (Safety-of-Machinery-Directive)
	according to directive 2011/65/EU (RoHS II)
	according to directive 2014/30/EU (EMV-Richtlinie)
	according to directive 2012/19/EU (EU-WEEE II) 

Approvals	
	TÜV Nord

Notes	
	NFC-interface USB 2.0-interface

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Safety Relays](#) category:

Click to view products by [Bernstein](#) manufacturer:

Other Similar products are found below :

[7-1618103-5](#) [1351-1X](#) [1618082-4](#) [1618111-1](#) [C200HDA003](#) [C200HMR432](#) [C200HMR832](#) [C200HMR833](#) [C28PEDRA](#) [20-050-36X](#)
[C500ETL01](#) [C500OD415CN](#) [2-1618068-0](#) [9-1618103-2](#) [SP10-ETL01](#) [C200HNC112](#) [C200HOD214](#) [C500CN812N](#) [4NK0AQY](#) [1100-42X](#)
[V23050A1012A551](#) [6-1618082-4](#) [7-1618103-6](#) [WTD-101X](#) [SP16DRD](#) [SP16DRA](#) [C500-CE243](#) [C500-IDS02-V1](#) [607.5111.020](#) [DOLD](#)
[48173](#) [CS AR-20V024](#) [CS AR-22V230](#) [750136](#) [777512](#) [PSR-MS21-1NO-1DO-24DC-SC](#) [600PSR-165/300-CU](#) [J73KN-AM-22](#) [SR6V6K18](#)
[SR4M4005](#) [PSR-SCP- 24UC/ESL4/3X1/1X2/B](#) [BPS 36-1](#) [BP34 - 101057553](#) [2TLA010033R3000](#) [2TLA010033R2000](#) [2TLA010033R0000](#)
[2TLA010028R1000](#) [2TLA010017R0100](#) [2TLA010026R0400](#) [2TLA020007R6900](#) [SCR 2-W22-2.5](#)