

BD Series



- Low impedance, high ripple current, high voltage
- Load life of 2000 hours at 105°C
- RoHS Compliant



规格表 Specifications

项目 Items	特性参数 Characteristics	
使用温度范围 Category Temperature Range	-55 ~ +105°C	
额定工作电压范围 Rated Voltage Range	35 ~ 250 V	
静电容量允许偏差 Capacitance tolerance	±20%(M) (at 20°C, 120Hz)	
漏电流 Leakage Current	施加额定工作电压2分钟后读数，小于或等于规格值 (at 20°C) I≤0.15CV 或500μA (取大值) Less than or equal to the specified value. After 2 minutes application of rated Voltage at 20°C	
损耗角正切值 tanδ Dissipation Factor	小于或等于规格 (at 20°C, 120Hz) Less than or equal to the specified	
温度特性 Low Temperature Characteristics (Max.Impedance Ratio)	Z(-25°C)/Z(+20°C)	≤1.25
	Z(-55°C)/Z(+20°C)	≤1.25
耐久性 Endurance	105°C施加额定工作电压2000小时，恢复到20°C后，产品性能应满足以下要求 The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 2000 hours at 105°C.	
	Appearance	No significant damage
	Capacitance change	≅ ±20% of the initial value
	D.F.(tanδ)	≅ 150% of the specified value
	ESR	≅ 150% of the specified value
	Leakage current	≅ The specified value
耐湿负荷特性 Damp Heat (Steady State)	在60°C 温度，湿度90%~95%RH的环境中，施加额定电压1000小时后，恢复到20°C后，产品性能应满足以下要求 The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 1000 hours at 60°C, 90%~ 95% RH.	
	Appearance	No significant damage
	Capacitance change	≅ ±20% of the initial value
	D.F.(tanδ)	≅ 150% of the specified value
	ESR	≅ 150% of the specified value
	Leakage current	≅ The specified value
浪涌电压特性 (Surge Voltage)	浪涌电压: 1、35-100W.V.: 1.15*W.V.(V); 2、160-400W.V.: 1.1*W.V.(V) Surge Voltage: 1、35-100W.V.: 1.15*W.V.(V); 2、160-400W.V.: 1.1*W.V.(V) 在105°C环境中，按充电30秒；放电5分30秒，连续施加浪涌电压1000次(Rc=1kΩ)，待恢复后测试，应满足以下要求 The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor (Rc=1kΩ) and discharge for 5 minutes 30 seconds	
	Appearance	No significant damage
	Capacitance change	≅ ±20% of the initial value
	D.F.(tanδ)	≅ 150% of the specified value
	ESR	≅ 150% of the specified value
	Leakage current	≅ The specified value

外形图 Dimensions (mm)

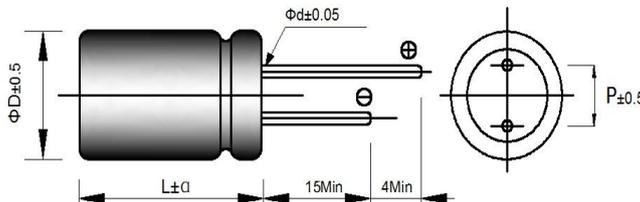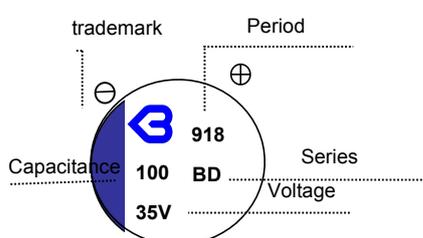

ΦD	5	6.3	8	10
P	2	2.5	3.5	5
Φd	0.5	0.5	0.6	0.6
a	L<16mm±1.0			
	L≧16mm±2.0			

BD Series

◆ 尺寸与最大纹波电流一览表 Standard Ratings

Rated voltage (V)	Rated capacitance(μ F)	Case size Φ D×L(mm)	$\tan\delta$ (120Hz)	ESR($m\Omega$) at 20°C, 100 KHz	Rated ripple current (mA _{RMS} /105°C/100kHz)
35 (1V)	22	6.3*8	0.12	90	720
	33	6.3*8	0.12	65	1150
	47	8*8	0.12	90	1500
	150	8*12	0.12	65	2300
	220	10*12	0.12	50	2900
50 (1H)	22	6.3*8	0.12	68	1800
	47	8*12	0.12	34	2100
	68	10*12	0.12	29	2300
	120	10*12	0.12	28	2800
63 (1J)	22	8*8	0.12	75	1500
	33	8*12	0.12	68	1800
	82	10*12	0.12	45	2500
80 (1K)	10	8*8	0.12	48	1150
	12	8*12	0.12	46	1800
	22	10*12	0.12	41	2100
100 (2A)	15	8*12	0.12	47	1850
	22	10*12	0.12	40	2300
	33	10*12	0.12	40	2500
160 (2C)	10	8*12	0.12	100	1350
	15	10*12	0.12	85	1580
	22	10*12	0.12	80	1850
200 (2D)	8.2	8*12	0.12	110	950
	15	10*12	0.12	110	1350
220 (2P)	6.8	8*12	0.12	110	750
	10	10*12	0.12	110	1050
250 (2E)	3.3	8*12	0.12	486	450
	6.8	10*12	0.12	456	780
	8.2	10*12	0.12	420	950

◆ 纹波电流修正系数 Rated Ripple Current Coefficient

频率 Frequency(Hz)	120Hz≤f<1kHz	1kHz≤f<10kHz	10kHz≤f<100kHz	100kHz≤f<500kHz
系数 Coefficient	0.05	0.30	0.70	1.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminum Organic Polymer Capacitors](#) category:

Click to view products by [BERYL](#) manufacturer:

Other Similar products are found below :

[D38999/20WJ43SN-LC](#) [750-1809](#) [MS27467T25F24P](#) [MS27467T25F24S](#) [MS27467T25F29P](#) [176P12](#) [SEAU0A0102G](#) [BTM-16-513](#)
[MS3470W8-33P L/C](#) [MAL218497702E3](#) [MAL218497801E3](#) [MAL218397005E3](#) [MAL218297003E3](#) [MAL218397603E3](#) [MAL218297802E3](#)
[MAL218497701E3](#) [MAL218697502E3](#) [MAL218397102E3](#) [MAL218297804E3](#) [MAL218497902E3](#) [MAL218497804E3](#) [MAL218297001E3](#)
[MAL218697005E3](#) [MAL218697509E3](#) [MAL218397806E3](#) [MAL218297603E3](#) [MAL218397604E3](#) [MAL218697106E3](#) [MAL218297005E3](#)
[MAL218397106E3](#) [MAL218297103E3](#) [MAL218697108E3](#) [MAL218497903E3](#) [MAL218497703E3](#) [MAL218297701E3](#) [MAL218297101E3](#)
[MAL218397104E3](#) [MAL218397801E3](#) [MAL218297604E3](#) [MAL218397803E3](#) [MAL218697601E3](#) [MAL218697554E3](#) [MAL218697607E3](#)
[MAL218397805E3](#) [MAL218297105E3](#) [MAL218397702E3](#) [MAL218697104E3](#) [MAL218297702E3](#) [MAL218497901E3](#) [MAL218497806E3](#)