



CH Series


- Low impedance, high ripple, high temperature resistant
- Load life of 2000 hours at 125°C
- RoHS Compliant



◆ 规格表 Specifications

项目 Items	特性参数 Characteristics					
使用温度范围 Category Temperature Range	-55 ~ +125°C					
额定工作电压范围 Rated Voltage Range	2.5 ~ 25V					
静电容量允许偏差 Capacitance tolerance	±20%(M) (at 20°C, 120Hz)					
漏电流 Leakage Current	施加额定工作电压2分钟后读数, 小于或等于规格值 (20°C) I ≤ 0.15CV 或 120μA (取大值) (The bigger) After 2 minutes applied for rated voltage at 20°C, less than or equal to the specified value.					
损耗角正切值 tanδ Dissipation Factor	Rated voltage (V)	2.5~4	6.3	10~16	20~25	(at 20°C, 120Hz)
	tanδ (Max.)	0.18	0.15	0.12	0.15	
温度特性 Low Temperature Characteristics (Max.Impedance Ratio)	Z(-25°C)/Z(+20°C)	≤ 1.25				(100KHz)
	Z(-55°C)/Z(+20°C)	≤ 1.25				
耐久性 Endurance	125°C 施加额定工作电压2000小时, 恢复到20°C后, 产品性能应满足以下要求 The specifications listed below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 125°C					
	Appearance	No significant damage				
	Capacitance change	≤ ±20% of the initial value				
	D.F.(tanδ)	≤ 150% of the specified value				
	ESR	≤ 150% of the specified value				
	Leakage current	≤ The specified value				
Damp Heat (Steady State) 耐湿负荷特性	在60°C 温度, 湿度90%~95%RH的环境中, 施加额定电压1000小时后, 恢复到20°C后, 产品性能应满足以下要求 The specifications listed below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90%~ 95% RH.					
	Appearance	No significant damage				
	Capacitance change	≤ ±20% of the initial value				
	D.F.(tanδ)	≤ 150% of the specified value				
	ESR	≤ 150% of the specified value				
	Leakage current	≤ The specified value				
浪涌电压特性 (Surge Voltage)	浪涌电压=额定电压* 1.15(V) Surge Voltage=Rated voltage * 1.15(V) 在125°C环境中, 按充电30秒, 放电5分30秒, 连续施加浪涌电压1000次(Rc=1kΩ), 待恢复后测试, 应满足以下要求 The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 125°C for 30 seconds through a protective resistor (Rc=1kΩ) and discharge for 5 minutes 30 seconds					
	Appearance	No significant damage				
	Capacitance change	≤ ±20% of the initial value				
	D.F.(tanδ)	≤ 150% of the specified value				
	ESR	≤ 150% of the specified value				
	Leakage current	≤ The specified value				

◆ 外形图 Dimensions (mm)

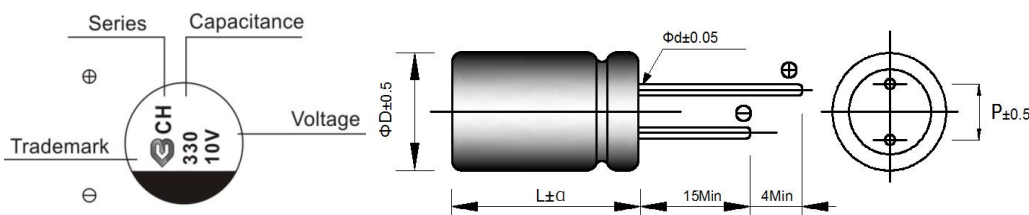

ΦD	5	6.3	8	10
P	2	2.5	3.5	5
Φd	0.5	0.5	0.6	0.6
a	L < 16mm: 1.0			
	L ≥ 16mm: 2.0			

CH Series

◆ 尺寸与最大纹波电流一览表 Standard Ratings

Rated voltage (V)	Rated capacitance(μ F)	Case size Φ D*L(mm)	ESR(m Ω) at 20 $^{\circ}$ C, 100 KHz	Rated ripple current (mArms/105 $^{\circ}$ C\100kHz)	Rated ripple current (mArms/125 $^{\circ}$ C/100kHz)
2.5 (OB)	560	8*12	13	4600	1510
	820	8*12	13	4600	1510
	1200	10*12	13	5400	1700
4 (OG)	560	8*12	13	4600	1510
	820	10*12	13	5400	1700
	1200	10*12	13	5400	1700
6.3 (OJ)	470	8*12	15	4300	1400
	680	8*12	15	4300	1400
	820	10*12	12	5400	1700
7.5 (OP)	500	6.3*8	15	4300	1400
	680	8*8	15	4300	1400
	820	10*12	12	5400	1700
10 (1A)	220	8*12	18	4000	1200
	470	8*12	18	4000	1200
	560	10*12	14	5400	1600
	820	8*12	12	5100	1600
	1500	10*12	12	5100	1600
16 (1C)	180	8*12	18	3500	1100
	220	8*12	18	3500	1100
	330	10*12	16	4600	1510
20 (1D)	100	8*12	24	3500	1100
	150	10*12	20	4300	1400
25 (1E)	22	8*12	65	1200	500
	47	8*12	55	1900	790
	220	8*12	40	2100	1050
	270	10*12	40	2100	1050
	330	10*12	32	2750	1375

◆ 纹波电流修正系数 Rated Ripple Current Coefficient

频率 Frequency(Hz)	120Hz \leq f<1kHz	1kHz \leq f<10kHz	10kHz \leq f<100kHz	100kHz \leq f<500kHz
系数 Coefficient	0.05	0.30	0.70	1.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [BERYL](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [1814181](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#)
[UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-](#)
[A1CF471](#) [EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)
[TER330M50GM](#) [477KXM035MGBWSA](#)