

KS Series

Features

- Snap-in, general purpose, long life
- Endurance with ripple current: 105°C 3000 hours
- High ripple current capability
- Safety vent designed on aluminum case
- RoHS2.0 Compliant

Applications


- Professional power supply
- Inverter
- UPS
- Air conditioner, general purpose inverter
- Professional arena power amplifier
- Frequency converters
- Medical power supply
- And others

规格表 Specifications


项目 Items	特性参数 Characteristics		
使用温度范围 Category Temperature Range	-25 ~ +105°C		
额定工作电压范围 Rated Voltage Range	160 ~ 450V.DC		
电容量允许偏差 Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)		
漏电流 Leakage Current	$I = 3\sqrt{CV}$ 施加额定工作电压5分钟 After 5 minutes application of rated voltage. Note: I= Max. leakage current (µA), C = Nominal capacitance (µF), V = Rated voltage (V) (at 20°C)		
损耗角正切值 tanδ Dissipation Factor	Rated voltage(V)	160 ~ 400	420 ~ 450
	tanδ (Max.)	0.15	0.20
标称容量超过1000µF, 则每增加1000µF, 损耗角正切值增加0.02 When nominal capacitance exceeds 1000µF, add 0.02 to the value above for each 1000µF increase. (at 20°C, 120Hz)			
低温特性 Low Temperature Characteristics (Max. Impedance Ratio)	阻抗比值不得超过下表中列出的值 The impedance ratio shall not exceed the values listed in the below table		
	Rated voltage(V)	160 ~ 400	420 ~ 450
	Z(-25°C)/Z(+20°C)	4	8
(at 120Hz)			
耐久性 Endurance	在105°C环境中, 不超过额定电压的范围内叠加最大允许纹波电流, 连续3000小时, 经恢复到20°C后, 电容器满足以下各项要求。 The following specifications shall be satisfied when the capacitors are restored to 20°C after applied within maximum allowable ripple current and not over rated voltage range for 3000 hours at 105°C.		
	Capacitance change	≅ ±20% of the initial value	
	D.F.(tanδ)	≅ 200% of the initial specified value	
	Leakage current	≅ The initial specified value	
高温储存特性 Shelf Life	在105°C环境中, 不施加电压条件下储存1000小时, 经恢复到20°C后, 电容器满足以下各项要求。 The following specifications shall be satisfied when the capacitors are restored at 20°C after exposing them for 1000 hours at 105°C without voltage applied.		
	Capacitance change	≅ ±15% of the initial value	
	D.F.(tanδ)	≅ 150% of the initial specified value	
	Leakage current	≅ 200% of the initial specified value	

尺寸图 (单位: mm) DIMENSIONS (Unit:mm)

● Standard Terminal Type : S (Φ22 ~ Φ35)

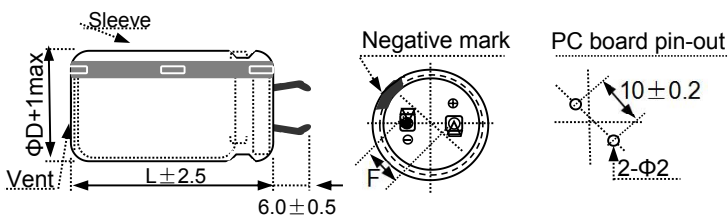

● Terminal Type : P (Φ35)

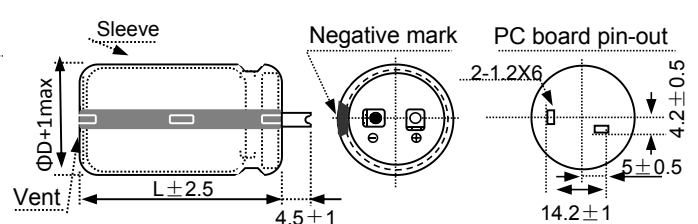

纹波电流修正系数 Rated Ripple Current Coefficient

● 频率系数 Frequency Coefficient

Frequency (Hz)	50	120	300	1k	10k	50k
160 ~ 250V	0.81	1.00	1.17	1.32	1.45	1.50
315 ~ 450V	0.77	1.00	1.16	1.30	1.41	1.43

KS Series

◆ 标准品一览表 Standard Ratings

Cap.(μF) \ WV(V)	160(2C)				180(2Z)					200(2D)			
390					22×25 1.37					22×25 1.37			
470	22×25 1.50									22×30 1.57	22×35 1.68		
560					22×30 1.71	25×25 1.70				22×35 1.75	25×25 1.70		
680	22×30 1.89	25×25 1.87			22×35 1.93					22×40 1.97	25×30 1.92		
820	22×35 2.12	25×30 2.11			22×40 2.16	25×35 2.11	30×25 2.29			22×45 2.20	25×35 2.20	30×25 2.29	
1,000	22×40 2.38	22×45 2.43	25×35 2.43		22×45 2.43	22×50 2.48	25×35 2.43	25×40 2.48	30×30 2.55	22×50 2.48	25×40 2.48	30×30 2.55	35×25 2.69
1,200	22×50 2.72	25×40 2.71	30×30 2.80	35×25 2.94		25×45 2.80	30×35 2.86	35×25 2.94		25×45 2.80	25×50 2.81	30×35 2.86	35×30 2.99
1,500		25×45 3.08	30×35 3.20			25×40 3.13	30×40 3.29	35×30 3.37		30×40 2.29	35×35 3.39		
1,800		25×50 3.43	30×40 3.60	35×30 3.65				30×45 3.69	35×35 3.71		30×45 3.69	30×45 3.75	35×40 3.84
2,200			30×45 4.08	35×35 4.10				30×50 4.14	35×40 4.25				35×40 4.35
2,700		30×50 4.59	35×40 4.70	35×40 4.81				35×45 4.81	35×50 4.91				35×50 4.91
3,300				35×50 5.43									

Cap.(μF) \ WV(V)	250(2E)				315(2F)					400(2G)			
120										22×25 0.80			
150										22×30 0.93			
180					22×25 0.98					22×35 1.05	25×25 1.02		
220					22×30 1.13	25×25 1.13				22×40 1.18	25×30 1.16		
270	22×25 1.14				22×35 1.27					22×45 1.32	25×35 1.33	30×30 1.32	
330	22×30 1.32				22×40 1.43	25×30 1.41	30×25 1.47			22×50 1.50	25×40 1.50	30×30 1.48	35×25 1.55
390	22×35 1.47	25×25 1.43			22×45 1.59	22×50 1.62	25×35 1.60				25×45 1.66	25×50 1.69	30×35 1.64
470	22×40 1.64	25×30 1.60				25×40 1.79	30×30 1.76	35×25 1.85				30×40 1.85	35×30 1.88
560	22×45 1.82	25×35 1.82	30×25 1.90			25×45 1.99	25×50 2.02	30×35 1.96	35×30 2.05		30×45 2.07	30×50 2.15	35×35 2.08
680	22×50 2.05	25×40 2.05	30×30 2.11	35×25 2.22				30×40 2.22	35×35 2.29			35×40 2.37	35×45 2.43
820			25×45 2.29	30×35 2.37			30×45 2.50	30×50 2.54	35×40 2.60				35×50 2.72
1,000		25×50 2.56	30×40 2.69	35×30 2.73					35×45 2.94				
1,200		30×45 3.02	30×50 3.07	35×35 3.03					35×50 3.28				
1,500			35×40 3.51	35×45 3.59	← Case size: ΦD×L(mm) ← 外壳尺寸: 直径X长度(毫米) ← Maximum allowable ripple current at 105°C/120Hz(A.r.m.s) 在105°C/120Hz下的最大允许纹波电流(有效值,单位:安)								
1,800				35×50 4.01									

※铝电解电容器由于在纹波电流叠加时自我发热、温度上升而老化，中心温度每升温5℃寿命减少一半。要想保持长寿命请在使用过程中降低纹波电流。
 The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

KS Series

◆ 标准品一览表 Standard Ratings

wv(V) Cap.(μF)	420(W6)				450(2W)								
	82					22×25 0.67							
100	22×25 0.73												
120	22×30 0.84	25×25 0.84			22×30 0.84	22×30 0.87	25×25 0.84						
150	22×35 0.97				22×40 0.97	25×30 0.97							
180	22×40 0.97	22×50 1.07	25×35 1.05	30×25 1.09	22×45 1.09	25×35 1.09	30×25 1.09						
220	22×45 1.20	22×50 1.23	25×35 1.21	30×30 1.21	22×50 1.23	25×40 1.23	30×30 1.21	35×25 1.27					
270		25×40 1.36	25×45 1.39	35×25 1.41	25×45 1.39	25×50 1.41	30×35 1.37	35×30 1.43					
330	25×50 1.55	30×35 1.51	30×40 1.55	35×30 1.58			30×40 1.55		35×35 1.74				
390			30×45 1.73	35×35 1.74			30×45 1.73	30×50 1.76	35×45 2.02				
470			30×50 1.93	35×40 1.98				35×40 1.98	35×50 2.25				
560				35×45 2.20	← Case size: ΦD×L(mm) ← 外壳尺寸: 直径X长度 (毫米)								
680				35×50 2.48	← Maximum allowable ripple current at 105°C/120Hz(A.r.m.s) ← 在105°C/120Hz下的最大允许纹波电流 (有效值, 单位: 安)								

※铝电解电容器由于在纹波电流叠加时自我发热、温度上升而老化，中心温度每升温5℃寿命减少一半。要想保持长寿命请在使用过程中降低纹波电流。

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Snap In](#) category:

Click to view products by [BERYL](#) manufacturer:

Other Similar products are found below :

[NRLF103M25V35X20F](#) [EET-XB2W221LA](#) [LGQ2C681MELEDE](#) [108LMB200M2ED](#) [B41231C4229M](#) [LGM2W181MELA25](#) [MVK-25VC33-M-6.3*5](#) [ALC40F1012DH](#) [ALC40E1004EL](#) [LGZ2W151MELB40](#) [LGZ2W271MELC45](#) [LGZ2W221MELC40](#) [LGZ2W151MELC30](#) [LGZ2W121MELC25](#) [ALA8DA561EF500](#) [DCMC142T250AB2A](#) [ESMH630VSN123MA45U](#) [ESMH630VRT183MB50U](#) [E81D251VNN331MQ35U](#) [ELXS451VNN820MP25S](#) [ESMM181VSN402QA70U](#) [ELXG160VNN562MP25S](#) [ELXG160VSN562MP25S](#) [ESMH160VNN104MA80U](#) [450MXG82MEFCSN22X25](#) [EKMW421VSN391MQ45S](#) [KN821M25035*30C](#) [152EC0351](#) [152EC0343](#) [152EC0354](#) [TLS450V220M35*25](#) [KS200M821SI225*35TA-1B1ET](#) [KM450M101SI222*30TA-1A3ET](#) [400MXC220MEFCSN35X25](#) [TDA63V4700M22*50 V](#) [HP221M450N350AP4](#) [152EC0329](#) [LAO-50V103MS45PX#B](#) [152EC0566](#) [KN331M45035*30A](#) [KN821M45035*56P4](#) [450USC330MEFCSN25X50](#) [152EC0327](#) [HP471M250N300AP4](#) [TLS500V100M25.4*30 V](#) [KN331M40030*30A](#) [TLS315VS470M30*30 VS](#) [KM250M471SI225*35TA-1B3Et](#) [KS400M151SI222*30TA-1A1ET](#) [152EC0337](#)