

RG Series


- Very low impedance and long life
- Endurance with ripple current: 4,000 to 10,000 hours at 105°C
- RoHS Compliant



■ 规格表 SPECIFICATIONS

项目 Items	特性参数 Characteristics																		
使用温度范围 Category Temperature Range	-55~+105°C																		
额定工作电压范围 Rated Voltage Range	6.3~100V																		
静电容量允许偏差 Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)																		
漏电流 Leakage Current	I ≤ 0.01CV or 3μA, which is greater after application of rated Voltage for 2 minutes. 施加额定工作电压2分钟后读数,二者取大值 I:漏电流 (μA)、C: 静电容量 (μF)、额定电压 (V)																		
损耗角正切值tan δ Dissipation Factor	Rated voltage(V)	6.3	10	16	25	35	50	63	80	100									
	tan δ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08									
	(at 20°C, 120Hz)																		
	标称容量超过1000μF,则每增加1000μF,损耗角正切值增加0.02 When nominal capacitance exceeds 1000 μ F, add 0.02 to the value above for each 1000 μ F increase.(at 20°C, 120Hz)																		
低温特性 Low temperature Characteristics (Max.Impedance Ratio)	电容器低温的阻抗比值, 不应超过下表所列出的值 Impedance ratio values must not exceed values listed in below table.																		
	Rated voltage(V)	6.3	10	16	25	35	50	80	100										
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2										
	Z(-55°C)/Z(+20°C)	8	6	4	3	3	3	3	3	(at 120Hz)									
耐久性 Endurance	施加额定工作电压和额定纹波电流经下表规定时间, 恢复到20°C后, 产品性能应满足以下要求 The following specifications shall be satisfied when the capacitors are restored to 20°C after application of rated voltage with rated ripple current for the specified period of time.																		
	Time	6.3 ~ 10V	Φ5: 4:4000hours Φ8: 6:6000hours Φ10: 10:8000hours																
		16 ~ 100V	Φ5: 6:6000hours Φ8: 10:7000hours Φ10: 13:10000hours																
	Capacitance change	$\leq \pm 25\%$ of the initial value																	
	D.F. (tan δ)	$\leq 200\%$ of the specified value																	
	Leakage current	\leq The specified value																	
高温储存特性 Shelf Life	105°C 放置1000小时, 恢复到20°C后, 产品性能应满足以下要求 The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.																		
	Capacitance change	$\leq \pm 25\%$ of the initial value																	
	D.F. (tan δ)	$\leq 200\%$ of the specified value																	
	Leakage current	\leq The specified value																	

■ 外形图 DIMENSIONS (mm)

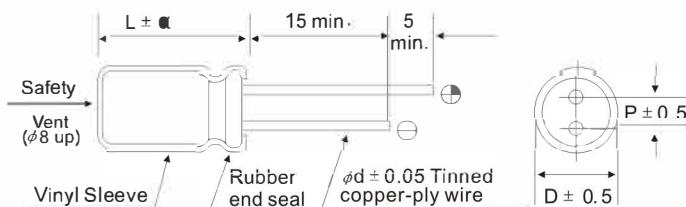

ΦD	5	6.3	8	10	13	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.5	0.6	0.6	0.8	0.8

(L<20)	1.5
(L≥20)	2.0

■ 纹波电流补正系数 RATED RIPPLE CURRENT COEFFICIENT

- 频率系数 Frequency Coefficient

Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
22 ~ 180		0.40	0.75	0.90	1.00
220 ~ 560		0.50	0.85	0.94	1.00
680 ~ 1,800		0.60	0.87	0.95	1.00
2,200 ~ 3,900		0.75	0.90	0.95	1.00
4,700 ~ 18000		0.85	0.95	0.98	1.00

RG Series

RG Series

■ 尺寸与最大纹波电流一览表 STANDARD RATINGS

W V(V) Case size ΦD×L (mm)	6.3(0J)				10(1V)				16(1C)			
	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
5×11	150	0.58	2.3	212	100	0.58	2.3	212	56	0.58	2.3	212
6.3×11	330	0.22	0.87	345	220	0.22	0.87	245	120	0.22	0.87	345
8×12	680	0.13	0.52	644	470	0.13	0.52	644	330	0.13	0.52	644
8×16	1,000	0.087	0.35	846	680	0.087	0.35	846	470	0.087	0.35	846
8×20	1,200	0.069	0.27	1,054	1,000	0.069	0.27	1,054	680	0.069	0.27	1054
10×13	820	0.08	0.32	868	680	0.08	0.32	868	470	0.08	0.32	868
10×16	1,200	0.06	0.24	1,215	1,000	0.06	0.24	1,215	680	0.06	0.24	1215
10×20	1,500	0.046	0.18	1,406	1,200	0.046	0.18	1,406	1,000	0.046	0.18	1406
10×25	2,200	0.042	0.17	1,658	1,500	0.042	0.17	1,658	1,200	0.042	0.17	1658
10×30	2,700	0.031	0.12	1,908	2,200	0.031	0.12	1,916	1,500	0.031	0.12	1908
13×15	1,800	0.049	0.16	1,459	1,500	0.049	0.16	1,459	1,000	0.049	0.16	1450
13×20	3,300	0.035	0.12	1,946	2,200	0.035	0.12	1,908	1,500	0.035	0.12	1916
13×25	3,900	0.027	0.089	2,235	3,300	0.027	0.089	2,235	2,200	0.027	0.089	2235
13×30	4,700	0.024	0.078	2,654	3,900	0.024	0.078	2,654	2,700	0.024	0.078	2534
13×35	5,600	0.02	0.065	2,887	4,700	0.02	0.065	2,887	3,300	0.02	0.065	2887
13×40	6,800	0.017	0.056	3,354	5,600	0.017	0.056	3,354	3,900	0.017	0.056	3354
16×15	2,700	0.042	0.12	1,916	2,200	0.042	0.12	1,946	1,500	0.042	0.12	1946
16×21	5,600	0.027	0.078	2,534	3,900	0.027	0.078	2,534	2,700	0.027	0.078	2354
16×26	6,800	0.021	0.06	2,938	5,600	0.021	0.06	2,938	3,900	0.021	0.06	2938
16×32	8,200	0.017	0.05	3,458	6,800	0.017	0.05	3,146	4,700	0.017	0.05	3146
16×36	10,000	0.015	0.044	3,618	8,200	0.015	0.044	3,618	5,600	0.015	0.044	3618
16×40	12,000	0.013	0.038	4,178	10,000	0.013	0.038	4,085	6,800	0.013	0.038	4085
18×15	3,900	0.043	0.11	2,216	2,700	0.043	0.11	2,216	2,200	0.043	0.11	2216
18×21	6,800	0.026	0.067	2,867	5,600	0.026	0.067	2,867	3,900	0.026	0.067	2867
18×26	10,000	0.019	0.049	3,146	6,800	0.019	0.049	3,458	4,700	0.019	0.049	3458
18×32	12,000	0.015	0.04	4,082	8,200	0.015	0.04	4,178	5,600	0.015	0.04	4178
18×36	15,000	0.014	0.038	4,225	10,000	0.014	0.038	4,225	8,200	0.014	0.038	4225
18×40	18,000	0.012	0.032	4,287	12,000	0.012	0.032	4,287	10,000	0.012	0.032	4287

W V(V) Case size ΦD×L (mm)	25(1E)				35(1V)				50(1H)			
	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA r ms) (at 105°C 100kHz)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
5×11									0.47	5.50	22.00	19
5×11									1	4.00	16.00	35
5×11									2.2	2.50	10.00	46
5×11					4.7	2.8	11.2	48	3.3	2.20	8.80	54
5×11					6.8	2.5	10	55	4.7	1.90	7.60	89
5×11					10	2.0	8	72	10	1.50	6.00	104
5×11	47	0.58	2.3	212	33	0.58	2.3	212	22	0.70	2.80	185
6.3×11	100	0.22	0.87	348	56	0.22	0.87	348	56	0.30	1.20	298
8×12	220	0.13	0.52	648	150	0.13	0.52	648	100	0.17	0.68	557
8×15	330	0.087	0.35	847	220	0.087	0.35	847	120	0.12	0.48	734
8×20	470	0.069	0.27	1,054	270	0.069	0.27	1,054	100	0.28	0.48	823
8×30									220	0.22	0.25	1,056
8×35									330	0.22	0.17	1,444
10×13	330	0.08	0.32	868	220	0.08	0.32	868	150	0.12	0.48	764
10×16	470	0.06	0.24	1,214	330	0.06	0.24	1,214	220	0.08	0.34	1,056
10×20	680	0.046	0.18	1,405	470	0.046	0.18	1,405	270	0.06	0.24	1,224
10×25	820	0.042	0.17	1,654	560	0.042	0.18	1,654	330	0.06	0.22	1,444
10×30	1,000	0.03	0.1	1918	680	0.03	0.1	1918	470	0.05	0.17	1666
13×15	680	0.049	0.16	1458	470	0.049	0.16	1458	270	0.06	0.20	1264
13×20	1,000	0.035	0.12	1904	680	0.035	0.12	1904	470	0.05	0.15	1,694
13×25	1,500	0.027	0.089	2239	1000	0.027	0.089	2239	560	0.03	0.11	1,956
13×30	1,800	0.024	0.078	2,654	1,200	0.024	0.078	2,654	680	0.03	0.10	2,315
13×35	2,200	0.02	0.065	2,889	1,500	0.02	0.065	2,889	820	0.03	0.08	2,516
13×40	2,700	0.017	0.056	3,354	1,800	0.017	0.056	3,354	1,000	0.02	0.07	2,928
16×15	1,000	0.042	0.12	1,948	680	0.042	0.12	1,948	470	0.06	0.17	1698
16×21	1,800	0.027	0.078	2,536	1,200	0.027	0.078	2,536	820	0.03	0.10	2,215
16×25	2,700	0.021	0.06	2,934	1,800	0.021	0.06	2,934	1,000	0.03	0.08	2,556
16×32	3,300	0.017	0.05	3,456	2,200	0.017	0.05	3,145	1,200	0.02	0.07	3,015
16×36	3,900	0.015	0.044	3,614	2,700	0.015	0.044	3,614	1,500	0.02	0.06	3,156
16×40	4,700	0.013	0.038	4,089	3,300	0.013	0.038	4,089	1,800	0.02	0.05	3,715
18×15	1,200	0.043	0.11	2,215	1,000	0.043	0.11	2,215	560	0.05	0.15	1,935
18×21	2,200	0.026	0.067	2,868	1,800	0.026	0.067	2,868	1,000	0.04	0.10	2,495
18×26	3,300	0.019	0.049	3,145	2,200	0.019	0.049	3,456	1,500	0.04	0.07	2,746
18×32	3,900	0.015	0.04	4,178	2,700	0.015	0.04	4,178	1,800	0.03	0.06	3,654
18×36	4,700	0.014	0.038	4,225	3,300	0.014	0.038	4,225	2,200	0.03	0.05	3,689
18×40	5,600	0.012	0.032	4,289	3,900	0.012	0.032	4,289	2,700	0.03	0.04	3,806

RG Series

■ 尺寸与最大纹波电流一览表 STANDARD RATINGS

WV(V) Case size ΦD×L (mm)	63(1J)				80(1K)				100(2A)			
	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA/ ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA/ ms) (at 105°C 100kHz)	Capaci- tance (μ F)	Impedance (Ω max.)100kHz		Rated ripple current (mA/ ms) (at 105°C 100kHz)
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
5×11	15	0.98	6.0	180	10	1.80	6.6	145	6.8	2.0	8.0	92
6.3×11	33	0.85	1.6	312	33	0.57	2.3	243	10	3.5	6	207
8×12	56	0.42	0.98	496	56	0.36	1.4	427	22	2.8	5.2	268
8×16	82	0.32	0.94	658	68	0.25	1	525	39	0.25	5.1	357
8×20	150	0.26	0.68	930	100	0.21	0.85	680	56	0.35	4.3	568
10×13	82	0.21	0.75	630	82	0.25	0.96	624	47	0.2	3.4	488
10×16	120	0.15	0.58	765	100	0.21	0.87	685	68	0.15	3.2	609
10×20	220	0.096	0.38	1100	120	0.19	0.73	780	82	0.1	2.7	780
10×25	270	0.081	0.31	1350	150	0.12	0.52	905	100	0.82	2.5	975
10×30	180	0.11	0.42	965	180	0.13	0.43	975	100	0.75	2.13	1,012
10×60									820	0.05	0.11	2,907
13×20	330	0.08	0.31	1135	220	0.11	0.47	1,102	150	0.08	1.95	1,103
13×25	470	0.051	0.2	1630	330	0.06	0.23	1,520	220	0.05	1.56	954
13×30	560	0.038	0.14	2000	390	0.051	0.21	1,650	270	0.043	1.34	1,506
13×35	680	0.033	0.11	2340	470	0.043	0.17	1,807	330	0.04	1.1	1,856
13×40	820	0.027	0.09	2700	560	0.036	0.15	1,800	390	0.04	0.95	1,908
16×21	470	0.052	0.21	1570	330	0.058	0.21	1,650	220	0.05	1.73	1,254
16×25	680	0.045	0.15	2010	470	0.055	0.19	1,709	330	0.045	1.21	1,603
16×32	820	0.032	0.096	2110	680	0.033	0.12	1,950	470	0.033	1.025	2,156
16×35	1,000	0.028	0.093	2305	820	0.029	0.1	2,100	560	0.029	0.95	2,204
16×40	1,200	0.024	0.088	2500	1,000	0.027	0.09	2,205	680	0.027	0.72	2,306
18×21	680	0.045	0.16	2107	470	0.068	0.26	1,640	330	0.045	0.98	1,509
18×25	1,000	0.034	0.12	2200	680	0.054	0.21	2,100	470	0.038	0.73	2,204
18×32	1,200	0.029	0.09	2560	820	0.042	0.14	2,200	560	0.031	0.7	2,307
18×36	1,500	0.025	0.083	2620	1,000	0.027	0.084	2,560	680	0.027	0.62	2,602
18×40	1,800	0.022	0.074	2710	1,200	0.026	0.077	2,508	820	0.026	0.53	2,909

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by BERYL manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKGMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKGMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)