



# BIAS 6 Watt LED Drivers

## Universal Input/Output with AOVC™

BPWXL 6-9U-070 (700mA constant current)

BPWXLD 6-9U-070 (700mA, 0-10 dimmable)

BPWXL 6-21U-035 (350mA constant current)

BPWXLD 6-21U-035 (350mA, 0-10 dimmable)



### Benefits

- Bias Adaptive Output Voltage Control, AOVC™ technology (patent pending) provides the broadest range of applications with the fewest driver SKUs and 75%+ efficiency across all string lengths
- Highly reliable, rugged construction for indoor or outdoor applications
- True 0-10 volt dimming with 1000:1 range, IEC 60929 compatible
- 1% current regulation and no flicker
- Color coded flying leads for simple assembly and installation
- AC line or DC load switching without overshoot on startup

### Features

- Universal Input (100-308 VAC, 50/60Hz)
- Universal Output with AOVC™ (3-21VDC@350mA), (3-9VDC@700mA)
- Ingress protection to IP67
- -40 to +85°C ambient, 90°C maximum case temperature
- Flying Leads for AC and LED connections
- 3000 VAC Isolation
- 75% efficiency
- EN 55022, Class B; FCC Part 15, Class B
- Meets UL/CSA and EN Product Safety Requirements (UL 8750 Class 2)
- Overcurrent, short circuit (shorted string), open circuit (string break) and overload protected

### Operating Specifications

(@120VAC / 60 Hz / 25°C unless otherwise specified)

Electrical	
Input Voltage Range	100-308 VAC (50/60Hz)
Output Power (Pmax)	6 W nom (50/60Hz)
String Voltage (Minimum)	3.0 VDC
Efficiency	75% nom.
Temperature Regulation Io (Peak)	+/- 2%, Po < Pmax
Isolation	3000 VAC (meets UL/CSA & EN Product Safety)
Earth Leakage @ 120 VAC	< 10 uA
Short Circuit Protection	Continuous, Pin ≤ 0.7 w @ 120 VAC
Reliability @ 25° C, MIL HDBK-217F	> 500 Khr MTBF
0-10 VDC Dimming	Per IEC 60929, Annex E
Line Regulation, Io (Peak)	+/- 1%, Po < Pmax
AC Input Connections	Line BLK, Neutral WHT
DC Output Connections	Pos(+) RED, Neg (-) BLU
Dimming (0-10 VDC) Connections	Adjust PUR/Com GRY

Environmental	
Operating Temperature	-40 to 85° C
Case Temperature, maximum	90° C
Storage Temperature	-40 to 105° C
Ingress Protection	IP67
Mechanical	
Package Size (L x W x H)	1.9 x 1.74 x 0.94 inches
Lead Length	11", 18AWG 600V class
Safety and Standards	
Safety Compliance	UL: 60950-1, 2nd Ed./CSAC22.2 60950-1-07 2nd Ed. ETL: UL 8750 Class 2/CAN/CSA c22.2 (1)
EMI Emissions	EN 55022, Class B, FCC Part 15, Class B
Standards Compliance	IEC61347-1, IEC61347-2-3

Model Number	Maximum String Voltage	Output Current	Dimming
BPWXL 6-9U-070	9 VDC	700 mA	N/A
BPWXLD 6-9U-070	9 VDC	0 - 700 mA	0 - 10 VDC, Vd
BPWXL 6-21U-035	21 VDC	350 mA	N/A
BPWXLD 6-21U-035	21 VDC	0 - 350 mA	0 - 10 VDC, Vd



5 Year Limited Warranty - see Bias Power published warranty for specifics



www.biaspower.com

BPWXL(D) 6 Series Data Sheet, Page 1 of 2

Revised 11/02/2013

Specifications subject to change



# BIAS 6 Watt LED Drivers

Universal Input/Output with AOVC™


BPWXL 6-9U-070 (700mA constant current)

BPWXL 6-9U-070 (700mA, 0-10 dimmable)


BPWXL 6-21U-035 (350mA constant current)

BPWXL 6-21U-035 (350mA, 0-10 dimmable)

## Non-Dimming (BPWXL)

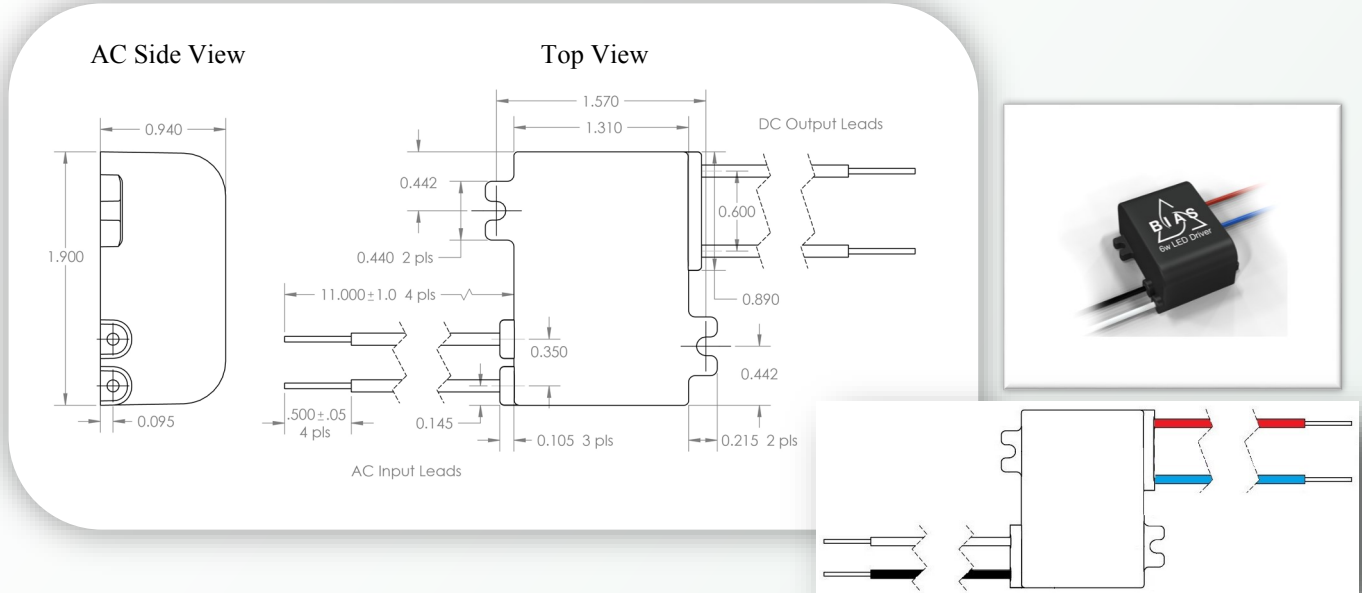

## Dimming (BPWXL D)

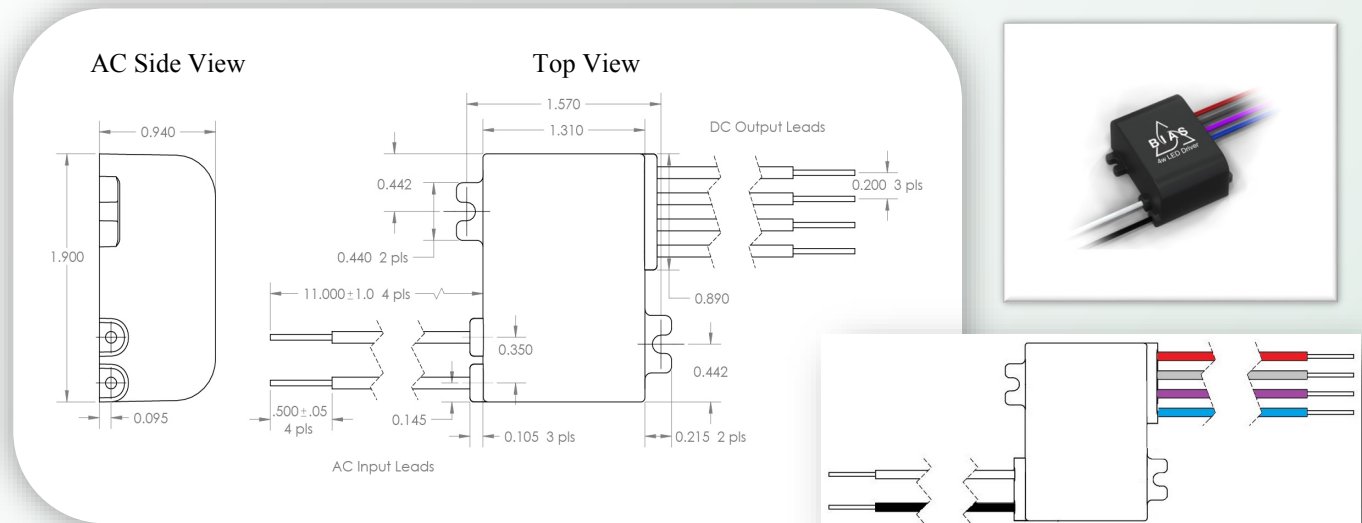

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [BIAS Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)