


BiT CAN-BUS Drag Chain



Drag chain cables

Data transmission cables for CAN-BUS network, designed for drag chain operations

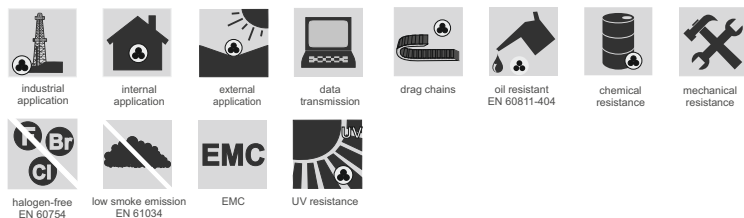

Technical data:

Operating temperature:
 Fixed installation: -50°C to 80°C
 Flexible connections: -40°C to 80°C
Wave impedance: 120Ω +/- 15%
Conductor loop resistance (max.): 56Ω/km
Insulation resistance (min.): 5GΩxkm
Capacitance: 40nF/km
Test voltage: 1500V
Wave attenuation at a frequency of:
 4 MHz = 2,5dB/100m
 16 MHz = 5,2dB/100m
Min. bending radius:
 Fixed installation: 5xØ
 Flexible connections: 10xØ

Construction:

Conductors: very finely stranded bare copper wires (42x0,1mm)
Insulation: foamed polyethylene with a thin external layer of solid polyethylene
Conductor colours: white and brown
Core arrangement: cores twisted together
Wrapping: special fleece tape
Screen: tinned copper wire braid
Sheath: special PUR with enhanced resistance to abrasion, chemicals, resistant to oil and industrial coolants, UV resistant
Sheath colour: purple

Application:

BiT CAN-BUS Drag Chain cable for data transmission in CAN (Control Area Network) is designed for continuous operation in drag chains withstanding at least 10mln bending cycles within a chain. Cable suitable both for indoor and outdoor applications. Cables classified according to **EN 50575 (CPR)**.

Cat. no.	nx2xmm	Outer diameter [mm]	Approx. cable weight [kg/km]	Cu [kg/km]
EB0050	1x2x0,34	7,0	60	30,0

Cable Factory BITNER reserves the right to modify specifications without prior notification

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [BITNER](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)
[500](#) [877541-000](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497](#)
[0001000](#)