


BiTLAN U/UTPf cat. 5e outdoor

200 MHz


Data transmission cable suitable for external applications

BITNER BiTLAN U/UTPf cat. 5e outdoor



 RoHS 2011/65/UE

 LVD 2006/95/WE

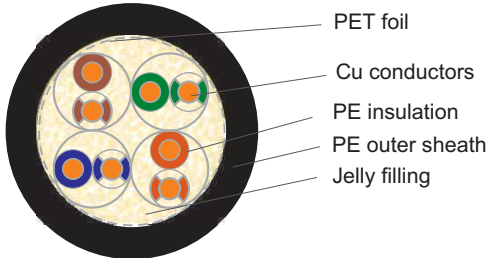

PET foil

Cu conductors

PE insulation

PE outer sheath

Jelly filling

Technical data:

Operating temperature:

Fixed installation: -30°C to +80°C

Flexible connections: -10°C to +50°C

Bending radius: 6xO.D.

DC loop resistance at 20°C (max):

190 Ω/km

Insulation resistance (min): 5GΩ x km

Resistance unbalance: ≤ 2%

Capacitance at 1 kHz: 50 ± 5 nF/km

Capacitance unbalance at 1 kHz (max):

1600 pF/km

Nominal voltage: 150 V

Test voltage: AC 50 Hz: 700V

DC: 1000V

Characteristic impedance: 100 ± 5Ω

NVP value: 67%

Return loss (min):

f = 4 ÷ 10 MHz: 20 + 5lg(f)

f = 10 ÷ 20 MHz: 25

f = 20 ÷ 200 MHz: 25 - 7lg(f/20)

Construction:

Conductors: solid round copper conductors

Insulation: special polyolefin compound

Core identification: wh/bu-bu, wh/or-or, wh/gn-gn, wh/bn-bn

Core arrangement: cores twisted in pairs, pairs twisted together

Filling: hydrophobic jelly filling

Outer sheath: special PE (UV)

Outer sheath colour: black

Application:

BiTLAN U/UTPf cat. 5e outdoor cables are applicable to computer networks with operating frequency band up to 200 MHz. Suitable for transmission of data, audio and video signals with bitrate up to 1 Gb/s. Cables are filled with gel preventing water ingress. UV resistant outer sheath enables external application and direct burial.



External application



Underground installation



Data transmission



UV resistant

ID	Construction	Cu wire	O.D. [mm]	Cu [kg/km]	Cable weight [kg]	Bandwidth [MHz]
TI0012	U/UTPf cat.5e outdoor	24AWG (0,5)	6,2	15	40	200

Cable Factory BITNER reserves the right to modify the specifications without prior notice





BiTLAN U/UTPf cat. 5e outdoor

200 MHz

Data transmission cable suitable for external applications

Performance test charts and data:

Frequency MHz	1	4	10	16	20	30	45	60	80	100	120	130	155	175	200
Attenuation \leq dB/100m	2,1	4,0	6,3	8,0	9,0	11,2	13,9	16,2	18,9	21,3	23,6	24,7	27,2	29,2	31,5
NEXT \geq dB/100m	65,3	56,3	50,3	47,2	45,8	43,1	40,5	38,6	36,7	35,3	34,1	33,6	32,4	31,6	30,8
PS NEXT \geq dB/100m	62,3	53,3	47,3	44,2	42,8	40,1	37,5	35,6	33,8	32,3	31,1	30,6	29,5	28,6	27,8
ELFEXT \geq dB/100m	63,8	51,8	43,8	39,7	37,8	34,3	30,7	28,2	25,7	23,8	22,2	21,5	20,0	19,0	17,8
PS ELFEXT \geq dB/100m	60,8	48,8	40,8	36,7	34,8	31,3	27,7	25,2	22,7	20,8	19,2	18,5	17,0	16,0	14,8
RL \geq dB	20,0	23,0	25,0	25,0	25,0	23,8	22,5	21,7	20,8	20,1	19,5	19,3	18,8	18,4	18,0

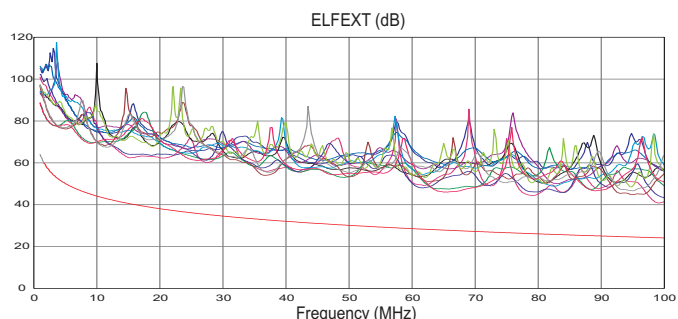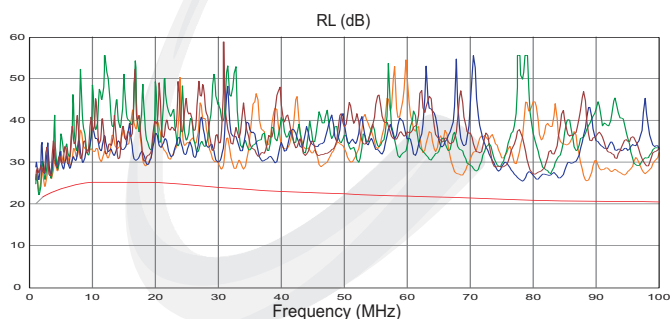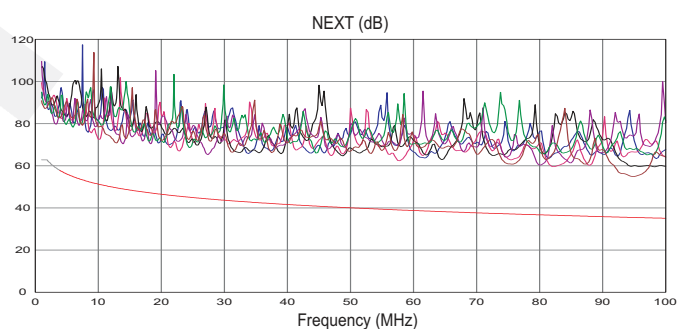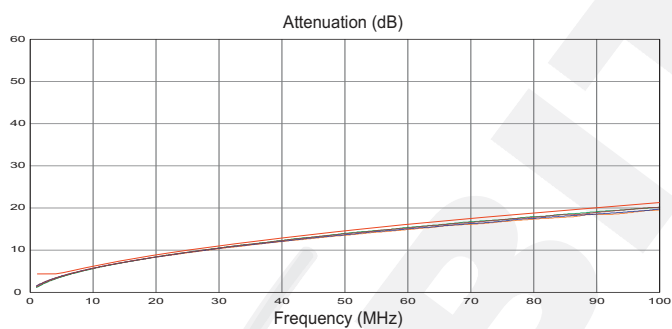

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [BITNER](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)