

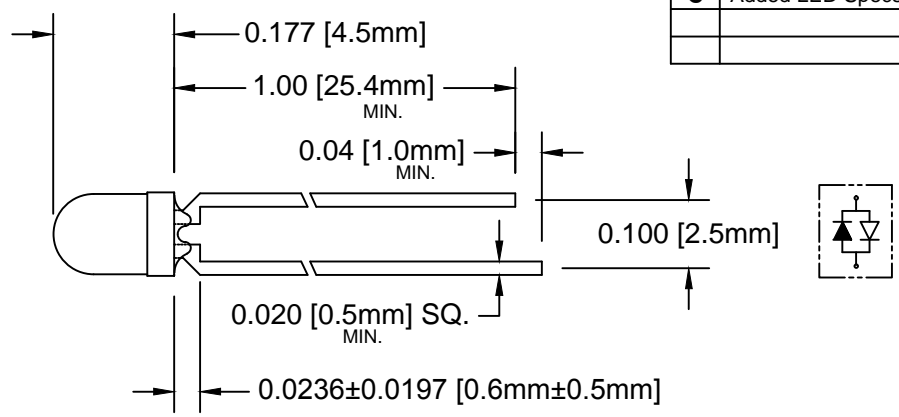
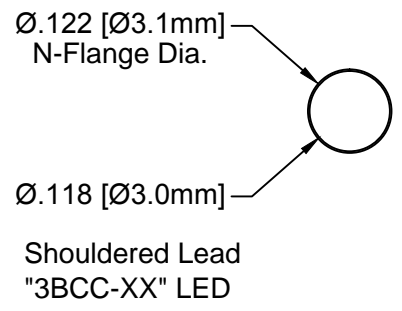


REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	01/15/09	T. Y.
B	Added R/Y & A/G LED Specs	05/06/10	T. Y.
C	Added LED Specs	02/10/15	J. C.

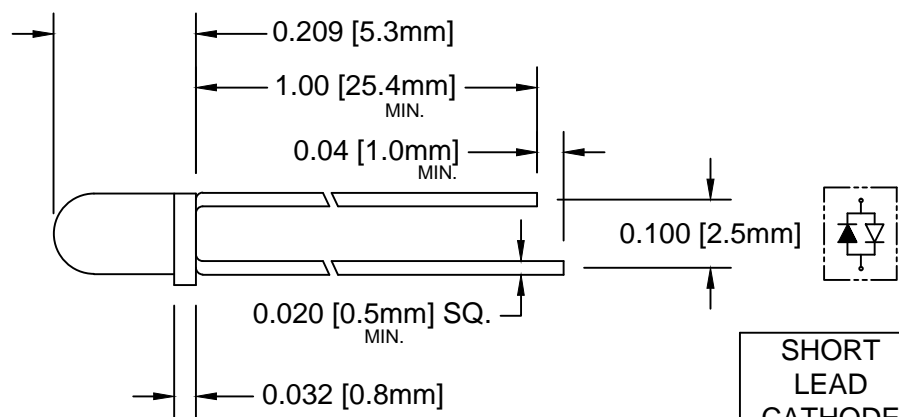

Recommended Mounting  
Hole Size =  $\varnothing.032^{+.003}_{-.002}$

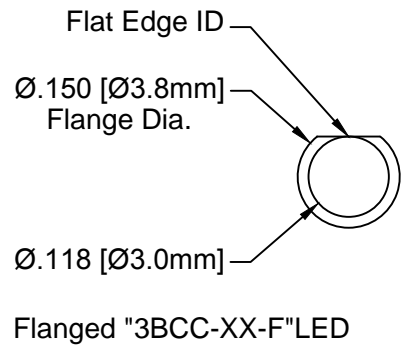

SHORT LEAD CATHODE	PART NO.	LONG LEAD CATHODE
RED	3BCC-X	GREEN
YELLOW	3BCC-Y/G-X	GREEN
RED	3BCC-R/Y-X	YELLOW
AMBER	3BCC-A/G-X	GREEN



### ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

REVERSE VOLTAGE _____	5V
REVERSE CURRENT _____	100µA
OPERATING TEMPERATURE RANGE _____	-25°C - 85°C
STORAGE TEMPERATURE _____	-30°C - 100°C
LEAD SOLDERING TEMPERATURE(1/16" FROM BODY) _____	260°C FOR 5 SECONDS

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 <b>BIVAR</b> <sup>®</sup> 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	<b>TITLE:</b> T1 (3mm) BI-COLOR LED <b>PART NO.:</b> 3BCC-XX-X <b>REVISION:</b> C	
.XX ± .02			
.XXX ± .010			
DESIGNED: <b>Raffy Paje</b>	DATE: <b>01/15/09</b>	<b>CAGE CODE : 32559</b>	
CHECKED: <b>F. Jensen</b>	DATE: <b>01/15/09</b>	<b>SHEET # 1 OF 2</b> <small>CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.</small>	

SEE SHEET #1		

LED Part No.	Chip			Lens Appearance	Absolute Max. Ratings				Electro-Optical Data @ 20mA			Viewing Angle 2 $\theta$ 1/2 (Deg)
	Material	Peak Wave Length $\lambda_p$ (nm)	Emitted Color		$\Delta\lambda$ (nm)	Pd (mW)	If (mA)	Peak If(mA)	Vf (V)		Iv (mcd)	
									Typ.	Max.	Typ.	
3BCC	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	10	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	10	40
3BCC-F	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-Y/G	GaAsP/GaP	590	YELLOW	WATER CLEAR	35	80	30	150	2.0	2.8	4	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	6	40
3BCC-Y/G-F	GaAsP/GaP	590	YELLOW	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-R/Y	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	590	YELLOW		30	80	30	150	2.0	2.8	6	40
3BCC-R/Y-F	GaAsP/GaP	625	RED	WATER CLEAR	35	80	30	150	2.0	2.8	8	40
	GaP/GaP	590	YELLOW		30	80	30	150	2.0	2.8	6	40
3BCC-A/G	GaAsP/GaP	605	AMBER	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40
3BCC-A/G-F	GaAsP/GaP	605	AMBER	WATER CLEAR	35	80	30	150	2.0	2.8	6	40
	GaP/GaP	568	GREEN		30	80	30	150	2.1	2.8	8	40

STANDARD TOLERANCE ( UNLESS OTHERWISE SPECIFIED ) DECIMALS                      ANGULAR		 <b>BIVAR</b> <sup>®</sup> 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808    FAX: (949) 951-3974	
			
DESIGNED: <b>Raffy Paje</b>	DATE: <b>01/15/09</b>	PART NO: <b>3BCC-XX-X</b>	REVISION: <b>C</b>
CHECKED: <b>F. Jensen</b>	DATE: <b>01/15/09</b>	CAGE CODE : <b>32559</b>	SHEET # <b>2 OF 2</b>
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category](#):*

*Click to view products by [Bivar manufacturer](#):*

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#) [LTL-87HD4B](#) [HLMP-EL30-PS0DD](#)  
[1L0532V23G0TD001](#) [NSPW500CS](#) [NTE30036](#) [NTE30044](#) [NTE30059](#) [NTE3020](#) [LD CQDP-1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#)  
[LP379PPG1C0G0300001](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#)  
[264-7SYGD/S530-E2](#) [HLMP1385](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-1234A](#) [LTL-2251AT](#) [LTL-307YE-012](#) [LTL-403HR](#) [LTL-4222](#) [LU7-E-](#)  
[B](#) [4380H1](#) [TLHY44K1L2](#) [HLMP-3962-F0002](#) [HLMP-GG15-R0000](#) [323-2SURD/S530-A3](#) [L53SRC/E-Z](#) [L-7679C1ZGC](#) [4302T1-5V](#)  
[4306D23](#) [4363D1/5](#) [WP1503SRC/J4](#) [WP153GDT](#) [WP153YDT](#) [WP1543SGC](#) [WP1543SURC](#) [WP53MGD](#)