

PART NO.	н	F	Т		
460-060	.060 (1.5)	.010 (.25)			
460-070	.070 (1.8)	.015 (.38)			
460-080	.080 (2.0)	.020 (.51)			
460-090	.090 (2.3)	.025 (.64)			
460-100	.100 (2.5)	.030 (.76)			
460-110	.110 (2.8)	.035 (.89)			
460-120	.120 (3.0)	.040 (1.0)			
460-130	.130 (3.3)	.045 (1.1)			
460-140	.140 (3.6)	.050 (1.3)	.040 (1.0)		
460-150	.150 (3.8)	.055 (1.4)			
460-160	.160 (4.1)	.060 (1.5)			
460-170	.170 (4.3)	.065 (1.7)			
460-180	.180 (4.6)	.070 (1.8)			
460-190	.190 (4.8)	.075 (1.9)			
460-200	.200 (5.1)	.080 (2.0)			
460-210	.210 (5.3)	.085 (2.2)			
PART NO.	н	F	Т		
461-360	.360 (9.1)	.010 (.25)			
461-380	.380 (9.7)	.020 (.51)			
461-400	.400 (10.2)	.030 (.76)			
461-420	.420 (10.7)	.040 (1.0)			
461-440	.440 (11.2)	.050 (1.3)			
461-460	.460 (11.7)	.060 (1.5)	.340 (8.6)		
461-480	.480 (12.2)	.070 (1.8)		PART NO.	Н
461-500	.500 (12.7)	.080 (2.0)		465-200	.200 (5.1)
461-520	.520 (13.2)	.090 (2.3)		465-210	.210 (5.3)
461-540	.540 (13.7)	.100 (2.5)		465-220	.220 (5.6)
	l			465-230	.230 (5.8)
PART NO.	н	F	Т	465-240	.240 (6.1)
462-560	.560 (14.2)	.010 (.25)		465-250	.250 (6.4)
462-580	.580 (14.7)	.020 (.51)		465-260	.260 (6.6)
462-600	.600 (15.2)	.030 (.76)		465-270	.270 (6.9)
462-620	.620 (15.7)	.040 (1.0)		465-280	.280 (7.1)
462-640	.640 (16.3)	.050 (1.3)		465-290	.290 (7.4)
642-660	.660 (16.8)	.060 (1.5)	.540 (13.7)	465-300	.300 (7.6)
462-680	.680 (17.3)	.070 (1.8)		465-310	.310 (7.9)
462-700	.700 (17.8)	.080 (2.0)		465-320	.320 (8.1)
462-720	.720 (18.3)	.090 (2.3)		465-330	.330 (8.4)
462-730	.730 (18.5)	.095 (2.4)		465-340	.340 (8.6)
462-740	.740 (18.8)	.100 (2.5)		465-350	.350 (8.9)

REV.	DESCRIPTION	DATE	APPROVED
В	Engineering Update w/o Changes	02/23/04	M. C.
c	Added 03-NL-BK Material Code.	08/27/07	M. C.
D	Updated Model.	07/23/08	M. C.

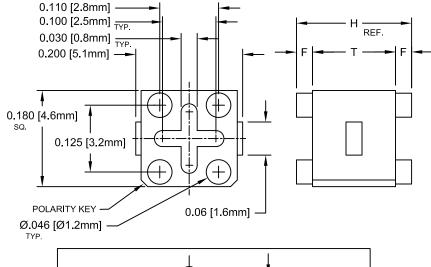

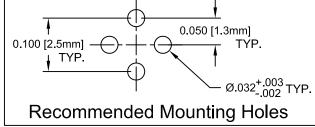

## Note: For 460-XXX, parts are available in black.

STANDARD TOI (UNLESS OTHERWIS DECIMALS .X ± .1 .XX ± .01		4 THOMAS, IRVINE, CA. 92 TEL: (949) 951-8808 FAX: (949) 951			
.XXX ±.005		TITLE: T-1(3mm) & T-1 <sup>3</sup> / <sub>4</sub> (5mm) INDIVIDUAL LED MOUNTS			
DESIGNED:	DATE:	PART NO:		REVISION:	
David Green 08/0		46X-XXX		D	
CHECKED:	DATE:	CAGE CODE: 32559	SHEET # 1	<b>OF</b> 1	
M. Chen	08/07/03	CAD GENERATED DOCUMENT, D	O NOT MEASURE	DRAWING.	

.025 (.64) .030 (.76) .035 (.89) .040 (1.0) .045 (1.1) .050 (1.3) .055 (1.4) .060 (1.5) .065 (1.7) .150 (3.8) .070 (1.8) .075 (1.9) .080 (2.0) .085 (2.2) .090 (2.3) .095 (2.4) .100 (2.5) 465-350 350 (8.9)

F

Т

- 3. MATERIAL: NYLON 6/6, 94V-2, BLACK. BIVAR MATERIAL CODE 03-NL-BK. BASF ULTRAMID NYLON 6/6 A3K, PRE-COLORED IN BLACK.
- 2. MATERIAL: NYLON 6/6, 94V-2, NATURAL. BIVAR MATERIAL CODE 03-NL. BASF ULTRAMID NYLON 6/6 A3K NATURAL.
- 1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Mounting Hardware category:

Click to view products by Bivar manufacturer:

Other Similar products are found below :

Bivar