


ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	H-201C	T-1 (3mm) Bi-Level LED Holder, 90° Mount
2	2	3XX-S	T-1 (3mm) N-Flange Shouldered LED, See Page 2

REV.	DESCRIPTION	DATE	APPROVED
E	Removed H201CBCXX Specifications	01/25/08	M. C.
F	Updated Note and H201CAD Specs	04/28/08	M. C.
G	Updated Note and H201CRD5V Specs	05/20/08	M. C.
H	Added H201CGC Specs	11/18/08	T. Y.
J	Engineering Update w/o Changes	06/21/16	J. C.

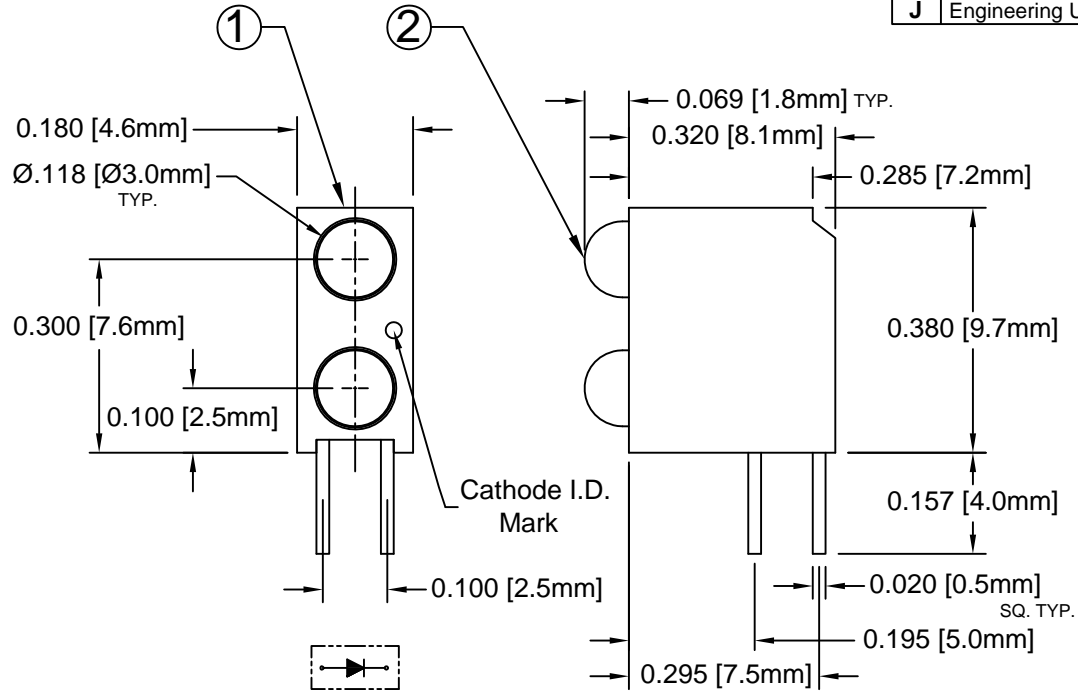


Note: P/N Designation

H201CY X D X X

- Color of top LED - Use "X" if blank
- Color of bottom LED - Use "X" if blank
- "L" Low Current LED
- "5V" 5V LED
- " " if Standard LED

- If top and bottom are same LED, i.e. H201C_{YD}

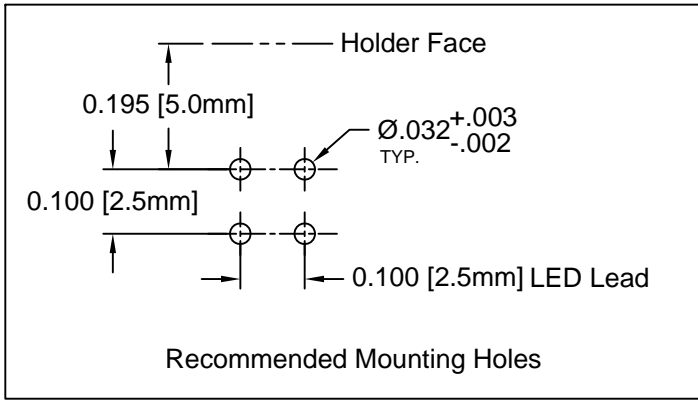

ABSOLUTE MAXIMUM RATINGS (Ta=25° C)

REVERSE VOLTAGE	_____	5V
REVERSE CURRENT	_____	100µA
OPERATING TEMPERATURE RANGE	_____	-25° C - 85° C
STORAGE TEMPERATURE	_____	-30° C - 100° C
LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)	_____	260° C FOR 5 SECONDS



STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGULAR
.X ± .1	X° ± 1°
.XX ± .02	
.XXX ± .010	



DESIGNED: T. Yin	DATE: 03/05/04	TITLE: T-1 (3MM) 90° BI-LEVEL LED ASSY	REVISION: J
CHECKED: D. Green	DATE: 03/05/04	PART NO: H201CXX	CAGE CODE : 32559 SHEET # 1 OF 2
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			

REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET #1		

LED Assy. No.	Peak Wave Length λ_p (nm)	Emitted Color	Lens Appearance	Electro-Optical Data				Viewing Angle $2\theta \frac{1}{2}$ (Deg)	LED P/N
				If (mA)	Vf (V)		Iv (mcd)		
				TYP	TYP	MAX	TYP		
STANDARD				Data @ 20mA					
H201CBWD	430	BLUE	DIFFUSED	20	4.0	4.5	10	40	3BWD-S
H201CGD	568	GREEN	DIFFUSED	20	2.1	2.8	25	40	3GD-S
H201CGC	568	GREEN	WATER CLEAR	20	2.1	2.8	40	30	3GC-S
H201CYD	590	YELLOW	DIFFUSED	20	2.0	2.8	20	40	3YD-S
H201CHD	625	HE RED	DIFFUSED	20	2.0	2.8	30	40	3HD-S
H201CRD	700	RED	DIFFUSED	20	2.1	2.8	2	40	3RD-S
H201CSR	645	SUPER RED	DIFFUSED	20	1.7	2.4	40	40	3SRD-S
H201CAD	605	AMBER	DIFFUSED	20	2	2.8	25	40	3AD-S
LOW CURRENT				Data @ 2mA					
H201CGDL	568	GREEN	DIFFUSED	2	2.1	2.6	2	40	3GDL-S
H201CYDL	590	YELLOW	DIFFUSED	2	2.0	2.6	2	40	3YDL-S
H201CHDL	625	HE RED	DIFFUSED	2	2.0	2.6	3	40	3HDL-S
H201CRDL	700	RED	DIFFUSED	2	2.1	2.6	1	40	3RDL-S
5 VOLT				Data @ 5V					
H201CGD5V	568	GREEN	DIFFUSED	-	-	5.0	25	40	3GD5V-S
H201CYD5V	590	YELLOW	DIFFUSED	-	-	5.0	20	40	3YD5V-S
H201CHD5V	625	HE RED	DIFFUSED	-	-	5.0	30	40	3HD5V-S
H201CRD5V	700	RED	DIFFUSED	-	-	5.0	2	40	3RD5V-S

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) $\pm 10\%$ ALL VALUES ANGULAR		 BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
			
DESIGNED: T. Yin	DATE: 03/05/04	PART NO: H201CXX	
CHECKED: D. Green	DATE: 03/05/04	REVISION: J	
		CAGE CODE : 32559 SHEET # 2 OF 2	
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Board Hardware - PCB category](#):

Click to view products by [Bivar manufacturer](#):

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [5970-1-15-01-32-14-04-0](#) [8579-1-15-15-11-27-10-0](#) [PRUEF 1 RED](#) [PRUEF 2 RED](#) [PW1616](#) [1548-103](#) [2317-2-00-50-00-00-07-0](#) [2506-2-00-50-00-00-07-0](#) [SCREWCLAMP EASY2](#) [SCREWCLAMPEASY750GEO](#) [9873-0-15-80-02-80-10-0](#) [2104-2-01-80-00-00-07-0](#) [PG-9](#) [2308-4-00-44-00-00-07-0](#) [2314-2-01-50-00-00-07-0](#) [2352-3-01-50-00-00-07-0](#) [2506-3-00-50-00-00-07-0](#) [251-103](#) [3330-1-00-15-00-00-03-0](#) [430-107](#) [TO-100-030](#) [TO-16-030E](#) [TO-203-040E](#) [TO-24-100](#) [TO-64-030](#) [5062-0-00-21-00-00-33-0](#) [5108](#) [325-102](#) [WLPL-141](#) [Z4.102.1680.0](#) [5119](#) [0153-4-15-80-30-27-04-0](#) [0252-0-15-01-32-27-10-0](#) [0253-0-15-15-30-27-10-0](#) [0255-0-15-01-30-27-04-0](#) [0290-0-00-15-00-00-03-0](#) [0309-2-15-80-47-27-10-0](#) [02-41](#) [0405-0-15-80-34-27-04-0](#) [0569-0-15-15-11-27-10-0](#) [0579-0-15-01-11-27-10-0](#) [0489-0-15-01-11-27-04-0](#) [0489-2-15-15-11-27-04-0](#) [0553-1-15-01-11-27-10-0](#) [0554-0-15-15-11-27-10-0](#) [0579-0-15-15-21-14-10-0](#) [0660-0-15-80-30-27-10-0](#) [0675-0-15-80-30-84-10-0](#) [0680-0-15-15-32-27-10-0](#)