

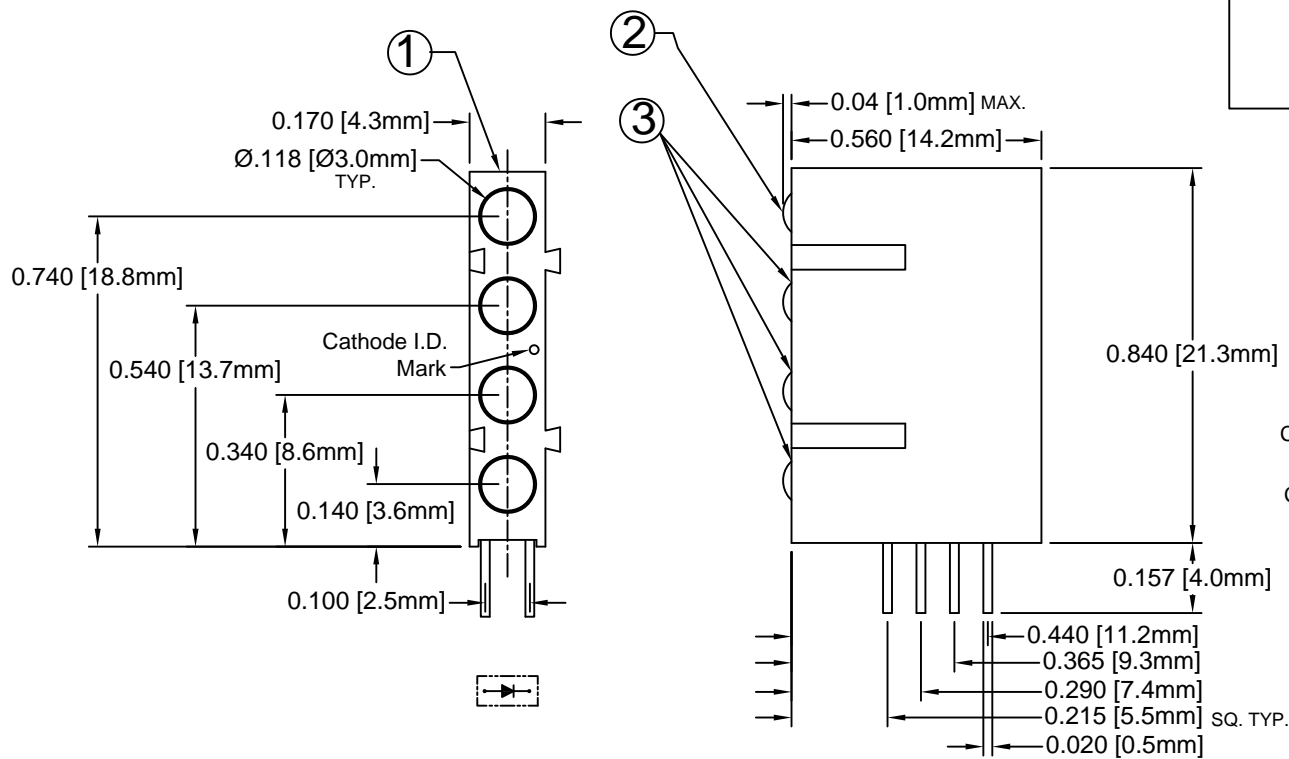


ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	H-400C	T-1 (3mm) Quad-Level LED Holder, 90° Mount, Interlocking
2	1	3XX-LL	T-1 (3mm) N-Flange LED, Long Leads
3	3	3XX-S	T-1 (3mm) N-Flange Shouldered LED, See Page 2

REV.	DESCRIPTION	DATE	APPROVED
E	Updated to Previous Protrusion	04/10/08	M. C.
F	Added P/N Designation	09/30/08	M. C.
G	Added H400CAD Specs	04/13/09	T. Y.
H	Updated LED Protrusion Dimension	08/11/11	T. Y.
J	Engineering Update w/o Changes	08/04/16	J. C.

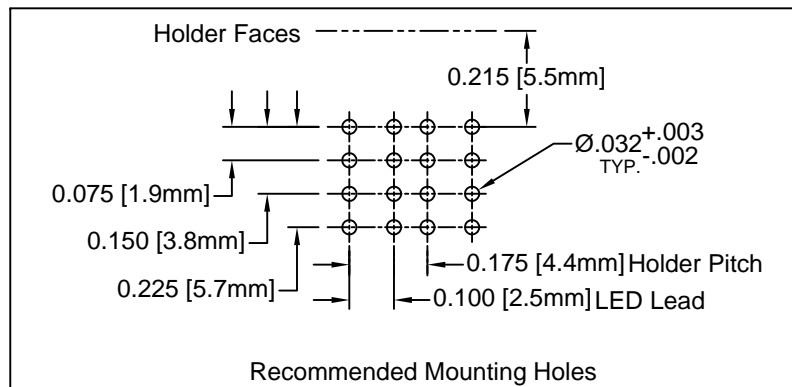

NOTE: P/N DESIGNATION

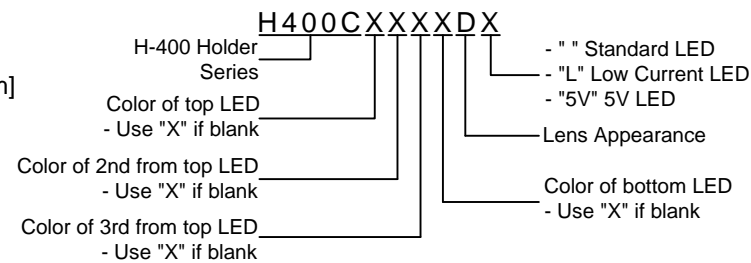

-If LEDs are the same, use e.g. H400CGD
All Green Diffused LEDs



ABSOLUTE MAXIMUM RATINGS (Ta=25° C)

REVERSE VOLTAGE	5V
REVERSE CURRENT	100uA
OPERATING TEMPERATURE RANGE	-25° C - 85° C
STORAGE TEMPERATURE	-30° C - 100° C
LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)	260° C FOR 5 SECONDS

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) DECIMALS ANGULAR .X ± .1 X° ± 1° .XX ± .02 .XXX ± .010		BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DESIGNED: T. Yin	DATE: 03/08/04	PART NO: H400CXX	REVISION: J
CHECKED: D. Green	DATE: 03/08/04	CAGE CODE : 32559	SHEET # 1 OF 2
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			

REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET #1		

LED Assy. No.	Peak Wave Length λ_p (nm)	Emitted Color	Lens Appearance	Electro-Optical Data				Viewing Angle $2\theta \frac{1}{2}$ (Deg)	LED P/N
				If (mA)	Vf (V)		Iv (mcd)		
				TYP	TYP	MAX	TYP		
STANDARD				Data @ 20m A					
H400CAD	605	AMBER	DIFFUSED	20	2.0	2.8	25	40	3AD-S
H400CBWD	430	BLUE	DIFFUSED	20	4.0	4.5	10	40	3BWD-S
H400CGD	568	GREEN	DIFFUSED	20	2.1	2.8	25	40	3GD-S
H400CYD	590	YELLOW	DIFFUSED	20	2.0	2.8	20	40	3YD-S
H400CHD	625	HE RED	DIFFUSED	20	2.0	2.8	30	40	3HD-S
H400CRD	700	RED	DIFFUSED	20	2.1	2.8	2	40	3RD-S
H400CSR	645	SUPER RED	DIFFUSED	20	1.7	2.4	40	40	3SRD-S
LOW CURRENT				Data @ 2m A					
H400CGDL	568	GREEN	DIFFUSED	2	2.1	2.6	2	40	3GDL-S
H400CYDL	590	YELLOW	DIFFUSED	2	2.0	2.6	2	40	3YDL-S
H400CHDL	625	HE RED	DIFFUSED	2	2.0	2.6	3	40	3HDL-S
5 VOLT				Data @ 5V					
H400CGD5V	568	GREEN	DIFFUSED	8	-	5.0	25	40	3GD5V-S
H400CYD5V	590	YELLOW	DIFFUSED	8	-	5.0	20	40	3YD5V-S
H400CHD5V	625	HE RED	DIFFUSED	8	-	5.0	30	40	3HD5V-S

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) $\pm 10\%$ ALL VALUES ANGULAR		 BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
			
DESIGNED: T. Yin	DATE: 03/08/04	TITLE: T-1 (3MM) INTERLOCKING 90° QUAD-LEVEL LED ASSY	
CHECKED: D. Green	DATE: 03/08/04	PART NO: H400CXX	REVISION: J
		CAGE CODE : 32559	SHEET # 2 OF 2
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Circuit Board Indicators](#) category:

Click to view products by [Bivar](#) manufacturer:

Other Similar products are found below :

[568-0200-132F](#) [568-0701-841F](#) [568-0734-832F](#) [569-0312-300F](#) [591-2001-107F](#) [592-2222-302F](#) [592-2424-302F](#) [LTL-4221NH129](#) [LTL-42DGNMHDP1](#) [LTM-260-5HT](#) [H131CSRT-120](#) [HLMP1503108F](#) [HLMP1521101](#) [HLMP1523802F](#) [HLMP1700101F](#) [HLMP1700104F](#) [HLMP1790105F](#) [BHA-1564-G](#) [SMF-HM1530YD-305](#) [SSF-LXH103SUGD-04](#) [AM2520EHSGD](#) [HLMP1301104F](#) [HLMP1385101F](#) [HLMP1421101](#) [HLMP1503103F](#) [HLMP1503104F](#) [HLMP1700102F](#) [HLMP1700106F](#) [HLMP1700107F](#) [HLMP1790101F](#) [HLMP1790103F](#) [LTL-4211NHBP](#) [5320F7](#) [5330H7](#) [5350T7](#) [5352T1-5VLC](#) [5352T5-5VLC](#) [5370T7LC](#) [550-1112F](#) [550-3107-010F](#) [551-0206-003F](#) [551-0207-815F](#) [551-0212-801F](#) [551-2802F](#) [552-0794-810F](#) [552-0821F](#) [552-6033-200F](#) [553-0001-808F](#) [553-0122-818F](#) [553-0171F](#)