

FEATURES:

- Semi-Diffused
- Instant On
- Directional Efficiency
- Mercury Free
- Low Profile
- Lead Free
- Long Life
- No UV

The Peninsula's durable plastic construction makes it an economical lightweight luminaire delivering a wide range of semi-diffused light output.

SPECIFICATIONS

Color Temperature	Lumen Output	Efficacy (lm/W)	Color Rendering Index (CRI)
Cool (C) - 6500K	190	95	80
Neutral (N) - 4500K	180	90	75
Warm (W) - 3000K	170	85	70
Soft (S) - 2700K	160	85	66



Rated Life:	50,000 hours
Beam Angle:	120°
Power Consumption:	2 Watts
Operating Temperature:	0° C ~+ 40° C
Voltage Input:	24VDC, Constant Voltage
Controls:	See Accessory SW-1001
Housing:	Extruded Plastic, Black Polycarbonate Lens, Clear
Weight:	53
Dimensions:	W .83" (21.1mm) H .60" (15.2mm) L 12" (304.8mm) ** **not including mounts

Compliance:



Restriction of Hazardous Substances Directive (RoHS) implements EU Directive 2002 / 95 which bans placing electrical and hazardous equipment that contains more than agreed levels of hazardous substances on the EU market. For a list of these substances, visit www.rohs.gov.uk.

DIMENSIONS

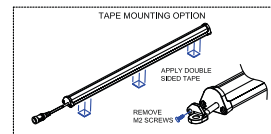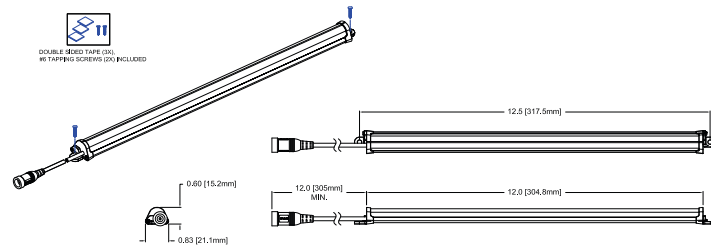

PENINSULA SERIES

P3100 STANDARD (S)

ORDERING INFORMATION

Choose the option that best suits your needs and write its corresponding code on the appropriate line to form product code.

Model	Color	Type	Example
P3100	C - 6500K N - 4500K W - 3000K S - 2700K	S-Standard	P3100-C-S

All luminaires are easily customizable. Please contact us to inquire about customizing a luminaires to fill your needs.

Order power accessories as separate catalog numbers from the Accessories section below. (Note: 2 mounting screws and double sided tape included for mounting of Standard luminaires.)

ACCESSORIES

Universal Regulated Quick Connect Power Supply (North American Plug)

Universal Regulated Quick Connect Power Supply (Euro Plug)




In-line On/Off Switch

Califia Lighting Part #WA-UL-001

Califia Lighting Part #WA-VDE-001

Califia Lighting Part #SW-1001

PHOTOMETRY CHARACTERISTICS

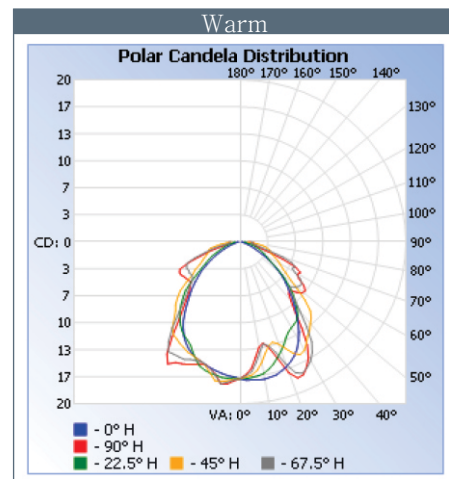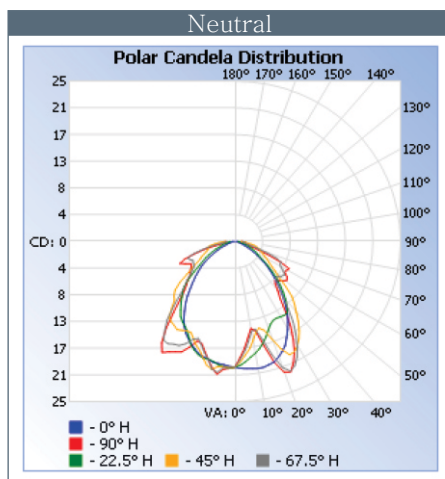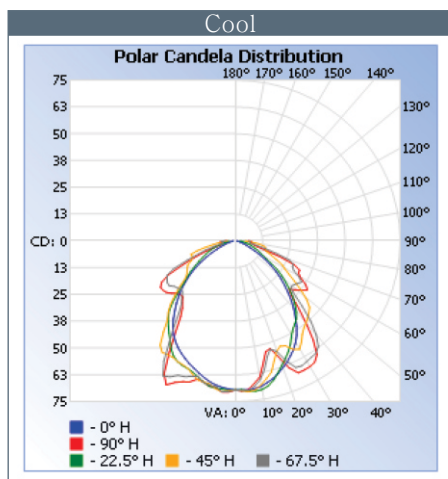

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Fixtures](#) category:

Click to view products by [Bivar](#) manufacturer:

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [113163000-00662717](#) [113472000-00691461](#) [XVBC2B3](#) [XVBC2B7](#) [XVBC4B4](#) [XVBC4B5](#) [XVBC4B6](#)
[XVBC4M3](#) [XVBC4M4](#) [XVBC4M5](#) [XVBC4M8](#) [XVBZ01](#) [XVBZ03A](#) [XVBZ04](#) [E35600](#) [FLK7LED](#) [XVBZ04A](#) [XVBC4M7](#) [XVBC4M6](#)
[XVBC4B3](#) [XVBC2B8](#) [2700127](#) [2702933](#) [2702477](#) [2403122](#) [2403121](#) [2402991](#) [89406068](#) [148-00076](#) [190007019-00014904](#) [226108019-](#)
[00610754](#) [4823](#) [4824](#) [4868](#) [112887037-00076065](#) [113021000-00564565](#) [113473000-00704968](#) [NB-RLAMP01](#) [112577000-00539774](#)
[113458000-00668976](#) [E35500](#) [408001403-00671626](#) [SL7/4-FW](#) [LML-6TER-CAB](#) [SL4-FMS-100](#) [SL4-FMS-400](#) [SL7-CB-400](#)