



615

Model 615 Compact Digital Lightmeter

This instrument is a portable easy to use 3 1/2 digit, compact sized digital lightmeter designed for simple one hand operation. It provides measurement in lux and fc units. The meter has a backlit LCD display, PEAK-HOLD (50ms pulse light) and DATA-HOLD feature.


- Peak Hold
- Display Hold

Specifications		model
		615
Measurement Range	20lux to 20klux, 20fc to 20kfc	
Resolution	0.01lux, 0.01fc	
Accuracy	+(3%rdg + 10dgt)	
Spectral Response	CIE photopic	
Sample Rate	2.5/sec.	
Operating Temp. & Humidity	32° to 122°F (0° to 50°C), at < 70% RH	
Storage Temp. & Humidity	-4° to 140°F (-20° to 60°C), 0 to 80% RH with battery removed	
Power Supply	9V battery	
Battery Life	> 200 hours typical	
Dimensions (HxWxD)	7.5 x 2.6 x 1.4" (190 x 65.5 x 35mm)	
Weight	7.76 oz. (220g)	

One Year Warranty

Environmental Testers

Enhance the utility of the Humidity/Temperature and Temperature meters with a selection of K-type temperature probes. Select the probe that best fits the application.

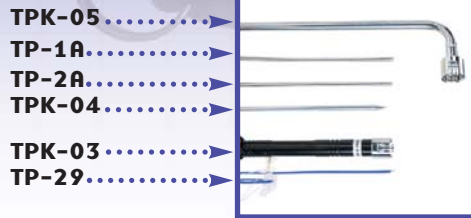

Temperature Probes

TPK-05

Surface Probe, Rt-Angle -58°~752°F (-50°~400°C)

TP-1A

Immersion Probe, Standard -58°~1,650°F (-50°~900°C)

TP-2A

Air & Gas Probe -40°~570°F (-40°~ 300°C)

TPK-04

Piercing Probe -58°~1,122°F (-50°~600°C)

TPK-03

Surface Probe, Standard -58°~752°F (-50°~400°C)

TP-29

Bead Probe, Standard -58°~392°F (-50°~200°C)

TP-3 (not shown)

Bead Probe, Hi-Temp -40°~900°F (-40°~480°C)

Model TP-5300

Platinum RTD Temperature Probe

TP-5300

- Platinum element
- Thin film RTD in stainless steel tube
- Resistance: 1000Ω
- Temperature rating: -58°~392°F (-50°~200°C)

Model TP-30B

Temperature Adapter

This self-powered adapter turns your multimeter into a thermometer. Measurement range is -58°F through 1832°F (-50°C through 1000°C). Input impedance of the meter must be at least 12kΩ, and the range must cover 0 to 1VDC (analog or digital). The TP-30B uses K-type thermocouple. The TP-29 general purpose temperature probe is included.

- °F / °C selectable
- Measures temperature of any surface, liquid or gas
- 1mV per degree
- Open probe warning



TP-30B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [B&K Precision](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [2837806](#) [4328074](#) [4366444](#) [S-11](#) [382153](#) [700PTP-1](#) [GEO-](#)
[CABLE-REEL-50M](#) [H300](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-H2S-100](#) [AW-NmHc-100](#) [ES1-CO-1000-01](#) [P 2801](#) [P 2802](#) [TM-197](#) [ULD-](#)
[420-EUR](#) [TM-192](#) [TM-192D](#) [TM-305U](#) [TM-414](#) [UT309C](#) [EL-P-TC-T-SURFACE](#) [UT301C+](#) [1500000059](#) [HS115](#) [MR59](#) [12227021](#)
[13123602](#) [13123661](#) [12255930](#) [30171091](#) [30198712](#) [30198755](#) [30209323](#) [12228657](#) [12229067](#) [12230090](#) [7358958](#) [12231398](#) [12231487](#)
[7390674](#) [7390682](#) [12231550](#)