

描述 / Descriptions

SOP-8 塑封封装互补增强模式 MOS 场效应管。
Complementary Enhancement MOSFET in a SOP-8 Plastic Package.

特征 / Features


N-channel	P-channel
$V_{DS}(V)=30V$	$V_{DS}(V)=-30V$
$I_D=6.9A$	$I_D=-6A$
$R_{DS(ON)}<32m\Omega (V_{GS}=10V)$	$R_{DS(ON)}<65m\Omega (V_{GS}=-10V)$
$R_{DS(ON)}<36m\Omega (V_{GS}=4.5V)$	$R_{DS(ON)}<75m\Omega (V_{GS}=-4.5V)$

无卤产品。Halogen-free Product.


用途 / Applications

用于高功率 DC/DC 转换和功率开关。适用于作负载开关或脉宽调制应用。
These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies. And suitable for use as a load switch or in PWM applications.

内部等效电路 / Equivalent Circuit

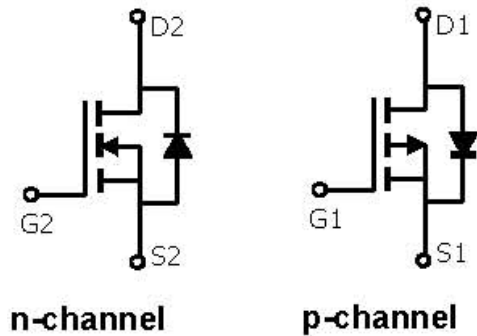

引脚排列 / Pinning

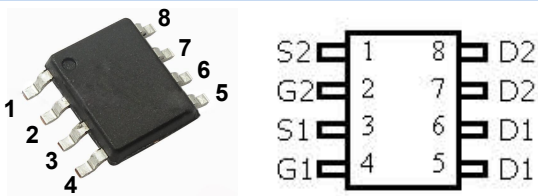

放大及印章代码 / h_{FE} Classifications & Marking

见印章说明。See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating		单位 Unit
		N-channel	P-channel	
Drain-Source Voltage	V_{DSS}	±30		V
Gate-Source Voltage	V_{GSS}	±12		V
Continuous Drain Current ^A	$I_D(T_A=25^\circ C)$	6.9	-6.0	A
	$I_D(T_A=70^\circ C)$	5.8	-5.0	A
Pulsed Drain Current ^B	I_{DM}	±30		A
Power Dissipation	$P_D(T_A=25^\circ C)$	2		W
	$P_D(T_A=70^\circ C)$	1.44		W
Maximum Junction-to-Ambient ^A	$R_{\theta JA}(t \leq 10s)$	62.5		°C/W
	$R_{\theta JA}$	110		°C/W
Maximum Junction-to-Lead ^C	$R_{\theta JL}$	60	4	°C/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150		°C

Notes:

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ C$. The value in any a given application depends on the user's specific board design. The current rating is based on the $t \leq 10s$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.







D. The static characteristics in Figures 1 to 6, 12, 14 are obtained using 80 μs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ C$. The SOA curve provides a single pulse rating.






N-沟道电性能参数/N-CHANNEL Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions		最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$	$I_D=250\mu A$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=24V$	$V_{GS}=0V$			1.0	μA
		$V_{DS}=24V$ $T_J=55^\circ C$	$V_{GS}=0V$			5.0	μA
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 12V$	$V_{DS}=0V$			100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$	$I_D=250\mu A$	0.65		1.3	V
On state drain current	$I_{D(on)}$	$V_{DS}=4.5V$	$V_{GS}=5.0V$	6.9			A
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$	$I_D=6.9A$		24	32	m Ω
		$V_{GS}=10V$ $T_J=125^\circ C$	$I_D=6.9A$		32.3	38	m Ω
		$V_{GS}=4.5V$	$I_D=5.0A$		27	36	m Ω
Forward Transconductance	g_{FS}	$V_{DS}=5.0V$	$I_D=5.0A$		9		S
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$	$I_S=1.0A$		0.76	1.0	V
Input Capacitance	C_{iss}	$V_{DS}=15V$ $f=1.0MHz$	$V_{GS}=0V$		680		pF
Output Capacitance	C_{oss}				102		pF
Reverse Transfer Capacitance	C_{rss}				77		pF
Gate resistance	R_g	$V_{DS}=0V$ $f=1.0MHz$	$V_{GS}=0V$		3.0		Ω
Total Gate Charge(10V)	Q_g	$V_{GS}=10V$ $I_D=6.9A$	$V_{DS}=15V$		13.84		nC
Total Gate Charge(4.5V)					6.74		nC
Gate-Source Charge	Q_{gs}				1.82		nC
Gate-Drain Charge	Q_{gd}				3.2		nC
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=15V$ $R_L=2.1\Omega$	$V_{GS}=10V$ $R_{GEN}=3\Omega$		4.6		ns
Turn-On Rise Time	t_r				4.1		ns
Turn-Off Delay Time	$t_{d(off)}$				20.6		ns
Turn-Off Fall Time	t_f				5.2		ns
Body Diode Reverse Recovery Time	t_{rr}	$I_F=6.9A$ $dI/dt=100A/\mu s$			16.5		ns
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F=6.9A$ $dI/dt=100A/\mu s$			7.8		nC

N-沟道电参数曲线图 / N-CHANNEL Electrical Characteristic Curve

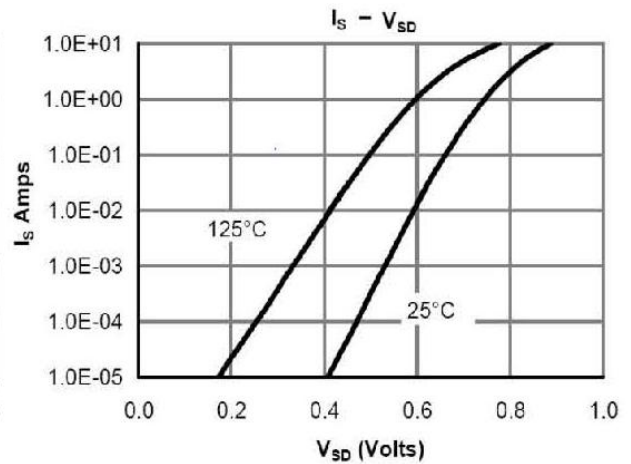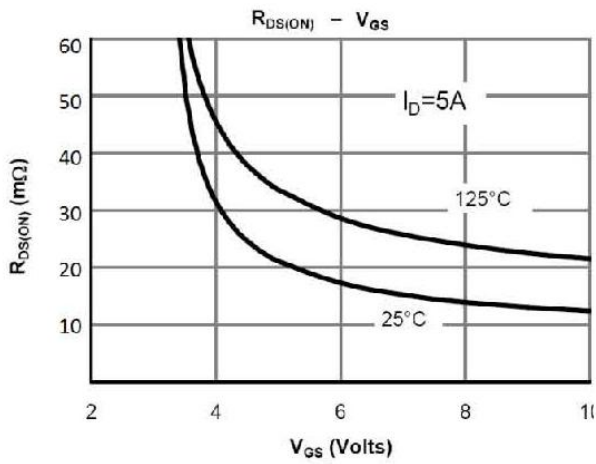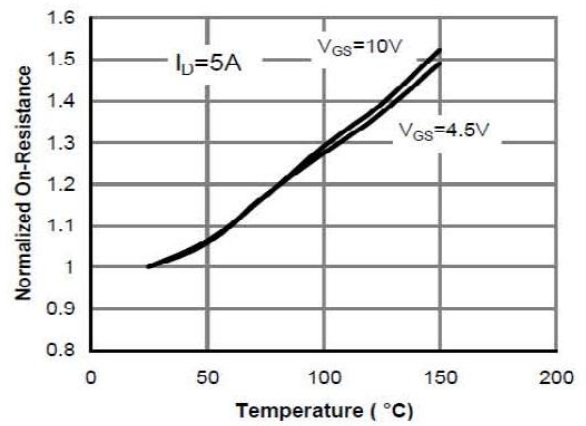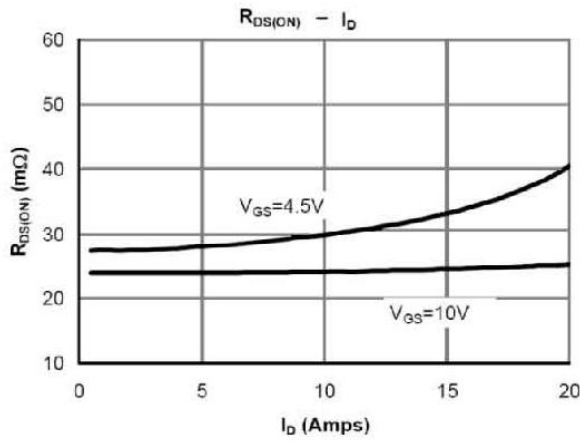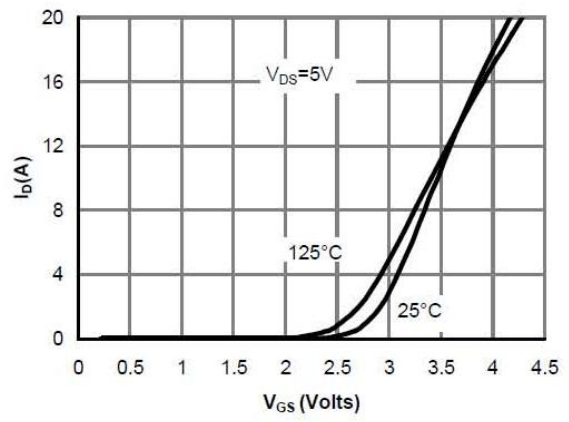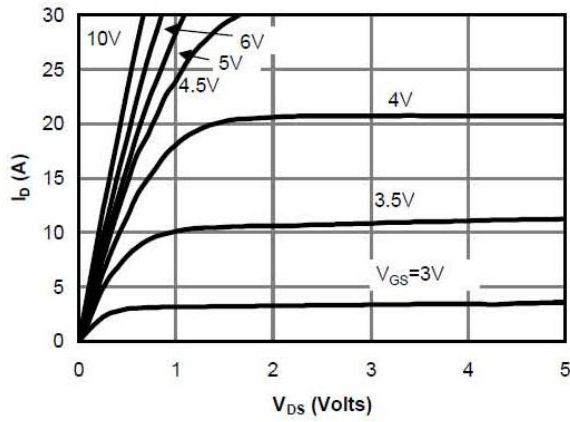







N-沟道电参数曲线图 / N-CHANNEL Electrical Characteristic Curve

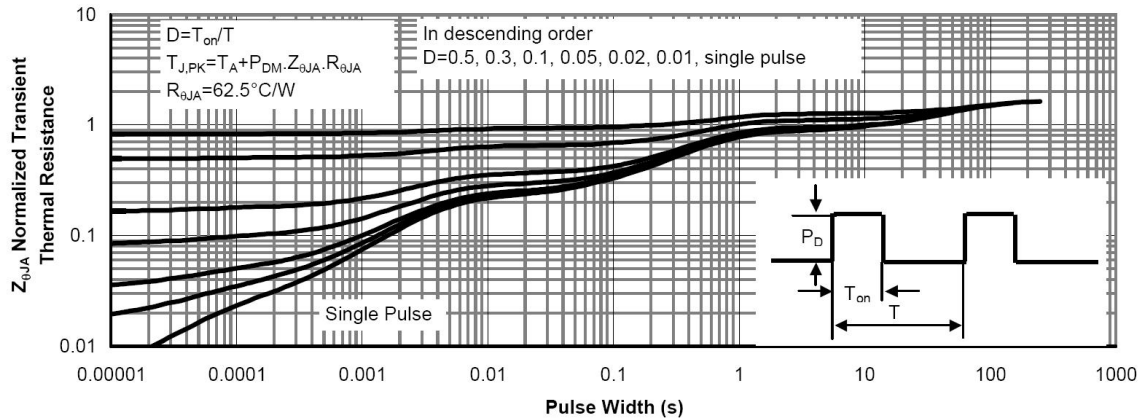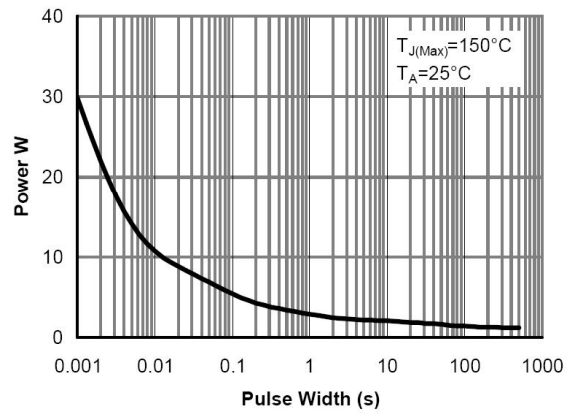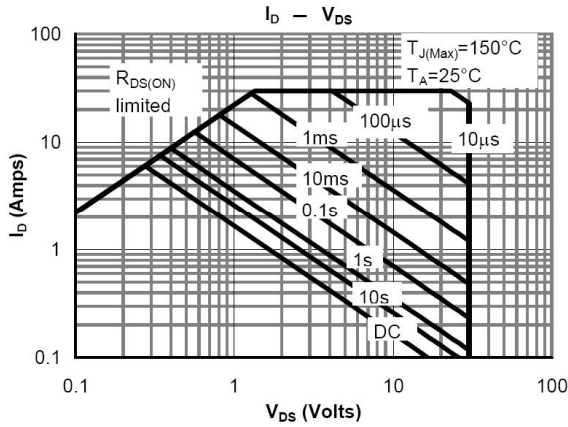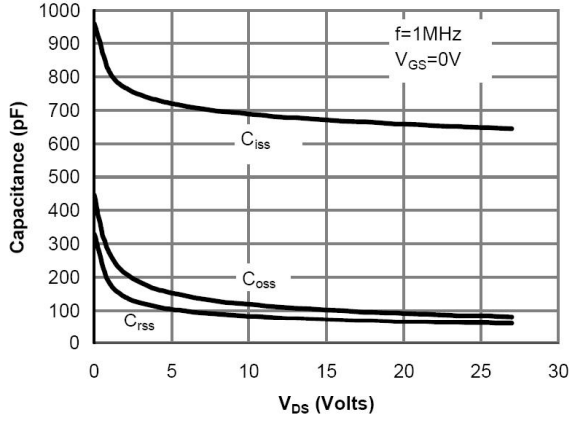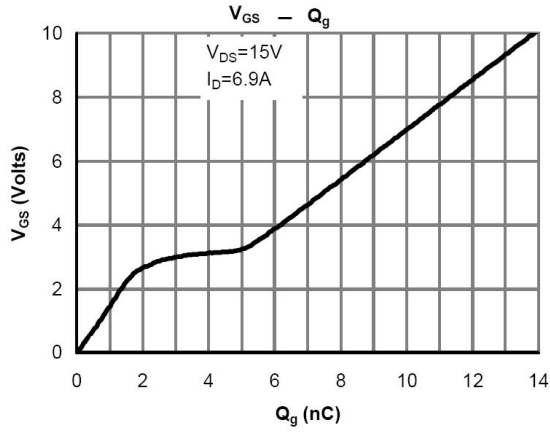






P-沟道电性能参数/P-CHANNEL Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=-250\mu A$	-30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-24V$ $V_{GS}=0V$			-1.0	μA
		$V_{DS}=-24V$ $V_{GS}=0V$ $T_J=55^\circ C$			-5.0	μA
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 12V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=-250\mu A$	-0.5	-0.7	-1.3	V
On state drain current	$I_{D(on)}$	$V_{DS}=-4.5V$ $V_{GS}=-5.0V$	6			A
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=-10V$ $I_D=-6.0A$		52	65	m Ω
		$V_{GS}=-10V$ $I_D=-6.0A$ $T_J=125^\circ C$		57	86	m Ω
		$V_{GS}=-4.5V$ $I_D=-5.0A$		59	75	m Ω
Forward Transconductance	g_{FS}	$V_{DS}=-5.0V$ $I_D=-5.0A$		12		S
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=-1.0A$		-0.76	-1.0	V
Input Capacitance	C_{iss}	$V_{DS}=-15V$ $V_{GS}=0V$ $f=1.0MHz$		920		pF
Output Capacitance	C_{oss}			190		pF
Reverse Transfer Capacitance	C_{rss}			122		pF
Gate resistance	R_g	$V_{DS}=0V$ $f=1.0MHz$ $V_{GS}=0V$		3.6		Ω
Total Gate Charge(10V)	Q_g	$V_{GS}=-10V$ $V_{DS}=-15V$ $I_D=-6.0A$		18.5		nC
Total Gate Charge(4.5V)				9.6		nC
Gate-Source Charge	Q_{gs}			2.7		nC
Gate-Drain Charge	Q_{gd}			4.5		nC
Turn-On Delay Time	$t_{d(on)}$				7.7	
Turn-On Rise Time	t_r	$V_{DS}=-15V$ $V_{GS}=-10V$ $R_L=2.7\Omega$ $R_{GEN}=3\Omega$		5.7		ns
Turn-Off Delay Time	$t_{d(off)}$			20.2		ns
Turn-Off Fall Time	t_f			9.5		ns
Body Diode Reverse Recovery Time	t_{rr}		$I_F=-6.0A$ $di/dt=100A/\mu s$		20	
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F=-6.0A$ $di/dt=100A/\mu s$		8.8		nC

P-沟道电参数曲线图 / P-CHANNEL Electrical Characteristic Curve

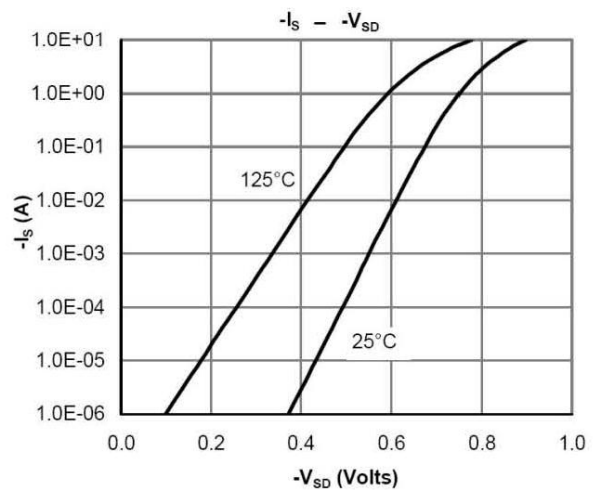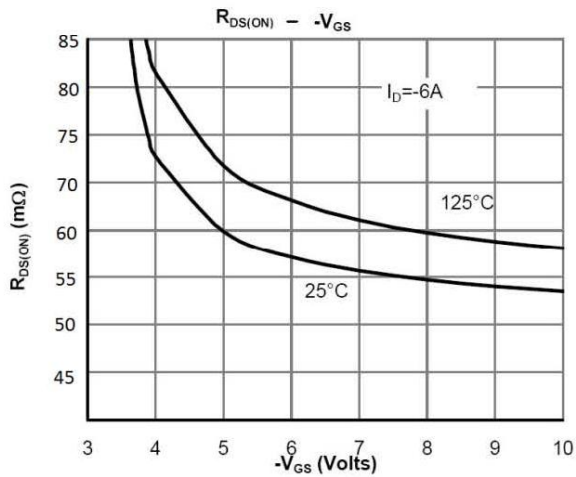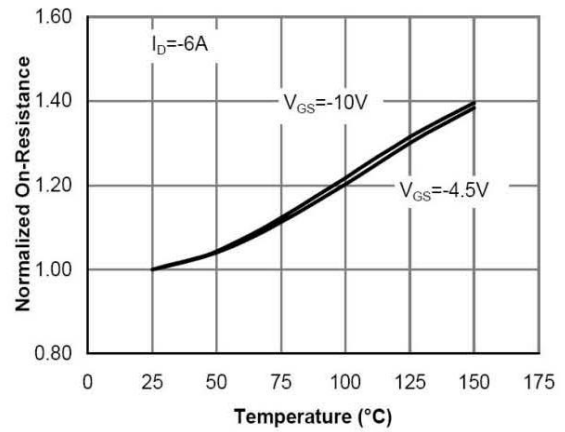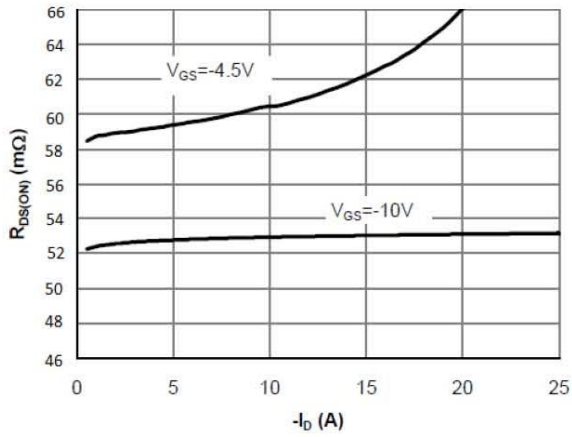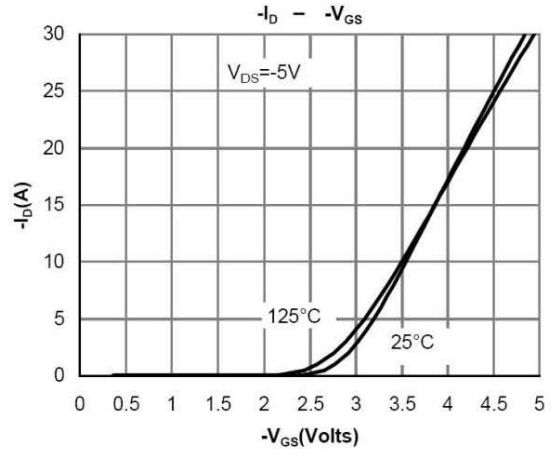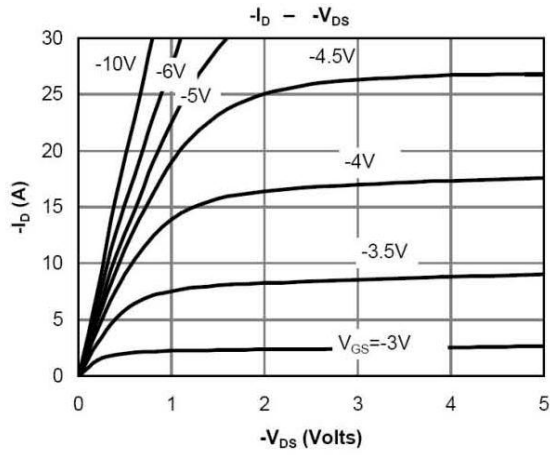


P-沟道电参数曲线图 / P-CHANNEL Electrical Characteristic Curve

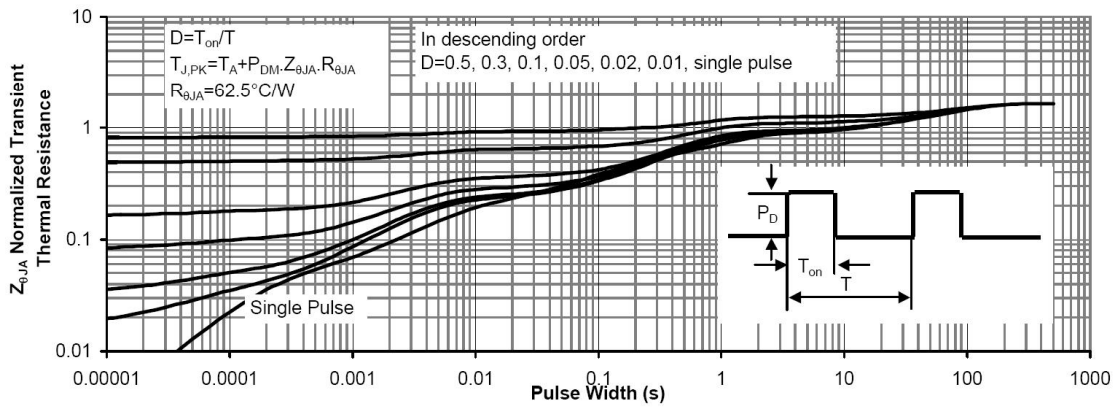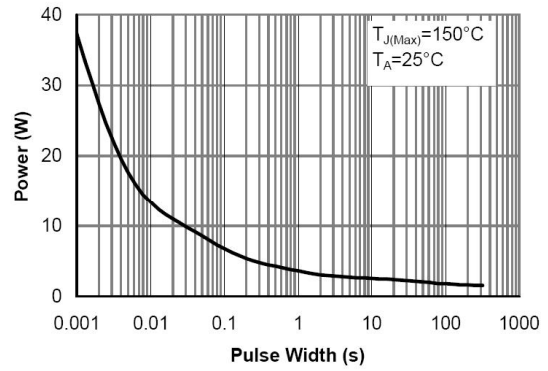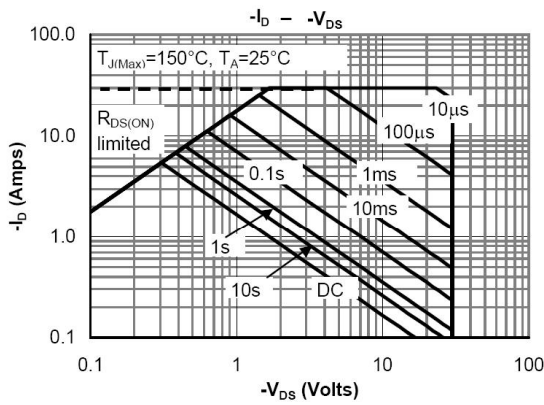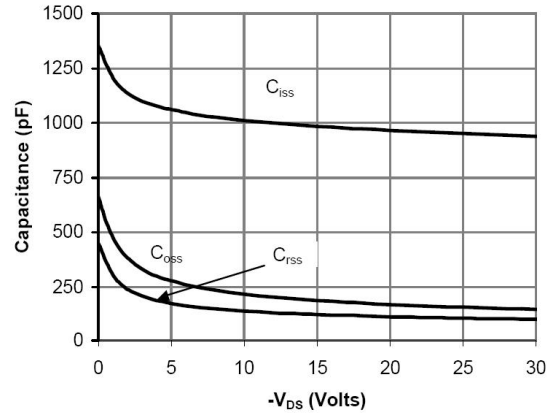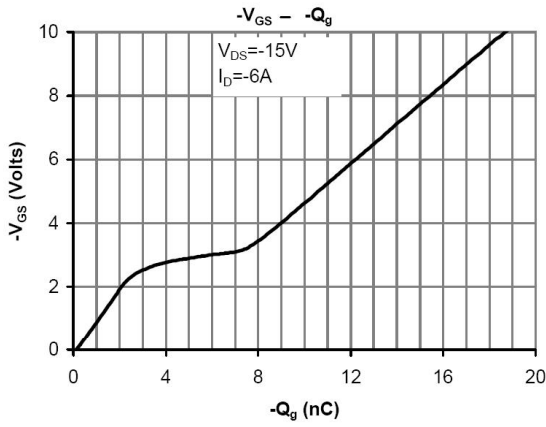


外形尺寸图 / Package Dimensions

SOP-8

Unit:mm

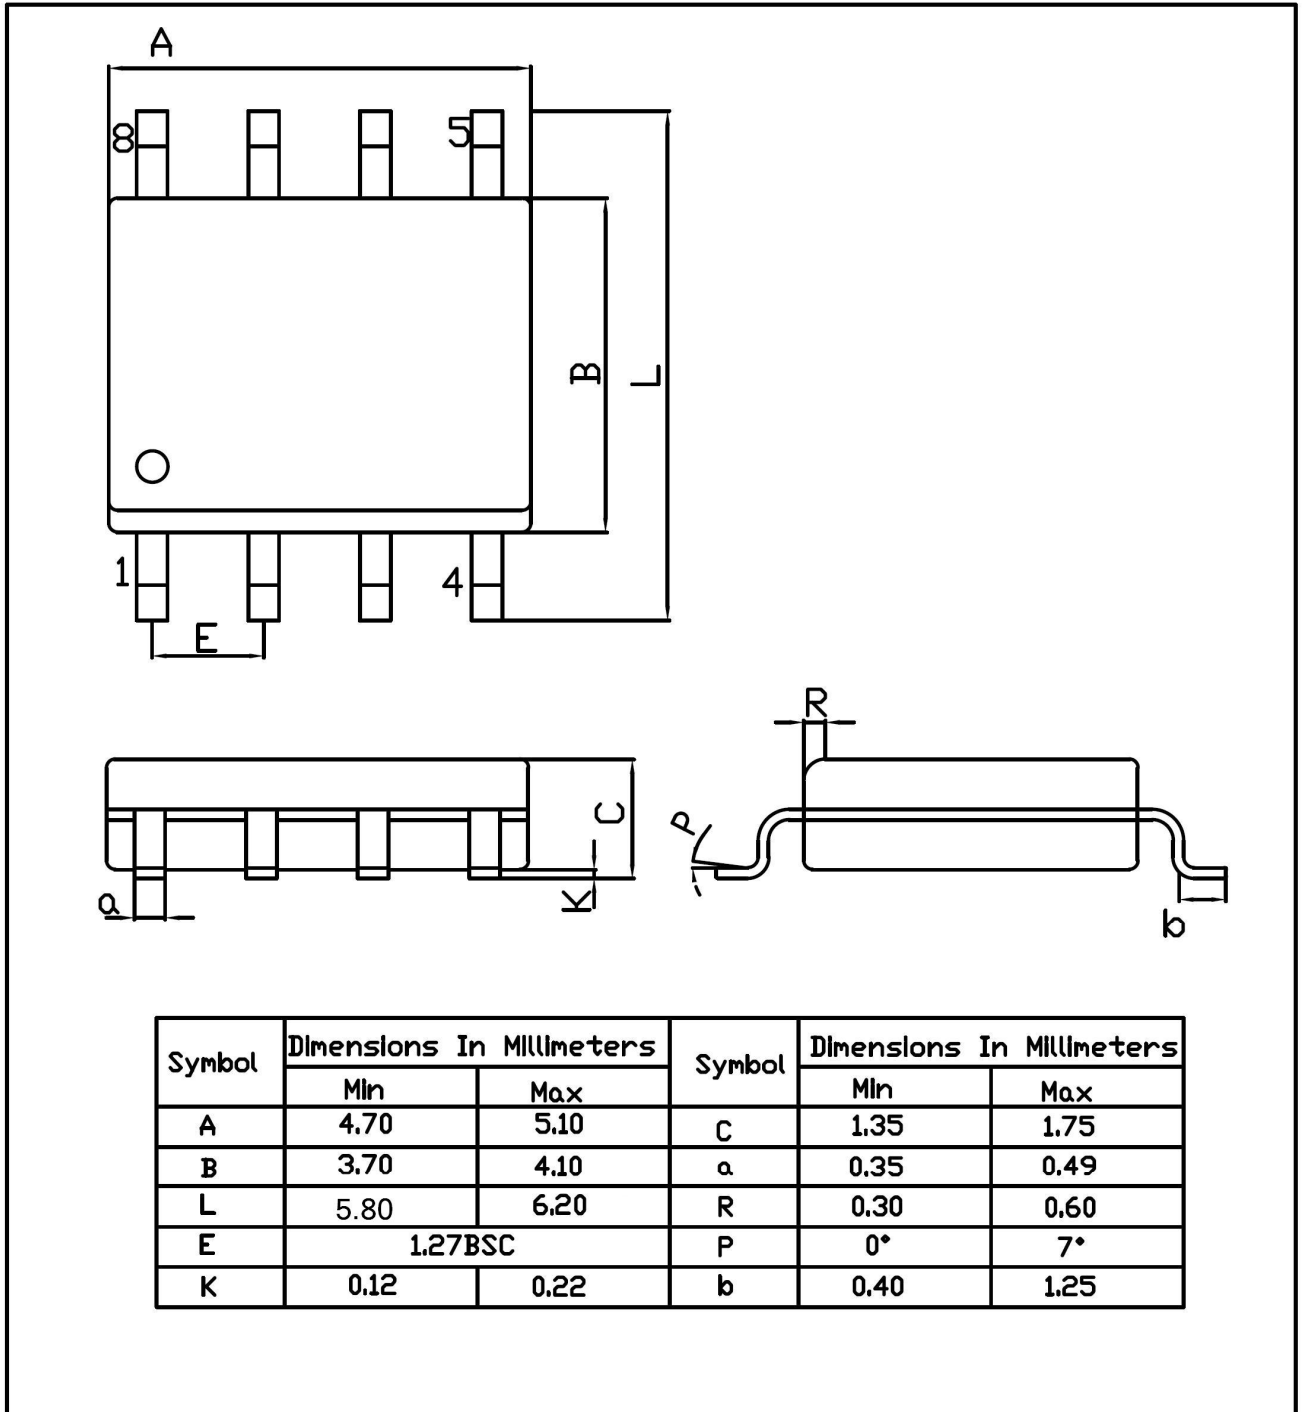

印章说明 / Marking Instructions

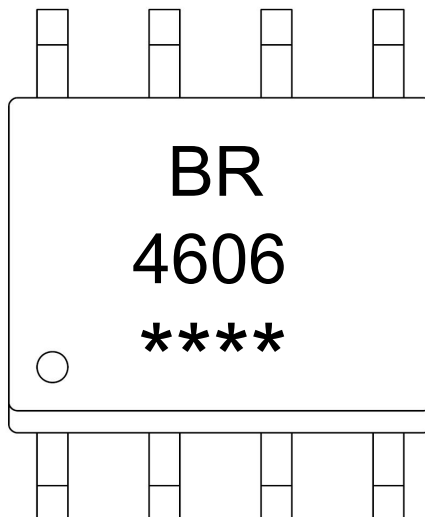

说明：

BR： 为公司代码

4606： 为型号代码

****： 为生产批号代码，随生产批号变化。


Note:

BR: Company Code.

4606: Product Type.

****: Lot No. Code, code change with Lot No.

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

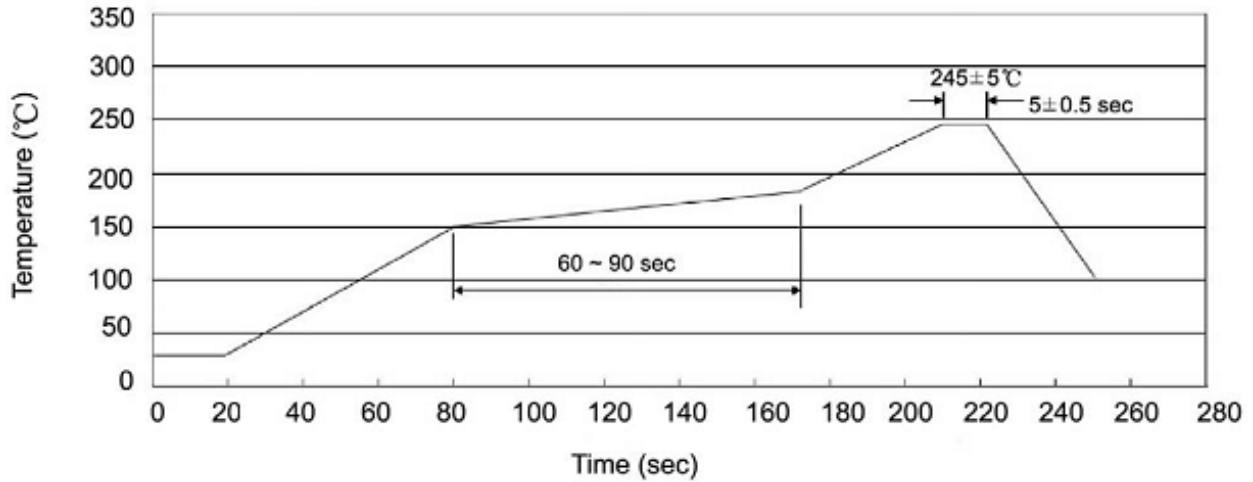

说明：

- 1、预热温度 150 ~ 180°C，时间 60 ~ 90sec；
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec；
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13" ×12	360×360×50	380×335×366

使用说明 / Notices

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Blue Rocket](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BSC884N03MS G](#) [BSF024N03LT3 G](#)
[PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-](#)
[7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#)
[SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#)
[IPS60R1K0PFD7SAKMA1](#)