


SMART BEACON

type SB2000/H -/GH

Certified product, energy efficiency, very low weight, easy to assemble

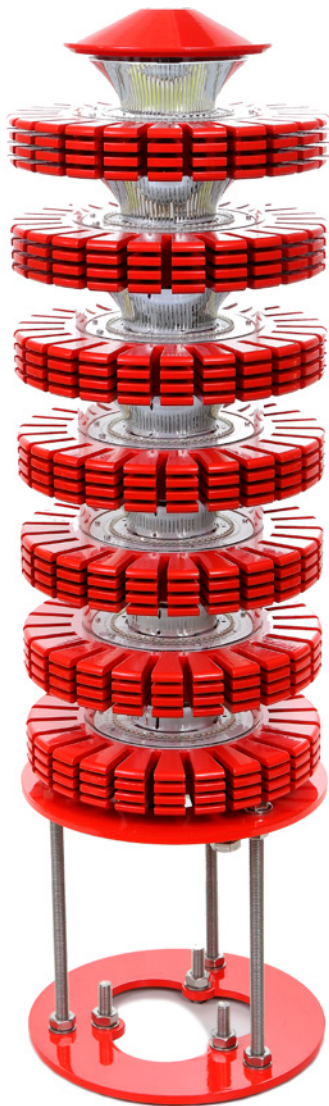

- ◆ Daylight, **360°** omnidirectional, flash mode
- ◆ Low power consumption **< 400W** (Type B according to ICAO) - for 40 fpm
- ◆ Low power consumption **< 610W** (Type A according to ICAO) - for 40 fpm
- ◆ The lamp reacts to the background luminance level by adjusting the light intensity - type B/A
- ◆ Very low lamp weight **< 14 kg** (lamp holder), **< 10 kg** (lamp controller)
- ◆ Day/night detection system, realized by means of twilight sensor or astronomical clock (controller equipment)
- ◆ Integrated lamp design (light alloys and composites) with a degree of protection of **IP65 or higher**
- ◆ Mechanical shock resistance - at least **IK08**
- ◆ Certificate of electromagnetic compatibility of the lamp power supply (EMC)
- ◆ Lifetime of active optical components - over **100 000 hours**
- ◆ Operating temperature: From -30°C to +55°C / storage temperature: From -50°C to +75°C
- ◆ Integrated overvoltage protection type TI+TII (B+C class) at the level of 40kA protecting against surges specified in the Polish standard **PN-EN 61000-4-5:2009**
- ◆ Enclosure surface protected with antioxidants layers
- ◆ 36 months warranty with the possibility of extension up to 72 months

Made
in Poland

100 000 cd
200 000 cd

46V -55V
92V-256V


VAC
VDC

< 610 W
< 840 W

< 14 kg
< 10 kg



High intensity lamp type A/B (ICAO)

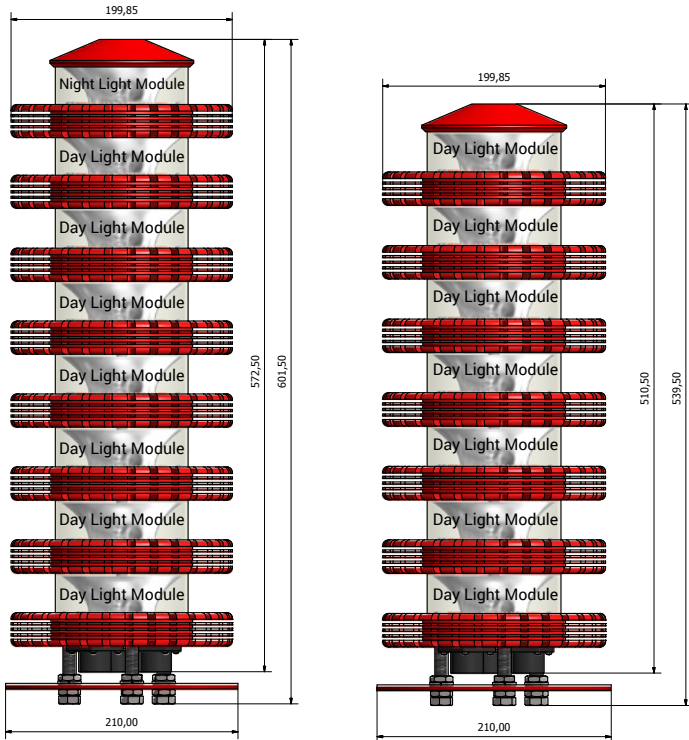

- ◆ Implement the requirements of regulations issued by the Federal Aviation Administration (**FAA**), the International Civil Aviation Organization (**ICAO**), the European Aviation Safety Agency (**EASA**)
- ◆ **Optional:** We produce obstacle lighting lamps combining the functions of both types (night obstacle marking and day obstacle marking) in one lamp.
 - **SB2000/LH** - low intensity (night) according to ICAO type A or B and high intensity (day) according to ICAO type A/B
 - **SB2000/SH** - medium intensity (night) according to ICAO type B or C and high intensity (day) according to ICAO type A/B

Electrical parameters:

Series lamp type SMART BEACON	Supply voltage	Supply voltage VAC/VDC			Average level of power consumption [W]	Type according to ICAO
		Min.	Typ.	Max.[V]		
SB2000/H-48V	48 VAC/VDC	46	48	55	< 610 W (+/-2%) for 40 fpm	A
					< 840 W (+/-2%) for 60 fpm	B
SB2000/H-230V	230 VAC/VDC	92	230	256	< 610 W (+/-2%) for 40 fpm	A
					< 840 W (+/-2%) for 60 fpm	B
SB2000/GH-48V	48 VAC/VDC	46	48	55	< 610 W (+/-2%) for 40 fpm	A
					< 840 W (+/-2%) for 60 fpm	B
SB2000/GH-230V	230 VAC/VDC	92	230	256	< 610 W (+/-2%) for 40 fpm	A
					< 840 W (+/-2%) for 60 fpm	B

200 000 cd / 100 000 cd / 20 000 cd, type A/B (flashing mode),
SB2000/GH - multi-lamp flash synchronization (GPS/GLONASS)
SB2000/H - no flash synchronization of many lamps
 fpm - flashes per minute

Made in Poland

100 000 cd
200 000 cd

46V -55V
92V-256V

VAC
VDC

< 610 W
< 840 W

< 14 kg
< 10 kg



BSSTC.PL Sp. z o.o.
marketing@bsstc.pl
+48 73 595 23 12

www.bsstc.pl | www.bsstc.de | www.bsstc.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [BLUESOFT STC](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)