

Medium intensity lamp type A (ICAO)
Medium intensity lamp type A and type B or C (ICAO)

SMART BEACON

type SB2000/W -/SW -/GW -/GSW

Certified product, energy efficiency, very low weight, easy to assemble



- ◆ Integrated overvoltage protection type TI+TII (class B+C) of 40kA protecting against impacts specified in the Polish standard **PN-EN 61000-4-5:2009**
- ◆ Operating temperature from -30°C to +55°C / storage temperature from -50°C to +75°C
- ◆ 36 months warranty with the possibility of extension up to 72 months

- ◆ Daylight, **360°** omnidirectional, flash mode, type A (SB2000/W, SB2000/GW)
- ◆ Daylight (flash mode, type A) and night light (flash mode type B or steady mode type C), omnidirectional **360°**, (SB2000/SW, SB2000/GSW)
- ◆ Low power consumption for daytime operation, up to **110 W** - type A, flash mode for 20 fpm (SB2000/W, SB2000/GW)
- ◆ Low power consumption for night operation, up to **25 W** - type B, flash mode for 20 fpm (SB2000/SW, SB2000/GSW)
- ◆ Low power consumption for night operation, up to **35 W** - type C, steady mode (SB2000/SW, SB2000/GSW)
- ◆ Light intensity **20 000 cd**, colour temperature 5700K, light colour white
- ◆ Light intensity **2 000 cd**, types B and C, light length 620 nm, light colour red
- ◆ Low lamp weight **< 2.5 kg** (SB2000/W, SB2000/GW) or **< 3.5 kg** (SB2000/SW, SB2000/GSW)
- ◆ Low lamp driver weight **< 8 kg**
- ◆ GPS/GLONASS control system, facilitating cooperation of a group of lamps working in wind turbine farms or other objects requiring synchronous operation (Equipped with SB2000/GW lamp driver).
- ◆ Day/night detection system, synchronized with dusk switch or astronomical clock (controller equipment).
- ◆ Integrated lamp design (light alloys and composites) with a degree of protection of **IP65 or higher**
- ◆ Mechanical shock resistance - **at least IK08**
- ◆ Lamp housing surface protected by layers of antioxidants
- ◆ Certificate of electromagnetic compatibility of the lamp power supply (EMC)
- ◆ Lifetime of active optics greater than **100 000 hours**

Made
in Poland

2 000 cd
20 000 cd

46V -55V
92V-256V

VAC
VDC

< 110 W (type A)
< 25 W (type B)
< 35 W (type C)

< 3,5 kg
< 8 kg




BSSTC.PL Sp. z o.o.
marketing@bsstc.pl
+48 73 595 23 12

www.bsstc.pl | www.bsstc.de | www.bsstc.com



Medium intensity lamp type A (ICAO)
Medium intensity lamp type A and type B or C (ICAO)

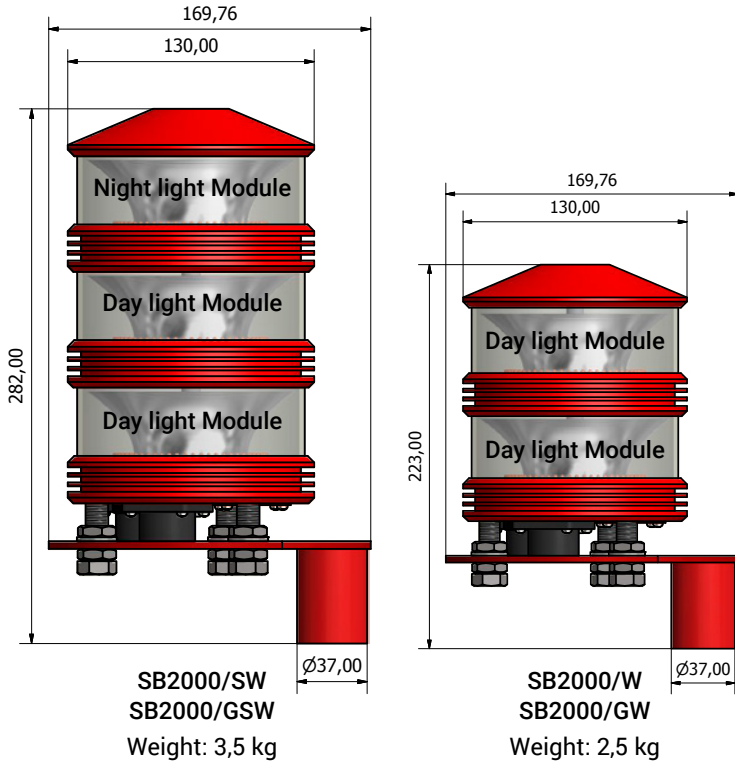

- ◆ Implement the requirements of regulations issued by the Federal Aviation Administration (**FAA**), the International Civil Aviation Organization (**ICAO**), the European Aviation Safety Agency (**EASA**)
- ◆ **Optional:** We produce obstacle lighting lamps combining the functions of both types (night obstacle marking and day obstacle marking) in one lamp.
 - **SB2000/LW** - low intensity (night) according to ICAO type B/A and medium intensity (day) according to ICAO type A
 - **SB2000/SW** - medium intensity (day and night) according to ICAO type C/A or B/A

Electrical parameters:

Series lamp type SMART BEACON	Supply voltage	Supply voltage [VAC/VDC]			Average level of power consumption [W]	Type according to ICAO
		Min.	Typ.	Max.		
SB2000/W-48V SB2000/GW-48V	48 VAC/VDC	46	48	55	< 110 W (+/-2%) for 20 fpm < 290 W (+/-2%) for 60 fpm	A
SB2000/W-230V SB2000/GW-230V	230 VAC/VDC	92	230	256	< 110 W (+/-2%) for 20 fpm < 290 W (+/-2%) for 60 fpm	A
SB2000/SW-48V SB2000/GSW-48V	48 VAC/VDC	46	48	55	< 110 W (+/-2%) for 20 fpm < 290 W (+/-2%) for 60 fpm	A
					< 25 W (+/-2%) for 20 fpm	B
					< 35 W	C
SB2000/SW-230V SB2000/GSW-230V	230 VAC/VDC	92	230	256	< 110 W (+/-2%) for 20 fpm < 290 W (+/-2%) for 60 fpm	A
					< 25 W (+/-2%) for 20 fpm	B
					< 35 W	C

20 000 cd, type A (flash operation)
 SB2000/GW - multi-lamp flash synchronization (GPS/GLONASS)
 SB2000/W - no flash synchronization of multiple lamps
 Optional: SB2000/SW, SB2000/GSW - medium intensity lamp module working at night
 Optional: 2 000cd, type C/B (steady/flash operation)
 fpm – flashes per minute

Made in Poland

2 000 cd
20 000 cd

46V -55V
92V-256V

VAC
VDC

< 110 W (type A)
< 25 W (type B)
< 35 W (type C)

< 3,5 kg
< 8 kg



BSSTC.PL Sp. z o.o.
marketing@bsstc.pl
+48 73 595 23 12

www.bsstc.pl | www.bsstc.de | www.bsstc.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [BLUESOFT STC](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)