


◆ SPECIFICATIONS

Unit:mm


- ◇ Poles: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24
- ◇ Applicable wire: AWG#28-#20
- ◇ Voltage rating: 300V DC/AC
- ◇ Current rating: 9A max
- ◇ Withstand voltage: 1500V AC
- ◇ Working Temperature: -25°C ~ +85°C
- ◇ Insulation resistance:  $\geq 1000M\Omega$
- ◇ Contact resistance:  $\leq 0.015\Omega$
- ◇ Applicable PC board thickness: 1.6mm

5569-nAW

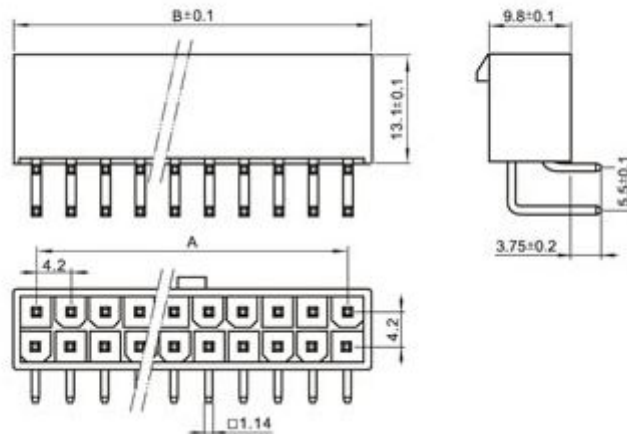

Poles	Type	Size(mm)		
		A	B	C
2	5569-2A	0	5.4	15.2
4	5569-4A	4.2	9.6	19.4
6	5569-6A	8.4	13.8	23.6
8	5569-8A	12.6	18.0	27.8
10	5569-10A	16.8	22.2	32.0
12	5569-12A	21.0	26.6	36.2
14	5569-14A	25.2	30.6	40.4
16	5569-16A	29.4	34.8	44.6
18	5569-18A	33.6	39.0	48.8
20	5569-20A	37.8	43.2	53.0
22	5569-22A	42.0	47.4	57.2
24	5569-24A	46.2	51.6	61.4

# 产品图片

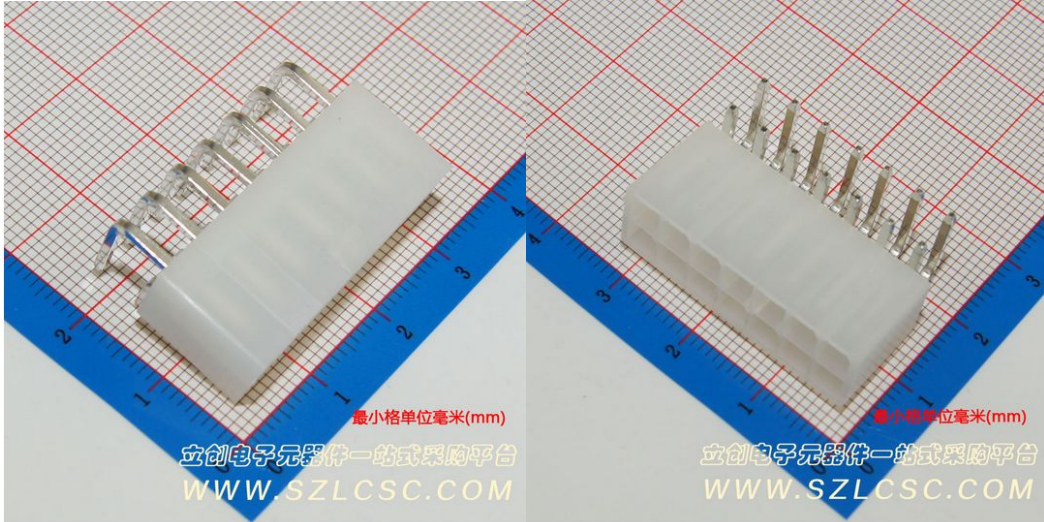

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Boom](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#) [803-43-024-10-001000](#)