

**SPECIFICATIONS**

Unit:mm

- ◇ Poles: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24
- ◇ Applicable wire: AWG#28-#20
- ◇ Voltage rating: 300V DC/AC
- ◇ Current rating: 9A max
- ◇ Withstand voltage: 1500V AC
- ◇ Working Temperature: -25°C ~ +85°C
- ◇ Insulation resistance:  $\geq 1000M\Omega$
- ◇ Contact resistance:  $\leq 0.015\Omega$
- ◇ Applicable PC board thickness: 1.6mm

UL:Recognized No.E309635  
 RoHS-specification and Halogen-free products

**TERMINAL**



Terminal is interchangeable with 5557 Terminal

**HOUSING**


Housing is interchangeable with 5557 Receptacle housing

**Mounting Measurement**

**5569-nAWD**

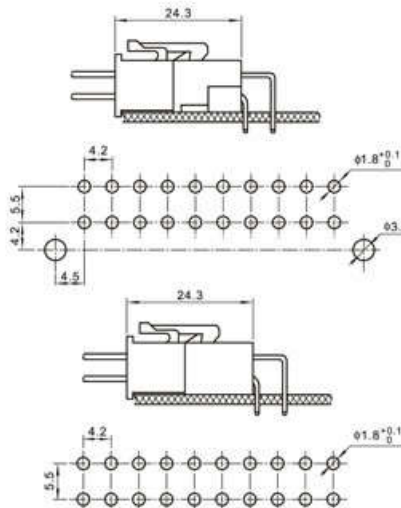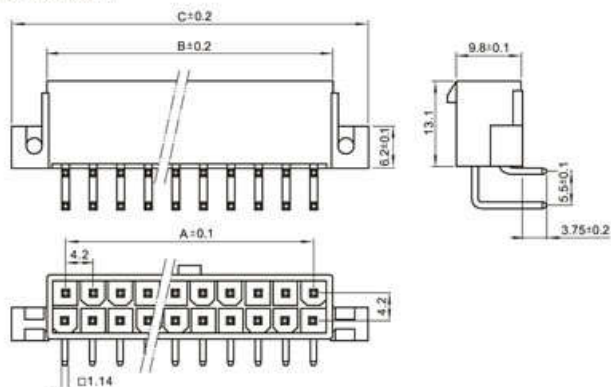

**5569-nAW**

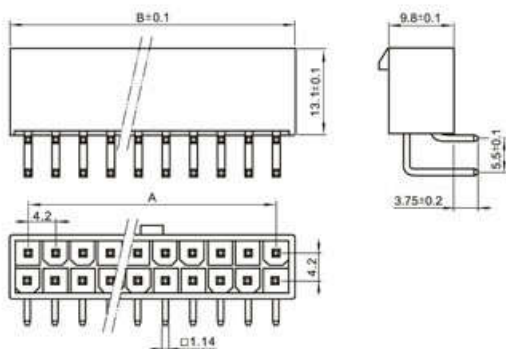

Poles	Type	Size(mm)		
		A	B	C
2	5569-2A	0	5.4	15.2
4	5569-4A	4.2	9.6	19.4
6	5569-6A	8.4	13.8	23.6
8	5569-8A	12.6	18.0	27.8
10	5569-10A	16.8	22.2	32.0
12	5569-12A	21.0	26.6	36.2
14	5569-14A	25.2	30.6	40.4
16	5569-16A	29.4	34.8	44.6
18	5569-18A	33.6	39.0	48.8
20	5569-20A	37.8	43.2	53.0
22	5569-22A	42.0	47.4	57.2
24	5569-24A	46.2	51.6	61.4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Boom](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)