



Pin#	尺寸	尺寸	尺寸
2x3	4.00	12.20	13.30
2x4	6.00	14.20	15.30
2x5	8.00	16.20	17.30
2x6	10.00	18.20	19.30
2x7	12.00	20.20	21.30
2x8	14.00	22.20	23.30
2x9	16.00	24.20	25.30
2x10	18.00	26.20	27.30
2x11	20.00	28.20	29.30
2x12	22.00	30.20	31.30
2x13	24.00	32.20	33.30
2x14	26.00	34.20	35.30
2x15	28.00	36.20	37.30
2x16	30.00	38.20	39.30
2x17	32.00	40.20	41.30
2x18	34.00	42.20	43.30
2x19	36.00	44.20	45.30
2x20	38.00	46.20	47.30
2x21	40.00	48.20	49.30
2x22	42.00	50.20	51.30
2x23	44.00	52.20	53.30
2x24	46.00	54.20	55.30
2x25	48.00	56.20	57.30
2x26	50.00	58.20	59.30
2x27	52.00	60.20	61.30
2x28	54.00	62.20	63.30
2x29	56.00	64.20	65.30
2x30	58.00	66.20	67.30
2x31	60.00	68.20	69.30
2x32	62.00	70.20	71.30
2x33	64.00	72.20	73.30
2x34	66.00	74.20	75.30

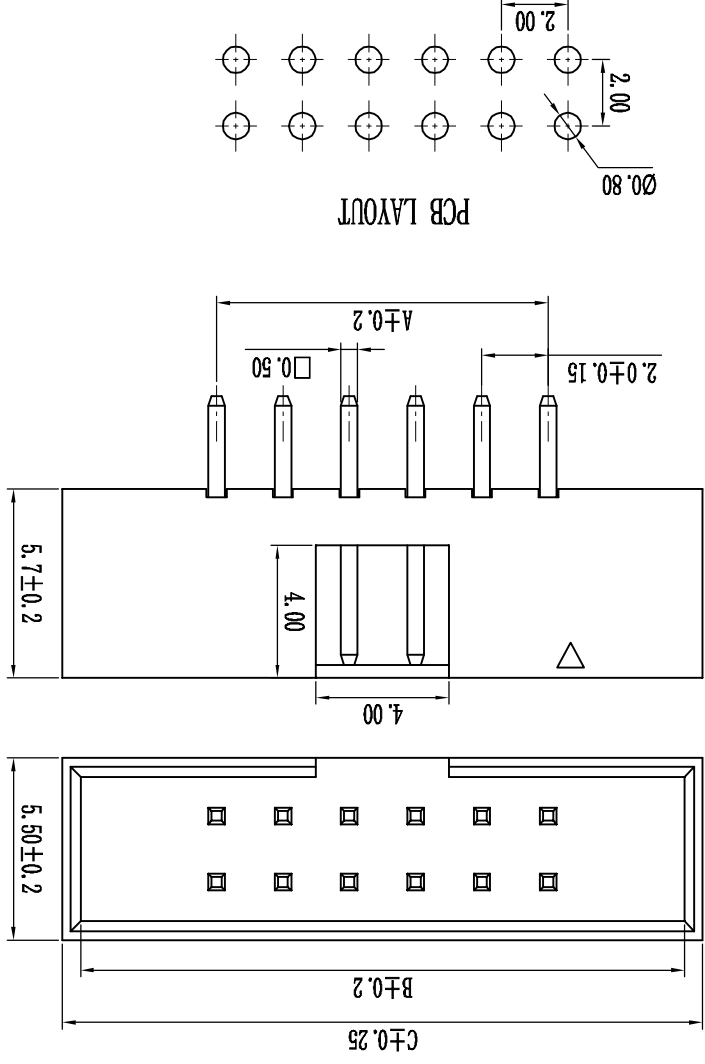

PCB LAYOUT

筒牛

筒牛	系列
间距	1-1.27mm
3-2.54mm	2-2.0mm
7.1=71mm	1.27 间距 50
7.2=72	
9.0=90	
13.1=131	


电鍍

电鍍	A-1u"
材质	A-PBT
S=180°	B-PA46
角度	R=90°
耐电压	M-SMT
绝缘材料	D-PA9T
E-LCP	Y-剥破压线

颜色

颜色	B=Black
流水号	G=Grey
常用规格	R=Red
0=常用规格	U=Blue
1=	Y=Yellow
2=	W=White

技术规范：1.5AMP
 额定电流：
 适用温度：-40°Cto+105°C
 接触电阻：20mΩ Max
 绝缘电阻：1000MΩ Min
 耐电压：AC500V
 绝缘材料：Polyester (UL94V-0)
 Standard:PA-6T
 端子材质：Brass
 电镀规范：Au or Sn Over 50u" Ni

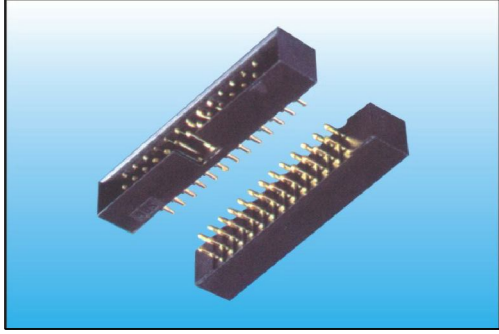

变更单号	变更日期	变更标记	变更日期	变更人	审核	批准	未标公差	比例	单位	m m	页数	1 OF 1	A0
							.XX	±0.05	批准	日期	2.0间距筒牛, 180°, 塑高5.7mm	Spec: 2.0mm Box Header, Straight Positions: 6*68	Plastic Height: 5.7mm
							.X	±0.15	审核	日期			
							X	±0.25	设计	日期			
							角度	±2°					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Boom](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)