


◆ SPECIFICATIONS

Unit:mm


- ◇ Poles: 2~24
- ◇ Applicable wire: AWG#28-#20
- ◇ Voltage rating: 300V DC/AC
- ◇ Current rating: 9A
- ◇ Withstand voltage: 1500V AC
- ◇ Working Temperature: -25°C ~ +85°C
- ◇ Insulation resistance:  $\geq 1000M\Omega$
- ◇ Contact resistance:  $\leq 0.015\Omega$
- ◇ Applicable PC board thickness: 1.6mm

**5559-nP**

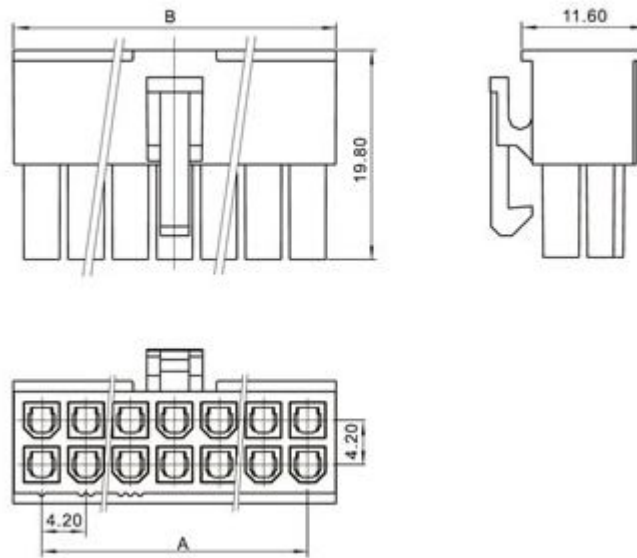

Poles	Type	Size(mm)	
		A	B
2x1	5559-2P	0	5.60
2x2	5559-4P	4.20	9.80
2x3	5559-6P	8.40	14.00
2x4	5559-8P	12.60	18.20
2x5	5559-10P	16.80	22.40
2x6	5559-12P	21.00	26.60
2x7	5559-14P	25.20	30.80
2x8	5559-16P	29.40	35.00
2x9	5559-18P	33.60	39.20
2x10	5559-20P	37.80	43.40
2x11	5559-22P	42.00	47.60
2x12	5559-24P	46.20	51.80

# 产品图片

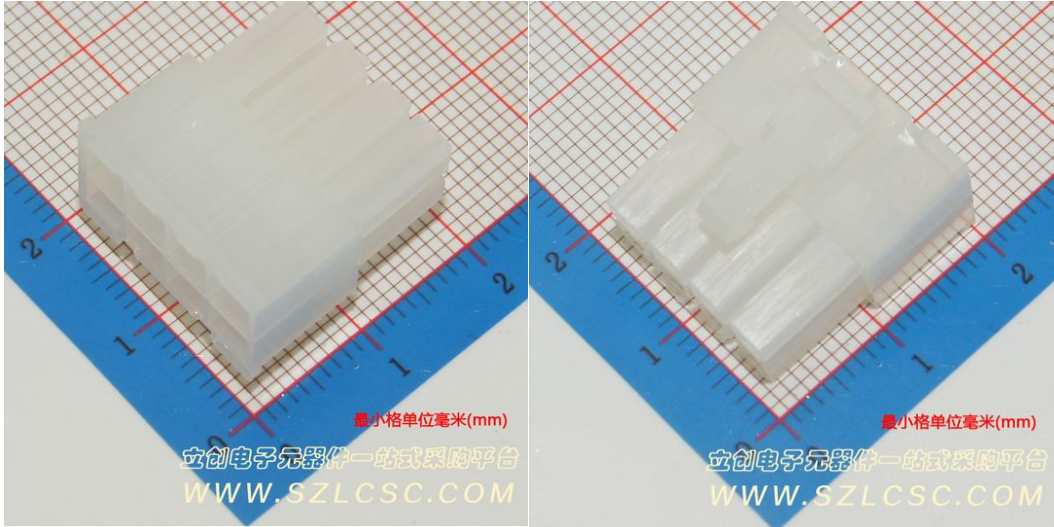

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Boom](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)