


◆ SPECIFICATIONS

Unit:mm


- ◇ Poles: 2-6、8、10、12、14、16、18、20、22、24
- ◇ Applicable wire: AWG#28-#20
- ◇ Voltage rating: 300V DC/AC
- ◇ Current rating: 9A max
- ◇ Withstand voltage: 1500V AC
- ◇ Working Temperature: -25°C ~ +85°C
- ◇ Insulation resistance:  $\geq 1000M\Omega$
- ◇ Contact resistance:  $\leq 0.015\Omega$
- ◇ Applicable PC board thickness: 1.6mm

5566-nA

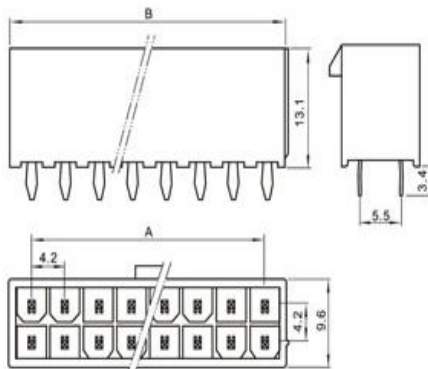

Poles	Type Vertical (90° )		Size(mm)	
			A	B
2	5566-2A	5569-2A	0	5.4
3	5566-3A	——	8.4	13.8
4	5566-4A	5569-4A	4.2	9.6
5	5566-5A	——	16.8	22.2
6	5566-6A	5569-6A	8.4	13.8
8	5566-8A	5569-8A	12.6	18.0
10	5566-10A	5569-10A	16.8	22.2
12	5566-12A	5569-12A	21.0	26.6
14	5566-14A	5569-14A	25.2	30.6
16	5566-16A	5569-16A	29.4	34.8
18	5566-18A	5569-18A	33.6	39.0
20	5566-20A	5569-20A	37.8	43.2
22	5566-22A	5569-22A	42.0	47.4
24	5566-24A	5569-24A	46.2	51.6

产品图片

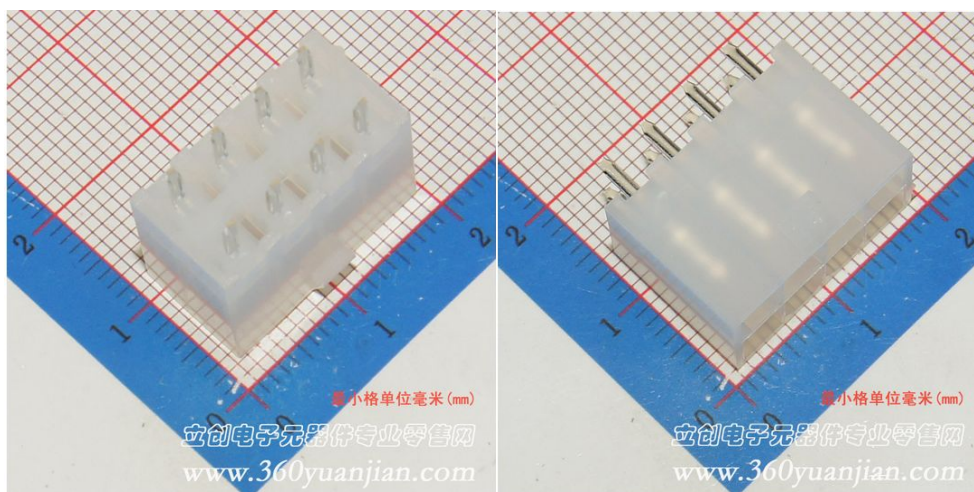

最小格单位毫米 (mm)  
立创电子元器件专业零售网  
www.360yuanjian.com

最小格单位毫米 (mm)  
立创电子元器件专业零售网  
www.360yuanjian.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Boom](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)