
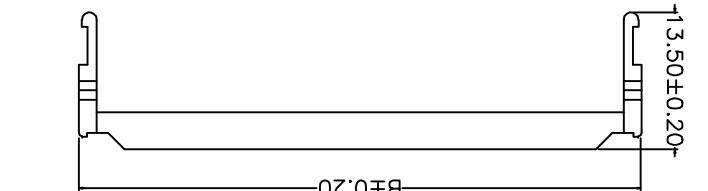
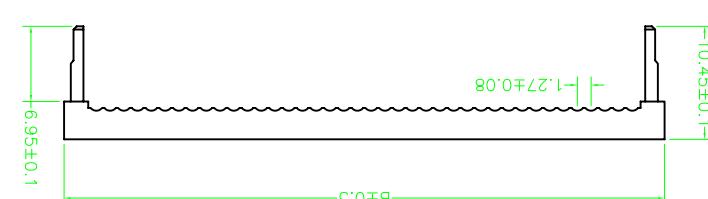

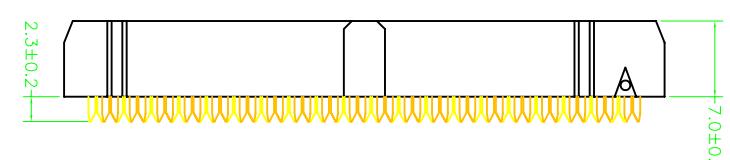


1 2 3 4 5 6

UNLESS TOLERANCE	DRAW BY	YUAN
GENERAL ANGLE	DESIGN BY	YUAN
X. ± 0.30	X. ± 3.0	ANGLE
X. ± 0.20	X. ± 2.0	DESIGN BY
X. ± 0.15	X. ± 1.0	DRAW
XXX ± 0.08	XXX ± 0.5	APPROVE BY
XXX ± 0.08	XXX ± 0.5	SCALE SHEET UNIT
		1:1 1/1 MM DRW NO: FC-XP REV: A

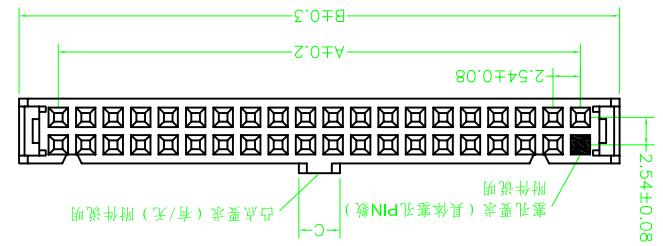

MATERIAL & FINISH
Insulator: PBT Glass Fiber(UL94V-0)
Contact : Brass
Contact : Gold-Plated Over Nickel.
Current Rating : 1A AC,DC
Voltage Rating : 250V AC,DC
Temperature Range: -40°C To +105°C
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Min
Voltage Rating : 250V AC,DC
Current Rating : 1A AC,DC
SPECIFICATIONS
Contact : Gold-Plated Over Nickel.
Current Rating : 1A AC,DC
Voltage Rating : 250V AC,DC
Temperature Range: -40°C To +105°C
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Min

REV.	DESCRIPTION	DATE
A	RELEASE	2007.3.18

1 2 3 4 5 6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for boom manufacturer:

Other Similar products are found below :

[ECC9097EU](#) [ECC9133EU](#) [1.25T-1-15AW](#) [ECC27110EU](#) [ECC576162EU](#) [ECC691121EU](#) [ECC29356EU](#) [ECC18191EU](#) [ECC50061EU](#)
[ECC41718EU](#) [ECC27322EU](#) [PHB-2*5AWD](#) [ECC56602EU](#) [ECC45938EU](#) [30042x8AW](#) [ECC49124EU](#) [ECC38402EU](#) [PHB-2*6AWD](#) [1.5-10Y](#) [ECC31636EU](#) [1.0-3Y](#) [ECC782016EU](#) [1.25T-1-15Y](#) [1.25T-9PTB](#) [ECC20043EU](#) [ECC28300EU](#) [2.54mm 2x40TW](#) [ECC66560EU](#)
[ECC55267EU](#) [ECC18270EU](#) [ECC21851EU](#) [ECC20696EU](#) [ECC319456EU](#) [ECC49906EU](#) [ECC55376EU](#) [ECC192622EU](#) [ECC9131EU](#)
[ECC32370EU](#) [ECC194423EU](#) [ECC492889EU](#) [1.5-3A](#) [PH-13A](#) [1.25T-1-5AW](#) [PHB-2*11A](#) [ECC55360EU](#) [ECC51557EU](#) [ECC66381EU](#)
[PHD2.0-2*3AW](#) [ECC12113EU](#) [ECC159738EU](#)