

博穆电子有限公司

BOMU ELECTRONICS CO., LTD

PH 条形连接器 (2.00mm)

技术参数 TECHNICAL PARAMETER

间距(PITCH):2.00mm

极数(Poles):2--12

适用基板厚度(Applicable PC board thickness):1.6mm

额定电流(Current rating):5A,AC,DC

额定电压(Voltage rating):250V,AC,DC

工作温度(Working Temperature):-25℃~+85℃

耐压值(Withstand voltage):1500V,AC/min


接触电阻(Contact resistance): $\leq 0.01 \Omega$

绝缘电阻(Insulation resistance): $\geq 1000M \Omega$

极数 Poles	编号 Part Number		尺寸 Dimensions(mm)	
			A	B
2	PH-2A	PH-2AW	2.0	6
3	PH-3A	PH-3AW	4	8
4	PH-4A	PH-4AW	6	10
5	PH-5A	PH-5AW	8	12
6	PH-6A	PH-6AW	10	14
7	PH-7A	PH-7AW	12	16
8	PH-8A	PH-8AW	14	18
9	PH-9A	PH-9AW	16	20
10	PH-10A	PH-10AW	18	22
11	PH-11A	PH-11AW	20	24
12	PH-12A	PH-12AW	22	26

材料 MATERIAL

基座(HOUSING):尼龙66UL94V-0(NYLON66 UL94V-0)
插针(PIN):黄铜(BRASS)表面镀纯锡(PURE TIN-PLATED)

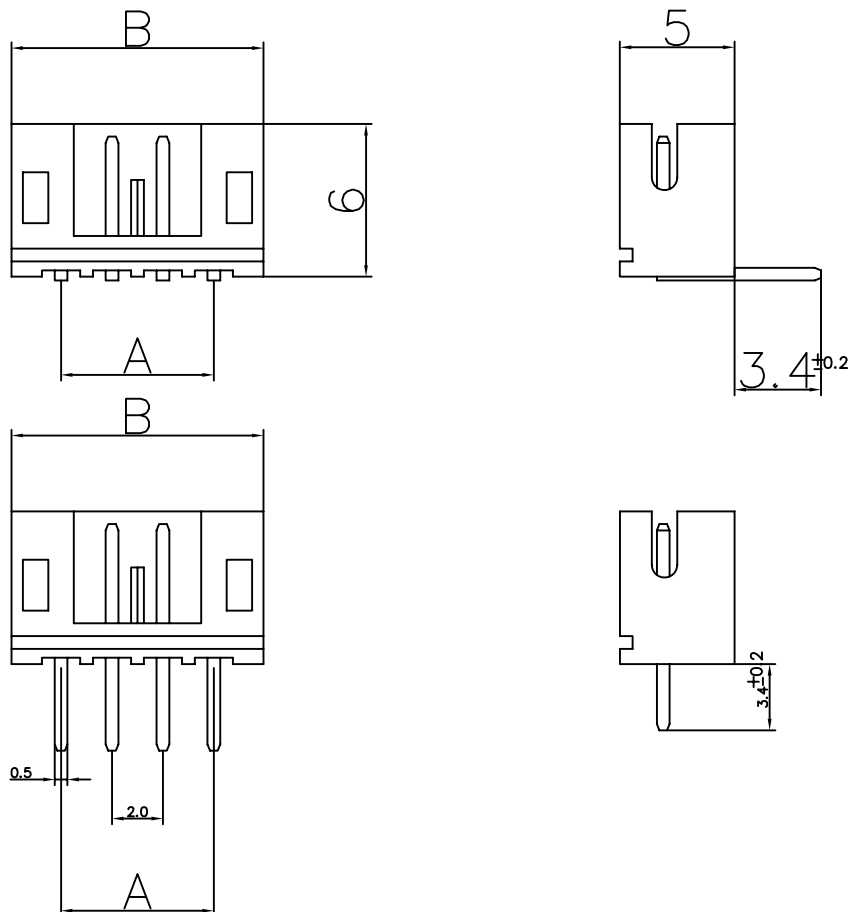

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Boom](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#)
[70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [800-90-001-10-001000](#)
[801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#)
[8-1437020-4](#)