

# PH 条形连接器 (2.00mm)

## 技术参数 TECHNICAL PARAMETER

间距(PITCH):2.00mm

极数(Poles):2--12

适用基板厚度(Applicable PC board thickness):1.6mm

额定电流(Current rating):2A,AC,DC

额定电压(Voltage rating):250V,AC,DC

工作温度(Working Temperature):-25℃~+85℃

耐压值(Withstand voltage ):1500V,AC/min


接触电阻(Contact resistance): $\leq 0.01 \Omega$

绝缘电阻(Insulation resistance): $\geq 1000M \Omega$

极数 Poles	编号 Part Number		尺寸 Dimensions(mm)	
			A	B
2	PH-2A	PH-2AW	2.0	6
3	PH-3A	PH-3AW	4	8
4	PH-4A	PH-4AW	6	10
5	PH-5A	PH-5AW	8	12
6	PH-6A	PH-6AW	10	14
7	PH-7A	PH-7AW	12	16
8	PH-8A	PH-8AW	14	18
9	PH-9A	PH-9AW	16	20
10	PH-10A	PH-10AW	18	22
11	PH-11A	PH-11AW	20	24
12	PH-12A	PH-12AW	22	26

## 材料 MATERIAL

基座(HOUSING):尼龙66UL94V-0(NYLON66 UL94V-0)  
插针(PIN):黄铜(BRASS)表面镀纯锡(PURE TIN-PLATED)

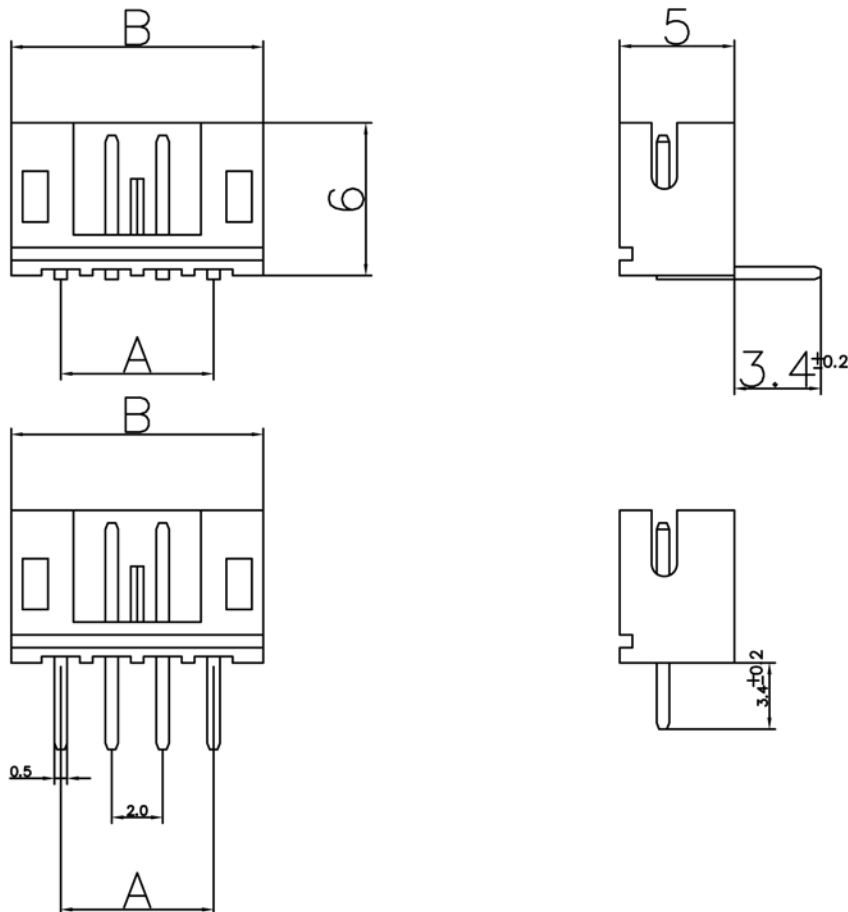

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Boom](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)