

PH 条形连接器 (2.00mm)

技术参数 TECHNICAL PARAMETER

间距(PITCH):2.00mm

极数(Poles):2--12

适用基板厚度(Applicable PC board thickness):1.6mm

额定电流(Current rating):2A,AC,DC

额定电压(Voltage rating):250V,AC,DC

工作温度(Working Temperature):-25℃~+85℃

耐压值(Withstand voltage):1500V,AC/min


接触电阻(Contact resistance): $\leq 0.01 \Omega$

绝缘电阻(Insulation resistance): $\geq 1000M \Omega$

| 极数 Poles | 编号 Part Number | | 尺寸 Dimensions(mm) | |
|-------------|-------------------|---------|-------------------|----|
| | | | A | B |
| 2 | PH-2A | PH-2AW | 2.0 | 6 |
| 3 | PH-3A | PH-3AW | 4 | 8 |
| 4 | PH-4A | PH-4AW | 6 | 10 |
| 5 | PH-5A | PH-5AW | 8 | 12 |
| 6 | PH-6A | PH-6AW | 10 | 14 |
| 7 | PH-7A | PH-7AW | 12 | 16 |
| 8 | PH-8A | PH-8AW | 14 | 18 |
| 9 | PH-9A | PH-9AW | 16 | 20 |
| 10 | PH-10A | PH-10AW | 18 | 22 |
| 11 | PH-11A | PH-11AW | 20 | 24 |
| 12 | PH-12A | PH-12AW | 22 | 26 |

材料 MATERIAL

基座(HOUSING):尼龙66UL94V-0(NYLON66 UL94V-0)
插针(PIN):黄铜(BRASS)表面镀纯锡(PURE TIN-PLATED)

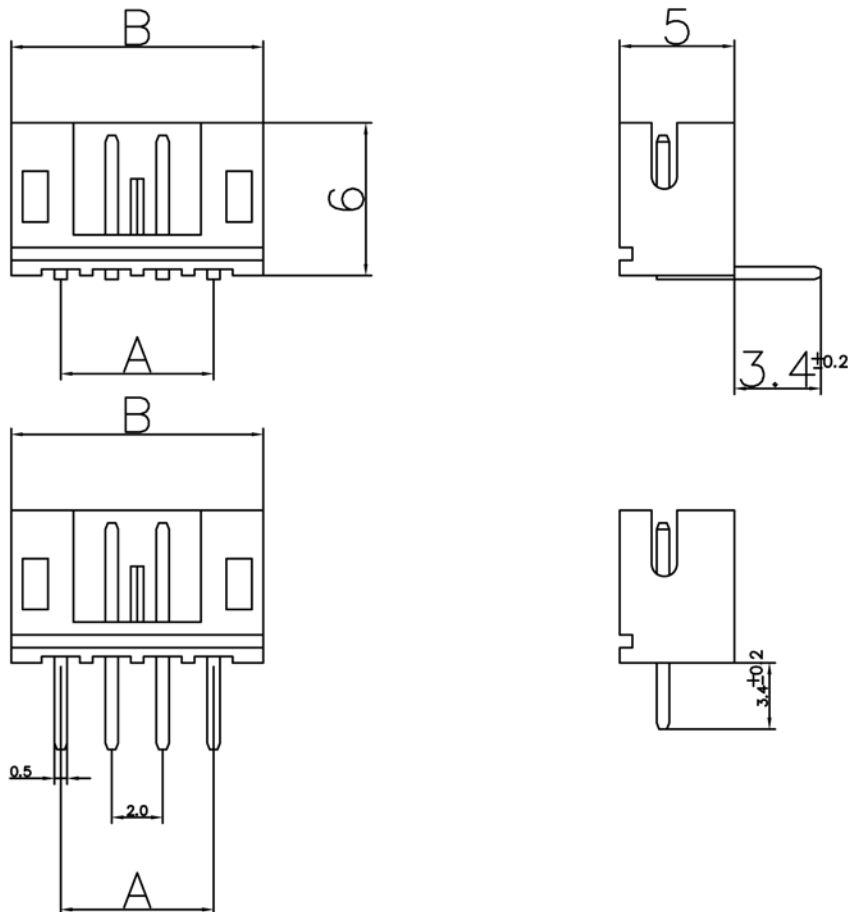

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Boom](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)