
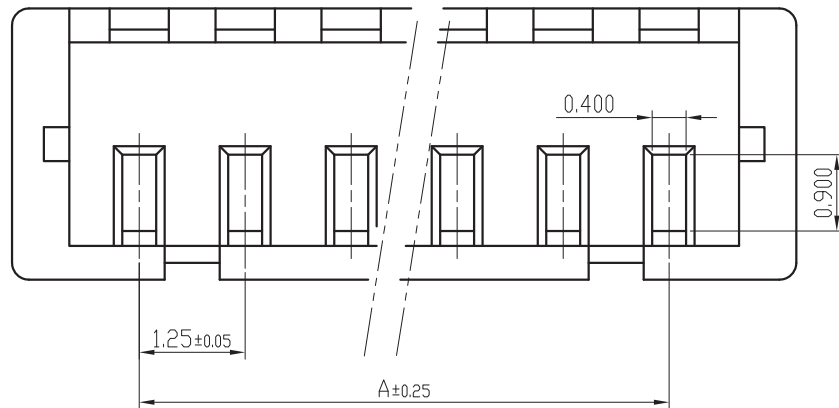
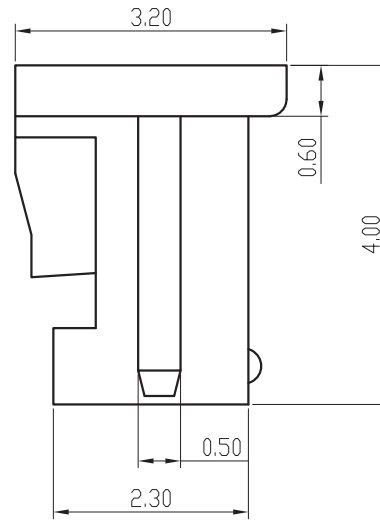
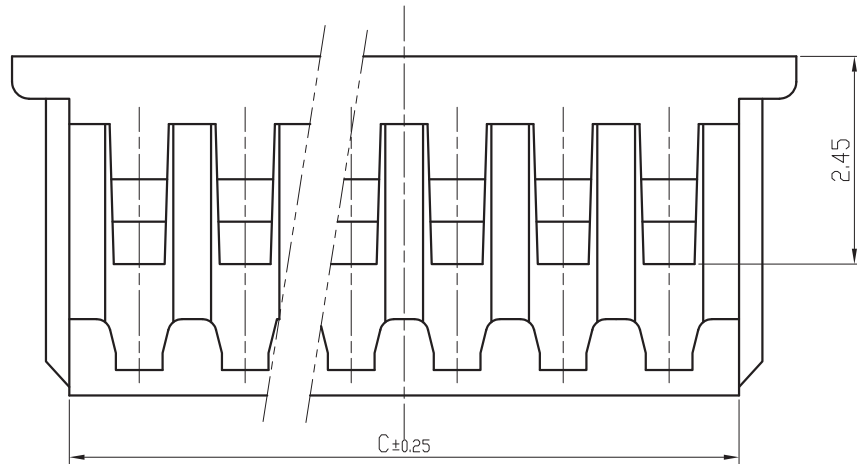
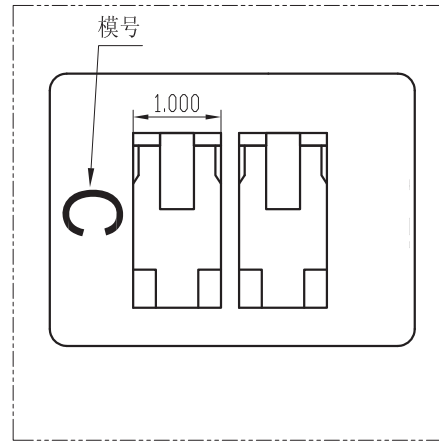


| 标记 MARK. | 更改内容 MODIFICATION | 日期 DATE | 修改 DRAW | 核准 APPROVE |
|-------------|----------------------|------------|------------|---------------|
| | | | | |
| | | | | |

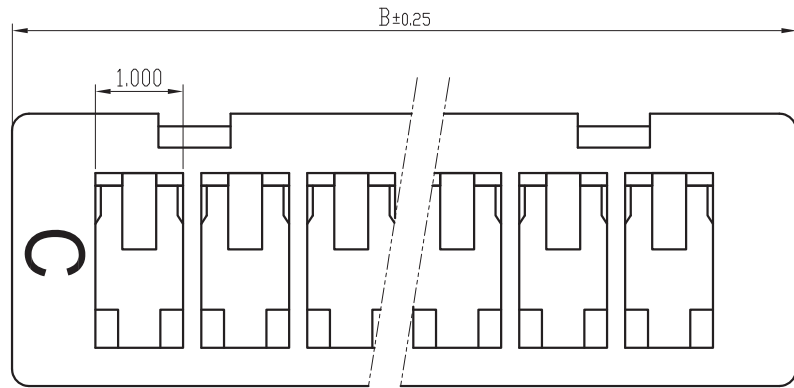

技术要求Specification:

- 1、材质Material: PA66 UL94V-0;
- 2、额定电流 Current rating:1.0A AC,DC
- 3、额定电压 Voltage rating: 50V AC,DC
- 4、温度范围 Temperature range:-25℃to+85℃
- 5、接触电阻 Contact resistance:≤20mΩ
- 6、绝缘电阻 Insulation resistance:≥100MΩ
- 7、耐压 Withstand voltage:250V AC/minute
- 8、塑件表面平整光洁,无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。

Plastic surface smooth and clean, no obvious burrs, bubbles, distortion, gate strain, lack of material and other undesirable phenomena.

| 线数 | | | 尺寸 | | |
|----|-------------|-------------|-------|-------|-------|
| | A | B | C | | |
| 2 | SH12500-2Y | SH12501-2Y | 1.25 | 4.30 | 3.00 |
| 3 | SH12500-3Y | SH12501-3Y | 2.50 | 5.55 | 4.25 |
| 4 | SH12500-4Y | SH12501-4Y | 3.75 | 6.80 | 5.50 |
| 5 | SH12500-5Y | SH12501-5Y | 5.00 | 8.05 | 6.75 |
| 6 | SH12500-6Y | SH12501-6Y | 6.25 | 9.30 | 8.00 |
| 7 | SH12500-7Y | SH12501-7Y | 7.50 | 10.55 | 9.25 |
| 8 | SH12500-8Y | SH12501-8Y | 8.75 | 11.80 | 10.50 |
| 9 | SH12500-9Y | SH12501-9Y | 10.00 | 13.05 | 11.75 |
| 10 | SH12500-10Y | SH12501-10Y | 11.25 | 14.30 | 13.00 |
| 11 | SH12500-11Y | SH12501-11Y | 12.50 | 15.55 | 14.25 |
| 12 | SH12500-12Y | SH12501-12Y | 13.75 | 16.80 | 15.50 |
| 13 | SH12500-13Y | SH12501-13Y | 15.00 | 18.05 | 16.75 |
| 14 | SH12500-14Y | SH12501-14Y | 16.25 | 19.30 | 18.00 |
| 15 | SH12500-15Y | SH12501-15Y | 17.50 | 20.55 | 19.25 |
| 16 | SH12500-16Y | SH12501-16Y | 18.75 | 21.80 | 20.50 |

| | | | | | | | |
|--------------------------------------|---------|--------------------|------------------------------|----|----------------|----|-----|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | *: Inspection Item | | | | | |
| .X±0.30 | X.° ±1° | (NO.) | :Cp/Cpk and SPC Control Item | | | | |
| .XX±0.2 | .X° ± | 材料 | PA66 | 名称 | MX1.25胶壳-8Pin | | |
| .XXX±0.10 | .XX° ± | 料厚 | | 编号 | BX-MX1.25-8PJk | 单位 | m m |
| 制图 | | 料宽 | | 比例 | 1:1 | 版本 | A |
| 审核 | | 日期 | | 角法 | | | 规格书 |
| 批准 | | 日期 | | 角法 | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Bossie](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)