


BC807

PNP Plastic-Encapsulate Transistor


Features

- $V_{CE} = -45V$
- $I_C = -0.5A$
- $f_T = 100MHz$ @ $V_{CE} = -5V, I_C = -10mA, f = 100MHz$
- General power amplifier and switching applications.
- High I_C , complementary pair with BC817.

Package

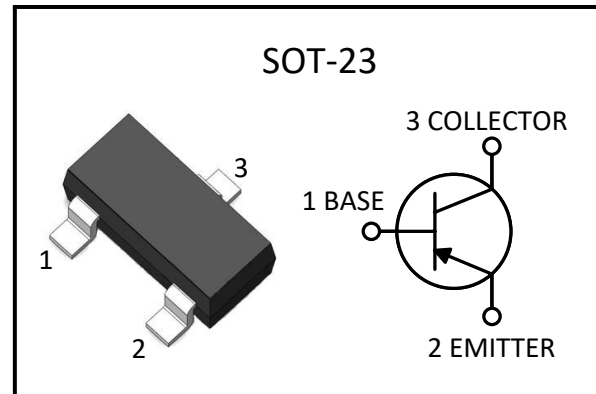

Marking

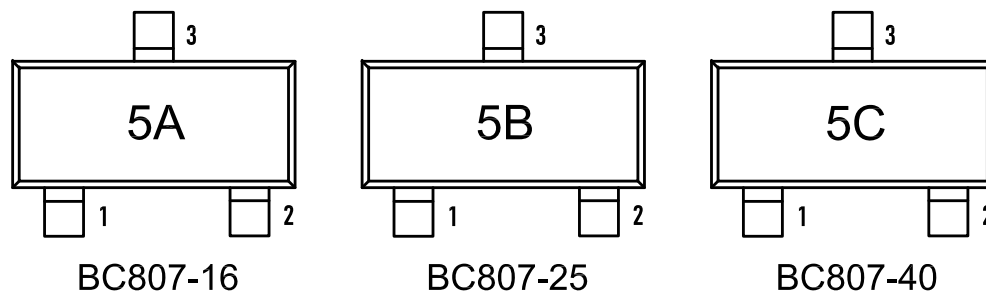

Ordering information

Order code	Package	Marking	Base qty	h_{FE}
BC807-16	SOT-23	5A	3K	100~250
BC807-25	SOT-23	5B	3K	160~400
BC807-40	SOT-23	5C	3K	250~600

Absolute Maximum Ratings @ $T_A = 25^\circ C$ unless otherwise noted

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-50	V
V_{CEO}	Collector-Emitter Voltage	-45	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-0.5	A
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	400	$^\circ C/W$
T_J, T_{stg}	Operation Junction And Storage Temperature Range	-55 to + 150	$^\circ C$



BC807

PNP Plastic-Encapsulate Transistor

Electrical Characteristics ($T_A=+25^{\circ}\text{C}$, unless otherwise specified)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-10\mu\text{A}, I_E=0$	-50	-	-	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-10\text{mA}, I_B=0$	-45	-	-	
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=-1\mu\text{A}, I_C=0$	-5	-	-	
I_{CBO}	Collector cut-off current	$V_{CB}=-45\text{V}, I_E=0$	-	-	-0.1	uA
I_{EBO}	Emitter cut-off current	$V_{EB}=-4\text{V}, I_C=0$	-	-	-0.1	
$h_{FE(1)}$	DC current gain	$V_{CE}=-1\text{V}, I_C=-100\text{mA}$	100	-	600	
$h_{FE(2)}$	DC current gain	$V_{CE}=-1\text{V}, I_C=-500\text{mA}$	40	-	-	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-	-0.7	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-	-1.2	
f_T	Transition frequency	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=100\text{MHZ}$	100	-	-	MHZ
$h_{FE}\text{Rank}$	BC807-16(120~200)	BC807-25(160~400)	BC807-40(250~600)			



BC807

PNP Plastic-Encapsulate Transistor

Typical Performance Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise noted)

Figure 1 : Static Characteristic

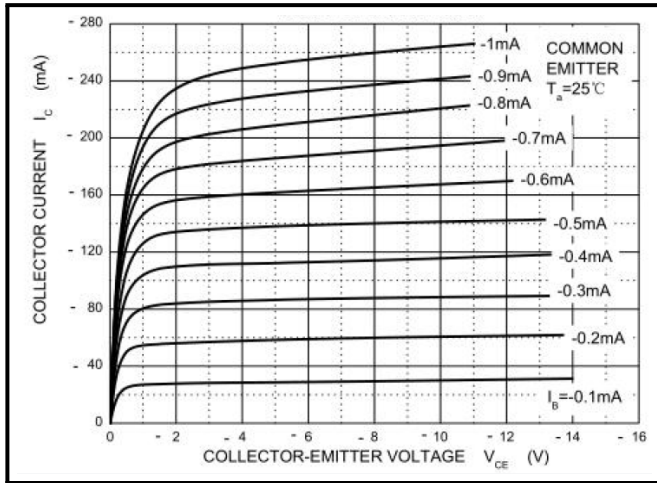


Figure 2 : $h_{FE}-I_c$

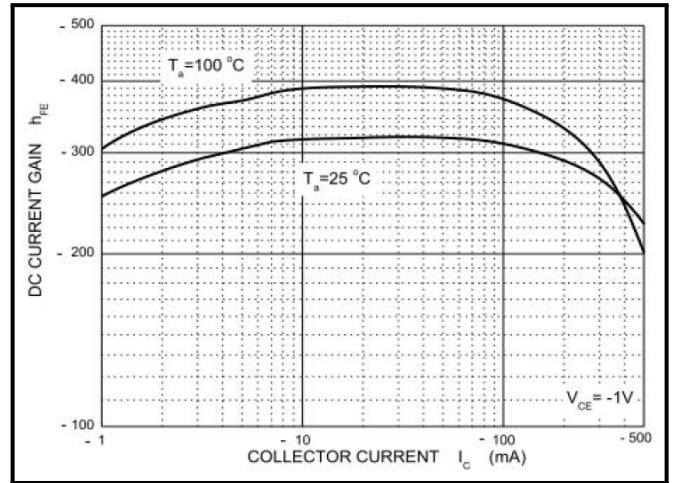


Figure 3 : $V_{BEsat}-I_c$


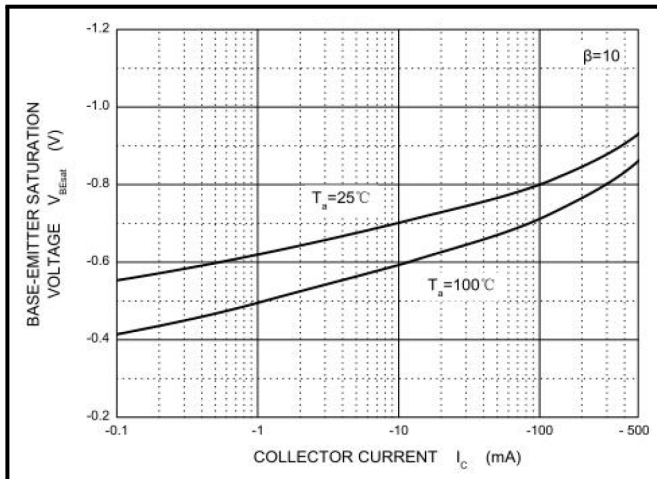


Figure 4 : $V_{CEsat}-I_c$

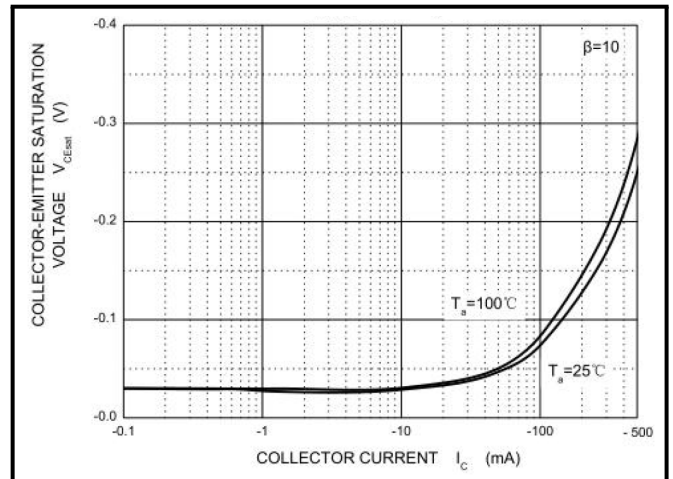

BC807

PNP Plastic-Encapsulate Transistor

Typical Performance Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise noted)

Figure 5 : $I_C - V_{BE}$

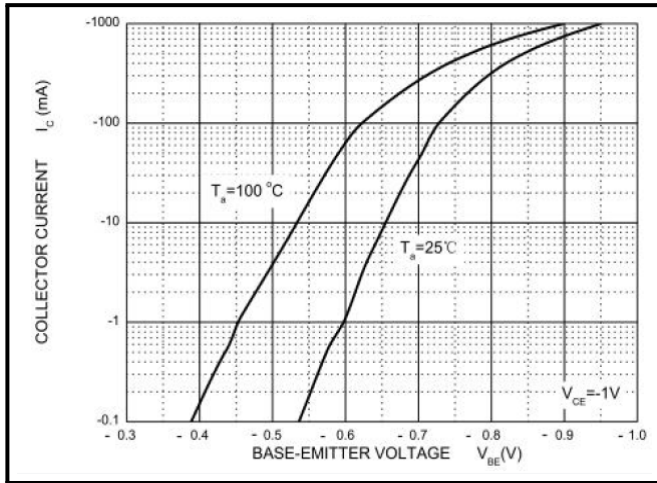


Figure 6 : $C_{ob}/C_{ib} - V_{CB}/V_{EB}$

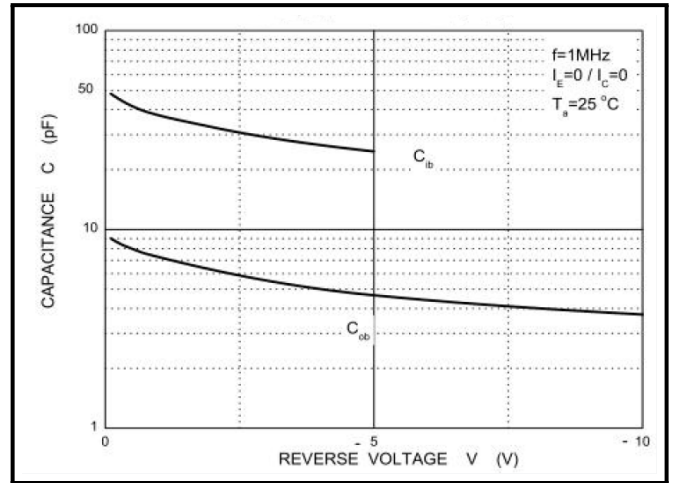


Figure 7 : $f_T - I_C$


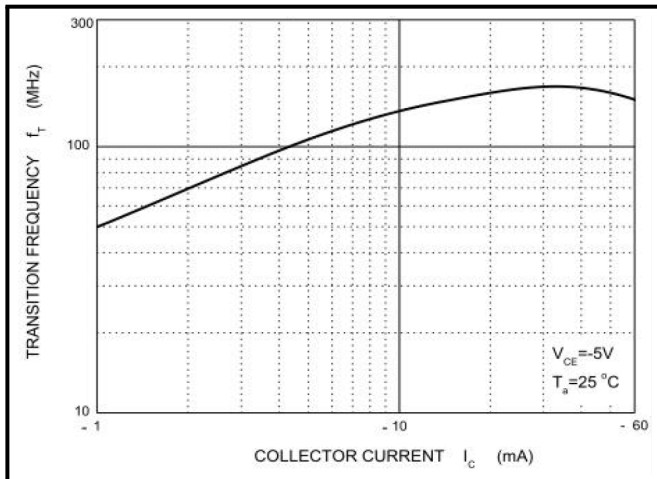



Figure 8 : $P_C - T_A$

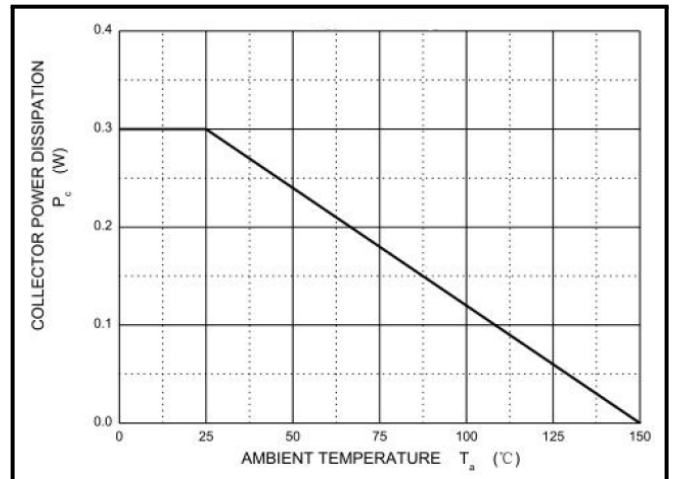

BC807


PNP Plastic-Encapsulate Transistor

Outline Drawing - SOT-23

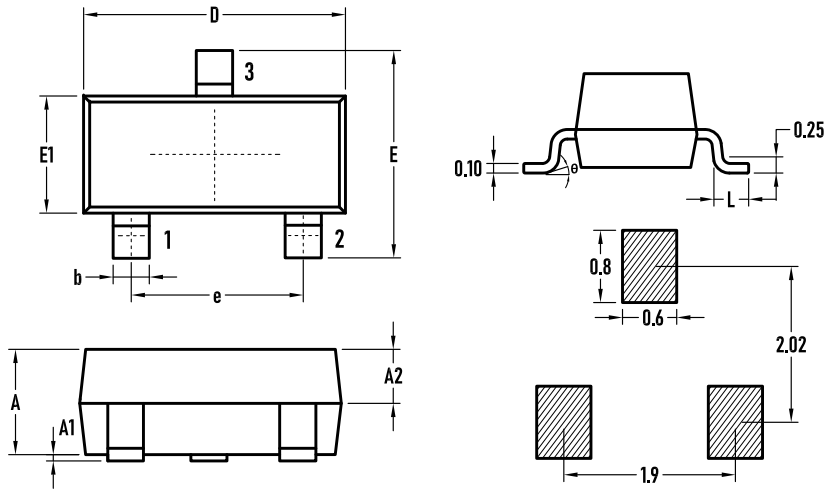


SYMBOL	MILLIMETER		
	MIN.	Typ	MAX
A	0.95	1.00	—
A1	0.02	0.06	0.10
A2	—	0.60	—
D	2.85	2.90	2.95
b	0.37	0.40	0.43
E	2.35	2.40	2.45
E1	1.25	1.30	1.35
e	1.85	1.90	1.95
L	0.35	0.40	0.48
θ	0	—	6°

Packaging Tape - SOT-23

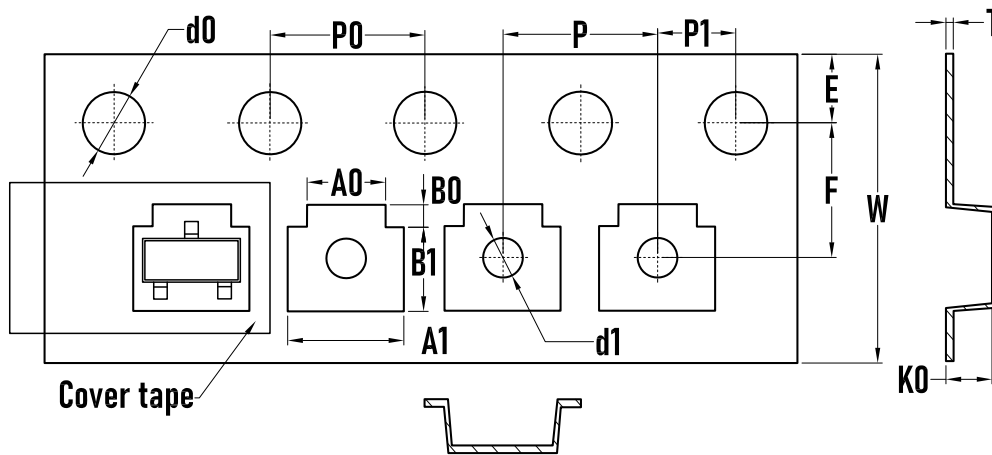

SYMBOL	MILLIMETER
A0	2.10±0.10
A1	3.10±0.10
B0	0.65±0.10
B1	2.75±0.10
d0	1.55±0.10
d1	1.00±0.05
E	1.75±0.10
F	3.50±0.10
K0	1.10±0.10
P	4.00±0.10
P0	4.00±0.10
P1	2.00±0.10
W	8.00±0.30
T	0.20 ±0.05

Packaging Reel

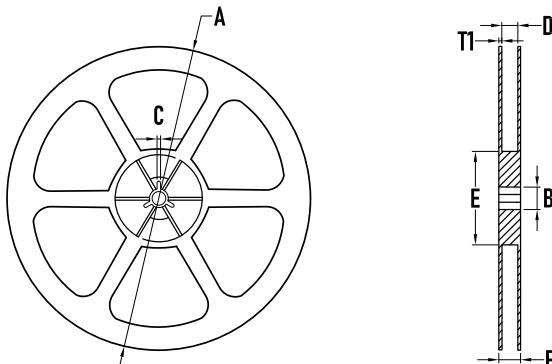

SYMBOL	MILLIMETER
A	177.8±0.2
B	3.1
C	13.50
D	9.6±0.3
E	75±0.2
F	12.3±0.3
T1	1.0±0.2
Quantity	3000PCS

**BORN SEMICONDUCTOR, INC. ALL
RIGHT RESERVED**

Specifications are subject to change without notice.
Please refer to <http://www.born-tw.com> for current information.

Revision: 2022-Jan-1-A



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Bourne manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)