



## Features

- Small Body Outline Dimensions:  
0.039" x 0.024" (1.0 mm x 0.60 mm)
- Protects one I/O or power line
- Low Clamping Voltage
- Ultra Low Capacitance: 0.2pF
- Working Voltage: 5 V
- Low Leakage Current
- Response Time is Typically < 1 ns

**DFN-2L**

## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) ±15kV (air), ±10kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)


## Mechanical Characteristics

- DFN-2L package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS/WEEE Compliant

## Applications

- Laptop Computers
- Cellular Phones
- Digital Cameras
- Personal Digital Assistants (PDAs)

## Schematic & PIN Configuration

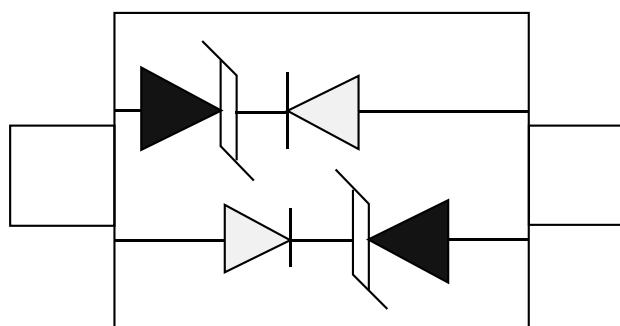
**DFN-2L (Top View)**

**Absolute Maximum Rating**

Rating	Symbol	Value	Units
Electrostatic discharge Voltage (See Note1 ,2)	V <sub>ESD</sub>	10 KV(contact)	Volts
		15KV (air)	
Operating Temperature	T <sub>J</sub>	-55 to + 125	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

**Electrical Parameters (T=25°C)**

Symbol	Parameter
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
I <sub>T</sub>	Test Current
I <sub>F</sub>	Forward Current
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>

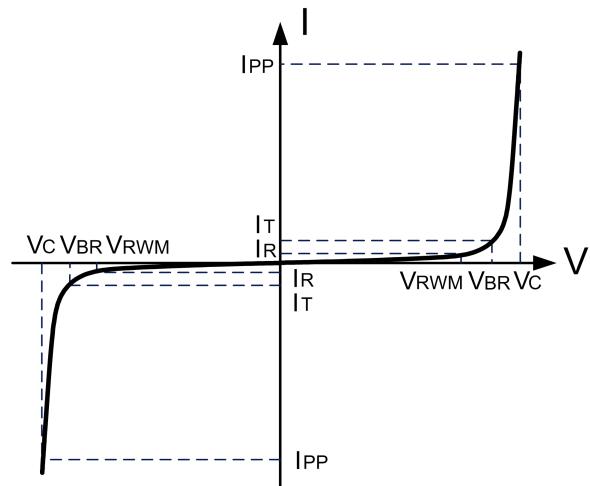**Electrical Characteristics**


<b>BDFN2C051RF2</b>						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V <sub>RWM</sub>				5.0	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> =1mA	6.0			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =5V, T=25°C		0.1	0.5	µA
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =3A, t <sub>p</sub> =8/20µs		10	15	V
Peak Pulse Current	I <sub>PP</sub>	t <sub>p</sub> =8/20µs			3.0	A
Junction Capacitance	C <sub>j</sub>	V <sub>R</sub> = 0V, f= 1MHz	0.17	0.2	0.26	pF

**Note1:** ESD Pulse Waveform according to IEC 61000-4-2. see Table1 and Figure4.


**Note2:** ESD tests Setup see Figure 5.

## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

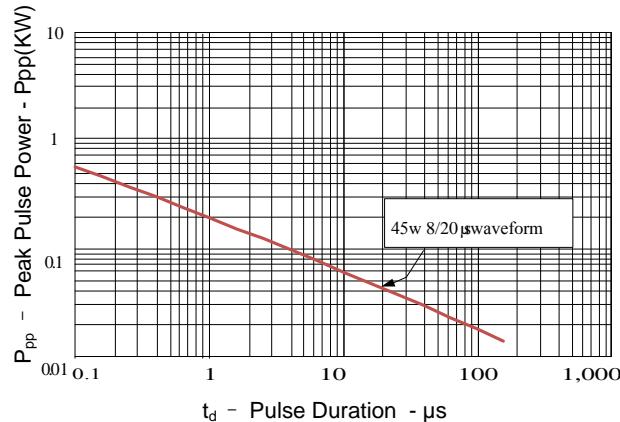


**Figure 2: Power Derating Curve**

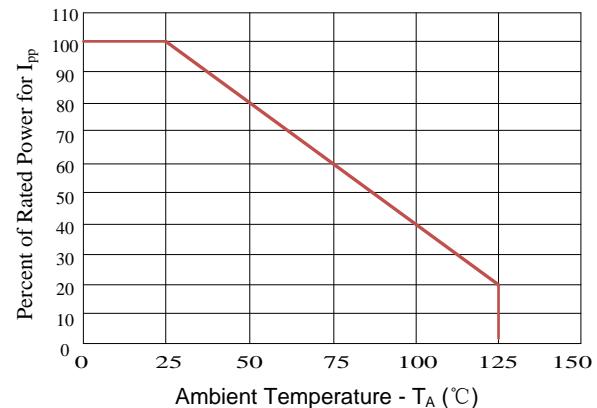

**Figure 3: Pulse Waveform**

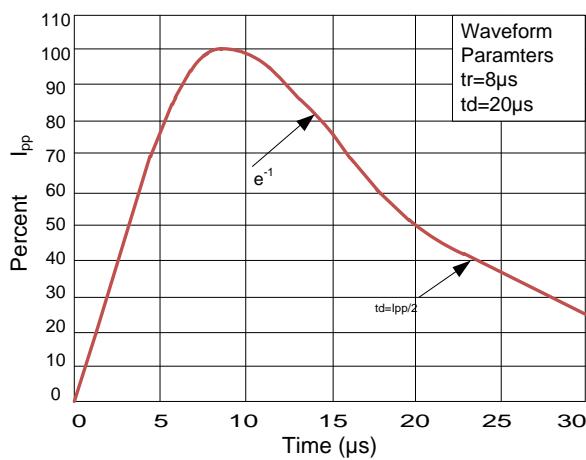

**Figure 4: Clamping Voltage vs. I<sub>pp</sub>**

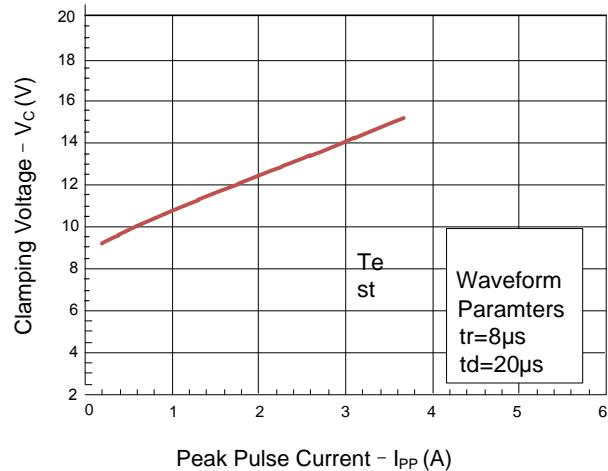




## Outline Drawing – DFN-2L

PACKAGE OUTLINE			
SYMB	MILIMETER		
OL	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
C	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05REF		
h	0.07	0.12	0.17

### Land Pattern



### Marking Codes

Part Number	Marking Code
BDFN2C051RF2	5 C

### Package Information

Qty: 10k/Reel

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Bourne manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)