


»Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

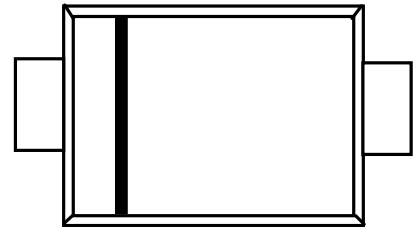


SOD-123FL

»General Description

- Case: molded plastic
- Polarity: Color band denotes cathode
- Package: SOD-123FL Plastic Package

»Marking Information







XX/XXX = Type Code

» Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


MDD Catalog Number	SYMBOLS	DSS32	DSS33	DSS34	DSS35	DSS36	DSS37	DSS38	DSS39	DSS310	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current	$I_{(AV)}$	3.0									Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	80.0									Amps
Maximum instantaneous forward voltage at 3.0A	$V_F$	0.52	0.55	0.70			0.85			Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	0.5									mA
		20.0						10.0			
Operating junction temperature range	$T_J$	-55 to +125						-55 to +150			°C
Storage temperature range	$T_{STG}$	-55 to +150									°C

»Typical Performance Characteristics (T<sub>J</sub> = 25 °C, unless otherwise noted)

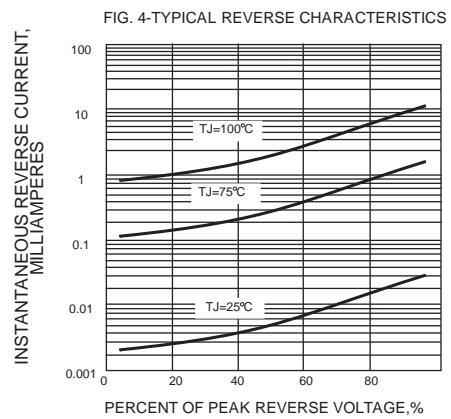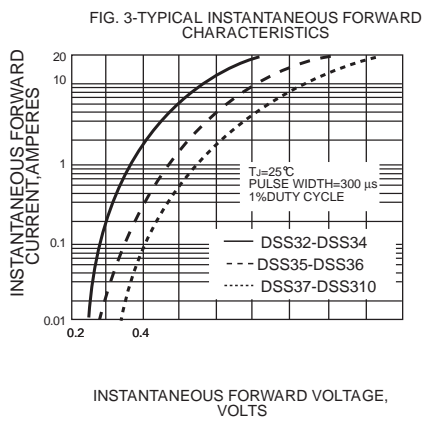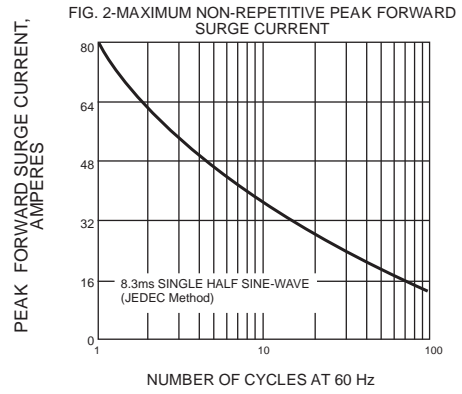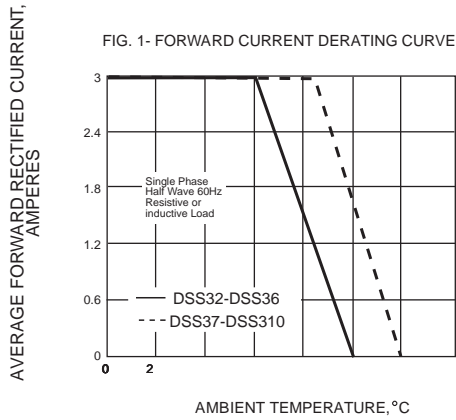

»Package Information

SOD-123FL

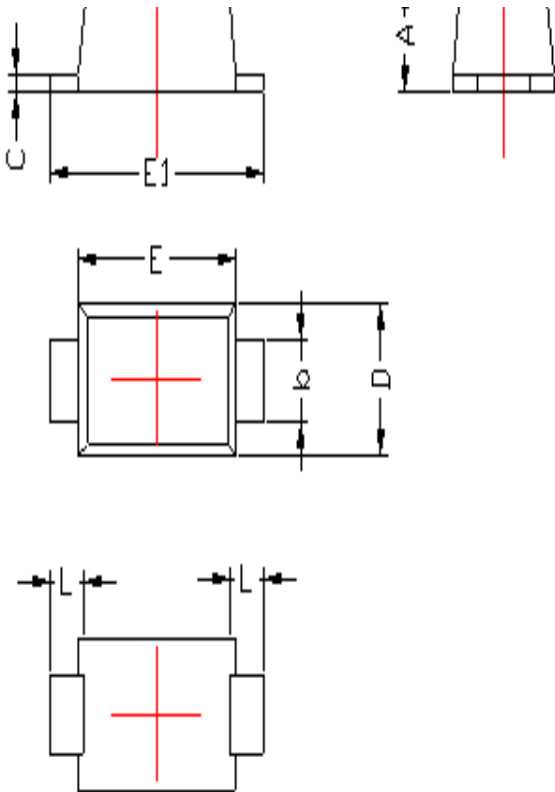

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	1.20	1.40
b	0.80	1.10
c	0.15	0.25
D	1.75	1.95
E	2.70	2.90
E1	3.50	3.90
L	0.35	0.85

»Ordering information

Package	Packing Description	Packing Quantity	Industry Standard
SOD-123FL	Tape/Reel,7" reel	3000	EIA-481-1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Bourne](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)  
[MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#)  
[SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#)  
[ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)  
[MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)  
[PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#) [HSM560Je3/TR13](#)