



# UG6KB05-UG6KB100


## BRIDGE RECTIFIERS

### Features

- Glass passivated die construction
- High surge current capability
- High surge current capability
- designed for surface mount application
- Plastic material-UL flammability 94V-0

### Mechanical Data

- Case: D3K, molded plastic
- Terminal: Plated leads solderable per MIL-STD 202, Method 208
- Polarity: As Marked on case
- Mounting Position: Any
- Marking: Type Number
- Lead Free: For RoHS/Lead Free Version

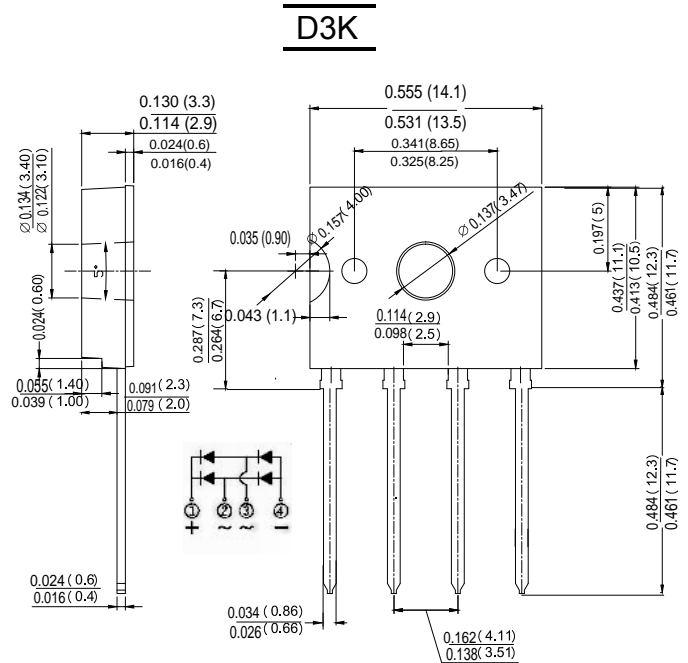

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics @TA=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	UG6KB 05	UG6KB 10	UG6KB 20	UG6KB 40	UG6KB 60	UG6KB 80	UG6KB 100	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average forward output rectified current	I (AV)	6.0							A
Peak forward surge current 8.3ms single sine-wave superimposed on rated load (JEDEC Method)	IFSM	150							A
Maximum instantaneous forward voltage drop per diode @6.0A	VF	1.1							V
Maximum DC reverse current at TA=25°C rated DC blocking voltage per leg TA=125°C	IR	5.0 500							uA
Typical thermal resistance per leg	R $\theta$ JA	55							°C/W
	R $\theta$ JL	15							
Operating junction temperature range	TJ	-55 to +150							°C
storage temperature range	Tstg	-55 to +150							°C

Note: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VD.C.







# UG6KB05-UG6KB100

## BRIDGE RECTIFIERS

### Characteristic Curves ( $T_A=25\text{ }^\circ\text{C}$ unless otherwise noted)

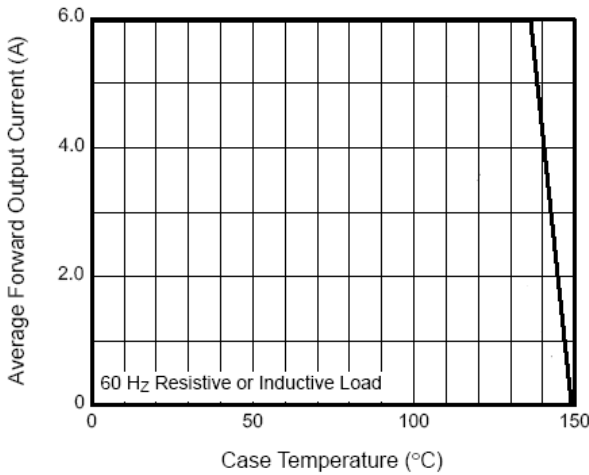

**Fig. 1 – Derating Curve  
Output Rectified Current**

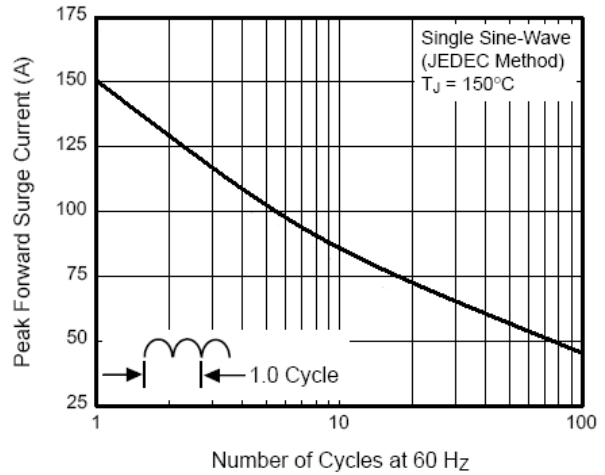

**Fig. 2 – Maximum Non-Repetitive Peak  
Forward Surge Current Per Leg**

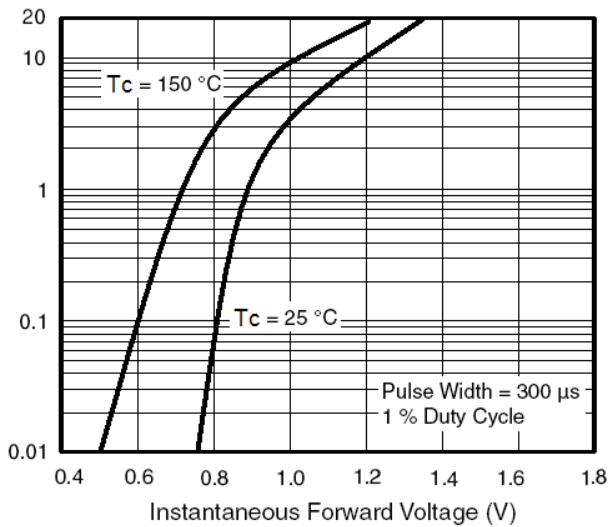


Figure 3. Typical Forward Characteristics Per Diode

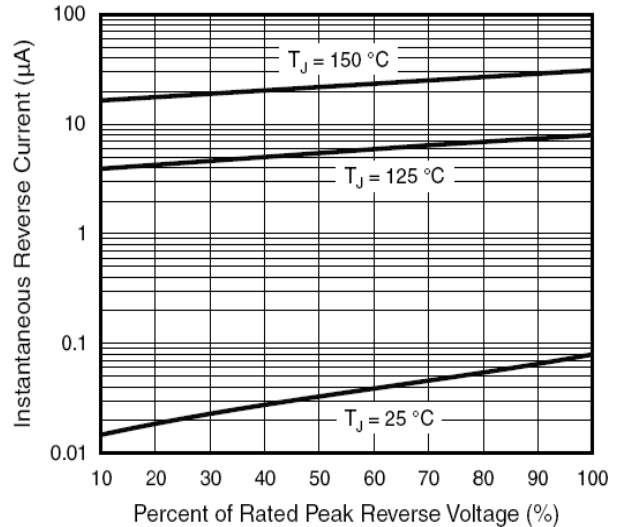


Figure 4. Typical Reverse Leakage Characteristics Per Diode

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [Bourne](#) manufacturer:*

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [DB101-BP](#) [DF01](#)  
[DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [GSIB1520-E3/45](#) [36MB140A](#) [TB102M](#)  
[MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR84DTP204](#) [BU1508-E3/51](#) [KBPC25-02](#)  
[VS-110MT120KPBF](#) [VS-2KBB60](#) [VS-60MT120KPBF](#) [VS-60MT80KPBF](#) [DB105-BP](#) [DF1510S](#) [VS-40MT160PAPBF](#) [VISKBU8K-E4/51](#)  
[36MT100](#) [GBU4G-BP](#) [GBU6B-E3/51](#) [DF15005S-E3/77](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [D3SB60](#) [TB354](#)