

Varnished Chokes

Special Features

- High Q, high self-resonant frequency
- High voltage application on phenolic components
- Low cost
- Varnish coated
- Operating temperature:
-55 to +125 °C

Notes

* Current to cause 35 °C max. temperature rise

4600 Series									
Part Number	L (μH) ±20 %	Q Min.	Test Freq. (MHz)	SRF (MHz) Min.	DCR Ω Max.	I, DC* (mA)	Coil Diam. Max.	Core Matl.	Fig.
4602-RC	1.0	60	7.96	190	0.05	2000	0.27	Phenolic	A
	±10 %								
4604-RC	1.5	58	7.96	149	0.093	1800	0.27	Phenolic	A
4606-RC	2.4	56	7.96	120	0.19	1500	0.27	Phenolic	A
4608-RC	3.9	60	7.96	93	0.45	1000	0.27	Phenolic	A
4609-RC	5.5	57	7.96	80	0.67	850	0.27	Phenolic	A
4610-RC	6.2	57	7.96	76	0.83	700	0.27	Phenolic	A
4611-RC	8.2	57	7.96	65	1.2	600	0.27	Phenolic	A
4612-RC	10	36	2.52	61	1.5	500	0.27	Phenolic	A

“-RC” suffix indicates RoHS compliance.

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

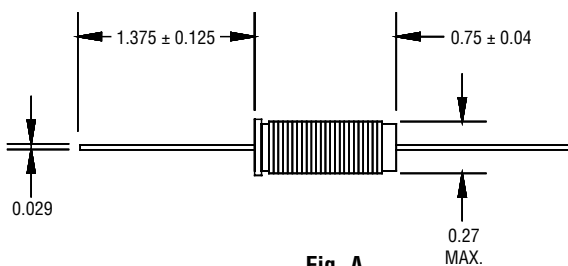


Fig. A

Dimensions: Inches

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Bourns](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)