

High Current Chokes



This series is currently available but not recommended for new designs.

Special Features

- Very high current capacity
- Low DCR
- Ferrite bobbin core
- VW-1 rated shrink tubing to cover winding
- Fixed lead spacing
- Operating temperature -55 to +105 °C


Notes

- * Current to cause 5 % max. inductance drop or 35 °C max. temperature rise

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

5600 Series						
Part Number	L (μ H) @ 1 KHz	DCR Ω	I, DC* (A)	Dim. A Max.	Dim. B Max.	Dim. C $\pm .06$
5601-RC	5	0.007	15	0.83	0.91	0.59
5602-RC	10	0.008	14	0.83	0.91	0.60
5603-RC	25	0.023	8	0.83	0.91	0.57
5604-RC	50	0.034	6.6	0.83	0.91	0.65
5605-RC	100	0.072	4.5	0.83	0.91	0.69
5606-RC	250	0.173	2.9	0.83	0.91	0.65
5607-RC	500	0.378	2	0.83	0.91	0.68
5608-RC	1000	0.801	1.3	0.83	0.91	0.66
5609-RC	2500	2.040	.85	0.83	0.91	0.71
5610-RC	5	0.005	20	1.22	1.11	0.94
5611-RC	10	0.006	17	1.22	1.11	0.95
5612-RC	25	0.009	14	1.22	1.11	0.93
5613-RC	50	0.017	10	1.22	1.11	0.99
5614-RC	100	0.034	7	1.22	1.11	0.85
5615-RC	250	0.083	4.6	1.22	1.11	0.97
5616-RC	500	0.129	3.7	1.22	1.11	1.12
5617-RC	1000	0.279	2.5	1.22	1.11	1.05
5618-RC	2500	0.690	1.6	1.22	1.11	1.05
5619-RC	50	0.012	14	1.50	1.11	1.23
5620-RC	100	0.027	9.8	1.50	1.11	1.12
5621-RC	250	0.059	6.4	1.50	1.11	1.10
5622-RC	500	0.090	5	1.50	1.11	1.14
5623-RC	1000	0.195	3.5	1.50	1.11	1.36
5624-RC	2500	0.499	2.2	1.50	1.11	1.32
5625-RC	5000	1.080	1.5	1.50	1.11	1.27
5626-RC	100	0.018	14	1.50	1.50	1.18
5627-RC	250	0.040	9	1.50	1.50	1.12
5628-RC	500	0.085	6.5	1.50	1.50	1.06
5629-RC	1000	0.183	4.4	1.50	1.50	1.23
5630-RC	2500	0.464	2.8	1.50	1.50	1.21
5631-RC	5000	0.714	2.2	1.50	1.50	1.63
5632-RC	10,000	1.560	1.5	1.62	1.50	1.25

"RC" suffix indicates RoHS compliance.

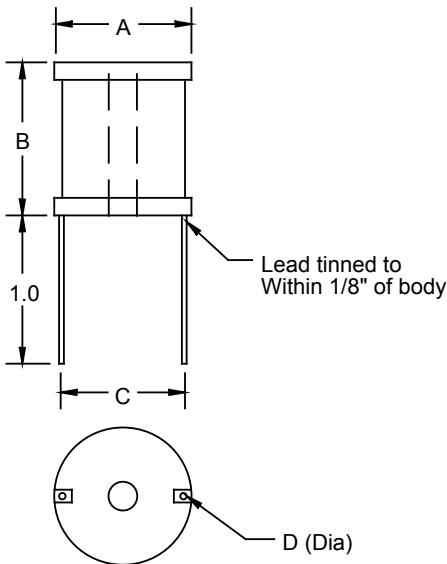

Dimensions: Inches

BOURNS®

Tel. (877) 426-8767 • Fax (951) 781-5006

www.bourns.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Bourns manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)
[1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)