

Varnished Chokes



This series is currently available but not recommended for new designs.

Special Features

- High Q, high self-resonant frequency
- High voltage application on phenolic components
- Single layer wound
- Low cost
- Varnish coated
- Color dot identification
- Operating temperature: phenolic -55 to +125 °C; iron -55 to +105 °C


Notes

* Current to cause 35 °C max. temperature rise

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

74F Series							
Part Number	L (μH) ±20 %	Q Min.	Test Freq. (MHz)	SRF (MHz) Min.	DCR Ω Max.	I, DC* (mA)	Core Material
74F106AP-RC	1.0	45	7.96	190	0.20	1000	Phenolic
74F126AP-RC	1.2	45	7.96	174	0.22	950	Phenolic
74F156AP-RC	1.5	45	7.96	160	0.25	900	Phenolic
74F186AP-RC	1.8	45	7.96	144	0.28	850	Phenolic
74F226AP-RC	2.2	45	7.96	132	0.30	800	Phenolic
±10 %							
74F276AP-RC	2.7	45	7.96	119	0.50	700	Phenolic
74F336AP-RC	3.3	45	7.96	108	0.70	600	Phenolic
74F396AP-RC	3.9	45	7.96	101	0.80	500	Phenolic
74F476AP-RC	4.7	50	7.96	91	1.0	400	Phenolic
74F566AP-RC	5.6	50	7.96	83	1.8	350	Phenolic
74F686AP-RC	6.8	50	7.96	75	1.85	300	Phenolic
74F826AP-RC	8.2	50	7.96	68	1.9	275	Phenolic
74F105AP-RC	10	50	7.96	62	3.0	250	Phenolic
74F125AP-RC	12	30	2.52	57	3.6	200	Phenolic
74F155AP-RC	15	30	2.52	51	6.0	150	Phenolic
74F185AP-RC	18	30	2.52	46	7.5	100	Phenolic
74F225AI-RC	22	85	2.52	28	2.0	500	Iron
74F275AI-RC	27	80	2.52	26	1.85	450	Iron
74F335AI-RC	33	80	2.52	24	2.0	450	Iron
74F395AI-RC	39	90	2.52	21	2.6	400	Iron
74F475AI-RC	47	90	2.52	19	3.5	350	Iron
74F565AI-RC	56	90	2.52	18	3.75	300	Iron
74F685AI-RC	68	90	2.52	17	4.0	250	Iron
74F825AI-RC	82	100	2.52	15	5.1	200	Iron
74F104AI-RC	100	100	2.52	14	6.0	100	Iron

“-RC” suffix indicates RoHS compliance.

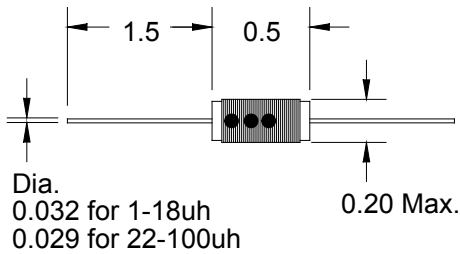

Dimensions: Inches

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Bourns](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)