

Features

- RoHS compliant*
- SMA package
- Surface mount
- Very low forward voltage drop



This series is currently available but not recommended for new designs. The **Model CD214A-B1xR Series** is the recommended replacement.

CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Schottky Rectifier Diodes for rectification applications, in compact chip package DO-214AC (SMA) size format, which offer PCB real estate savings and are considerably smaller than competitive parts. The Schottky Rectifier Diodes offer a forward current of 1 A with a choice of repetitive peak reverse voltage of 20 V up to 100 V.

Bourns® Chip Diodes conform to JEDEC standards, are easy to handle on standard pick and place equipment and their flat configuration minimizes roll away.

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD214A-											Unit
		B120	B120L	B130	B130L	B140	B150	B160	B170	B180	B190	B1100	
Forward Voltage (Max.) (I _F = 1 A)	V _F	0.5	0.41	0.5	0.41	0.5	0.7	0.7	0.79	0.79	0.79	0.79	V
Typical Junction Capacitance**	C _T	110	100	110	100	110	110	110	30	30	30	30	pF
Reverse Current (Max.) at Rated V _R)	I _R	500	1000	500	1000	500	500	500	500	500	500	500	μA

** Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC.

Absolute Ratings (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD214A-											Unit
		B120	B120L	B130	B130L	B140	B150	B160	B170	B180	B190	B1100	
Repetitive Peak Reverse Voltage	V _{RRM}	20	20	30	30	40	50	60	70	80	90	100	V
Reverse Voltage	V _R	20	20	30	30	40	50	60	70	80	90	100	V
Maximum RMS Voltage	V _{RMS}	14	14	21	21	28	35	42	49	56	63	70	V
Avg. Forward Current	I _O	1											A
Forward Current, Surge Peak (60 Hz, 1 cycle)	I _{surge}	30	25	30	25	30	30	30	30	30	30	30	A
Typical Thermal Resistance***	R _{θJL}	20	35	20	35	20	20	20	25	25	25	25	°C/W
Storage Temperature	T _{STG}	-55 to +150											°C
Junction Temperature	T _J	-55 to +125											°C

*** Thermal resistance junction to lead.

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 520 390 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

How to Order

	CD 214A - B 1 30 L LF
Common Code	_____
Chip Diode	_____
Package	_____
214A = SMA/DO-214AC	_____
Model	_____
B = Schottky Barrier Series	_____
Average Forward Current (I _O) Code	_____
1 = 1 A (Code x 1000 mA = Average Forward Current)	_____
Reverse Voltage (V _R) Code	_____
30 = 30 V	_____
40 = 40 V	_____
100 = 100 V	_____
Forward Voltage Suffix (Applies to -B120L & -B130L only)	_____
L = Low Forward Voltage V _F (-B120L & -B130L only)	_____
No Space in P/N = Not Low Forward Voltage	_____
Terminations	_____
LF = 100 % Sn (RoHS Compliant*)	_____

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode

BOURNS®


Product Dimensions

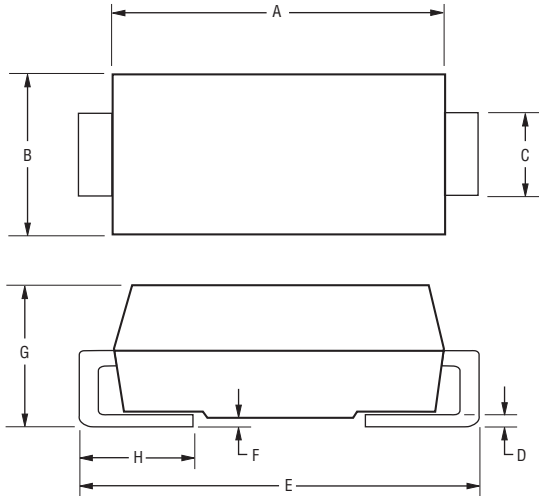

Dimension	SMA (DO-214AC)
A	$\frac{4.06 - 4.57}{(0.160 - 0.180)}$
B	$\frac{2.29 - 2.92}{(0.090 - 0.115)}$
C	$\frac{1.27 - 1.63}{(0.050 - 0.064)}$
D	$\frac{0.15 - 0.31}{(0.006 - 0.110)}$
E	$\frac{4.83 - 5.59}{(0.190 - 0.220)}$
F	$\frac{0.05 - 0.20}{(0.002 - 0.008)}$
G	$\frac{2.01 - 2.62}{(0.080 - 0.103)}$
H	$\frac{0.76 - 1.52}{(0.030 - 0.060)}$

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Recommended Pad Layout

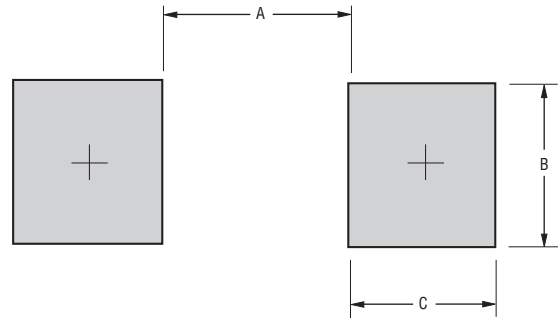

Dimension	SMA (DO-214AC)
A	$\frac{2.90}{(0.114)}$
B	$\frac{2.40}{(0.094)}$
C	$\frac{2.30}{(0.091)}$

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Physical Specifications

Case Molded plastic
 Polarity..... Indicated by cathode band
 Weight 0.002 ounces / 0.064 grams

Typical Part Marking


CD214A-B120 **B**120
 CD214A-B120L **B**120L
 CD214A-B130 **B**130
 CD214A-B130L **B**130L
 CD214A-B140 **B**140
 CD214A-B150 **B**150
 CD214A-B160 **B**160
 CD214A-B170 **B**170
 CD214A-B180 **B**180
 CD214A-B190 **B**190
 CD214A-B1100..... **B**1100

CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B120, CD214A-B130, CD214A-B140, CD214A-B150 & CD214A-B160


Forward Characteristics

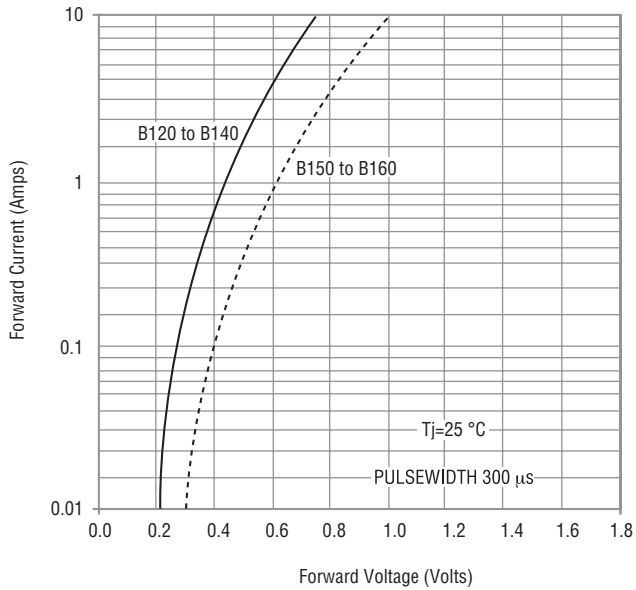


Reverse Characteristics

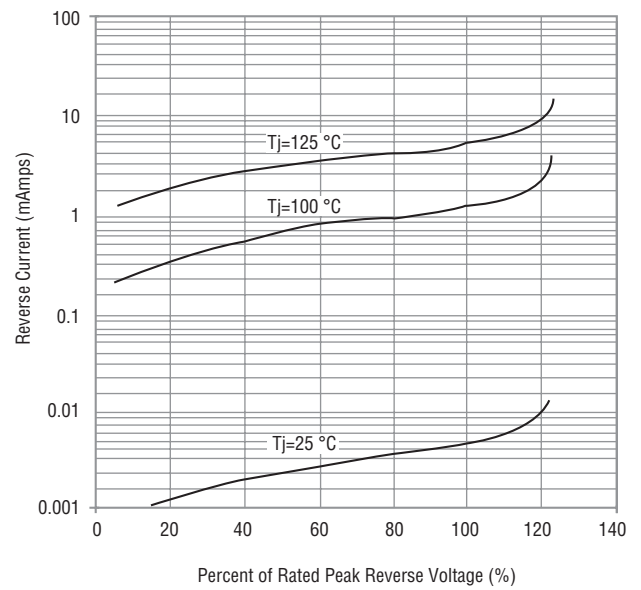

Derating Curve

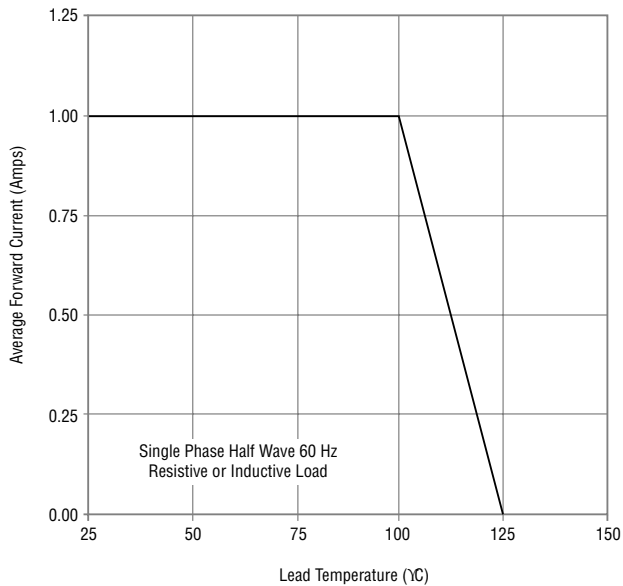

Capacitance Between Terminals

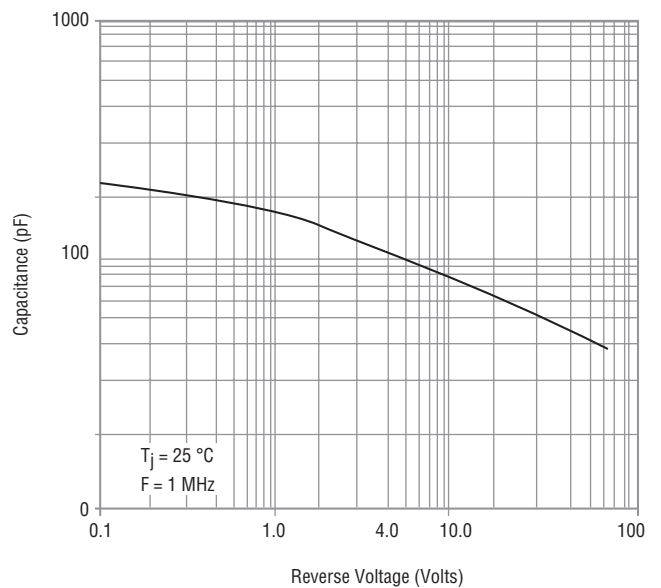


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode **BOURNS®**

Rating and Characteristic Curves: CD214A-B120L, CD214A-B130L


Forward Characteristics

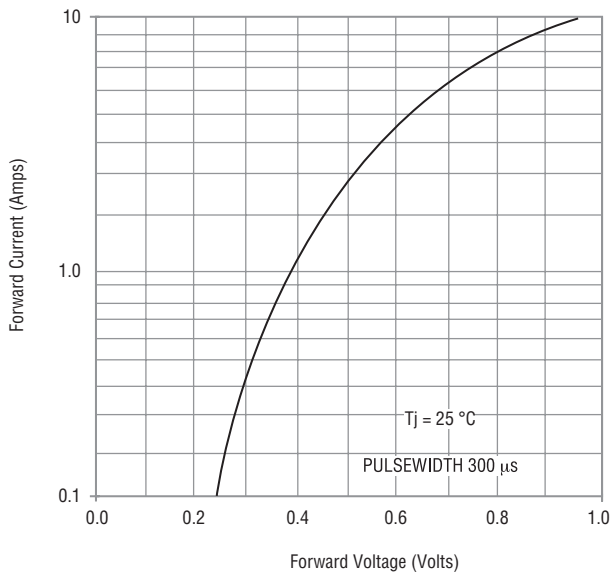


Reverse Characteristics

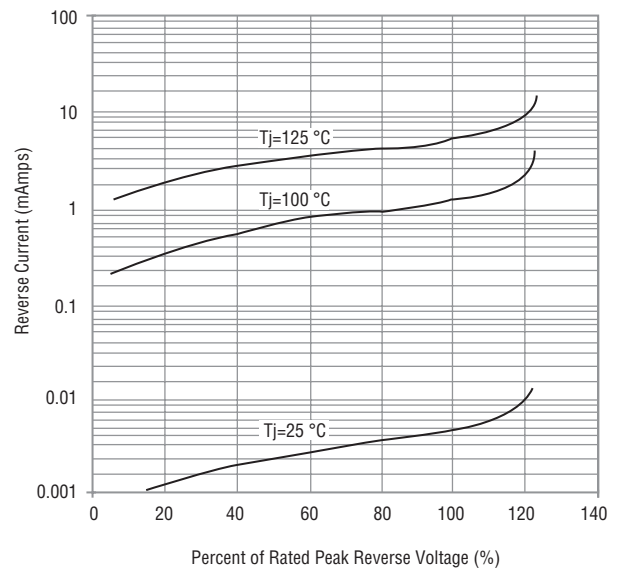

Derating Curve

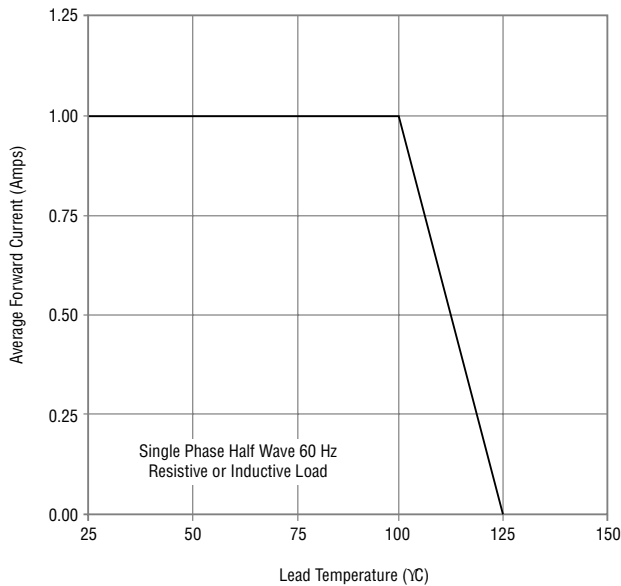

Capacitance Between Terminals

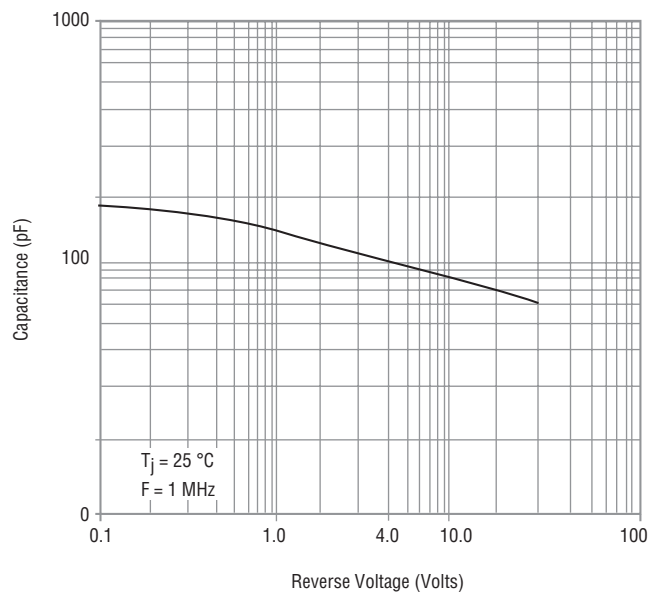


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode **BOURNS®**

Rating and Characteristic Curves: CD214A-B170, CD214A-B180, CD214A-B190 & CD214A-B1100


Forward Characteristics

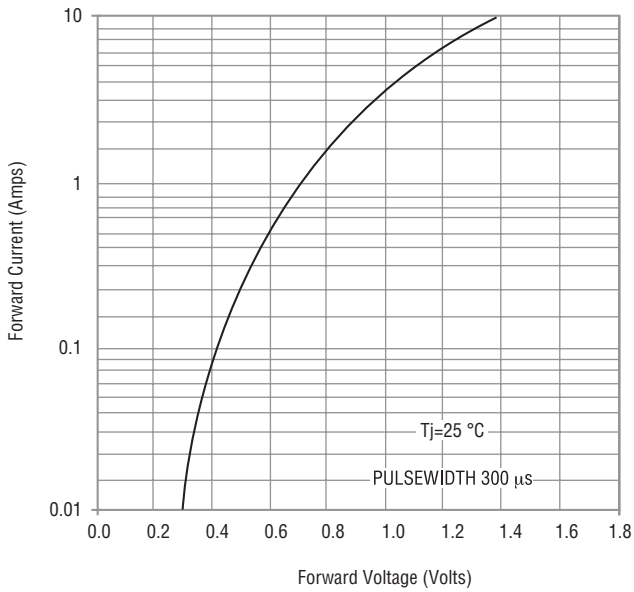


Reverse Characteristics

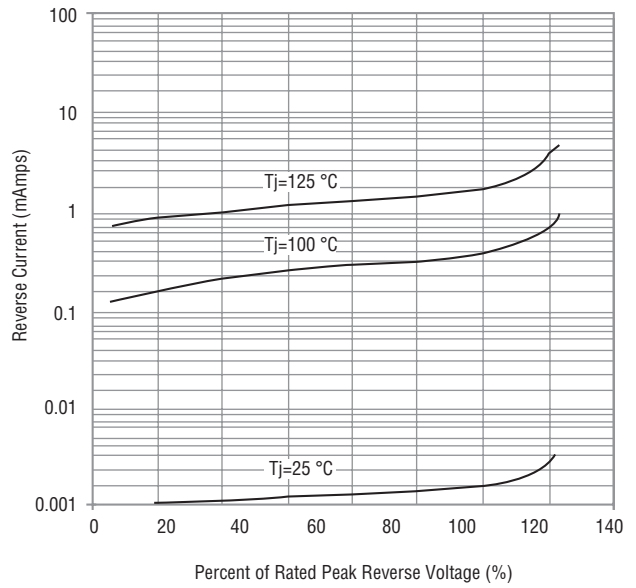

Derating Curve

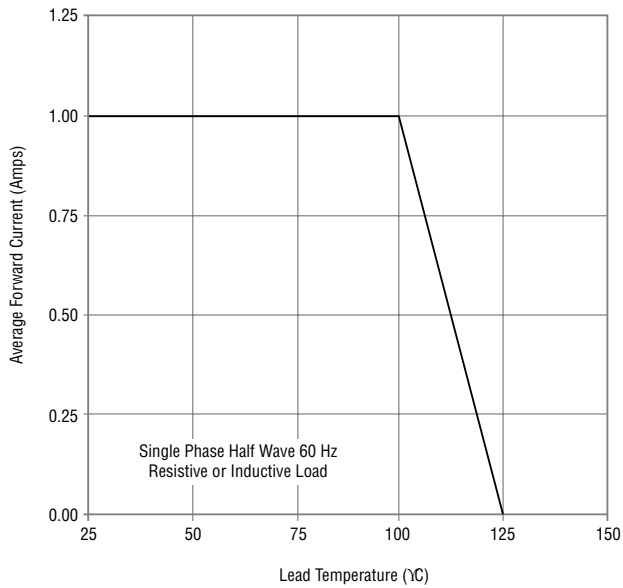

Capacitance Between Terminals

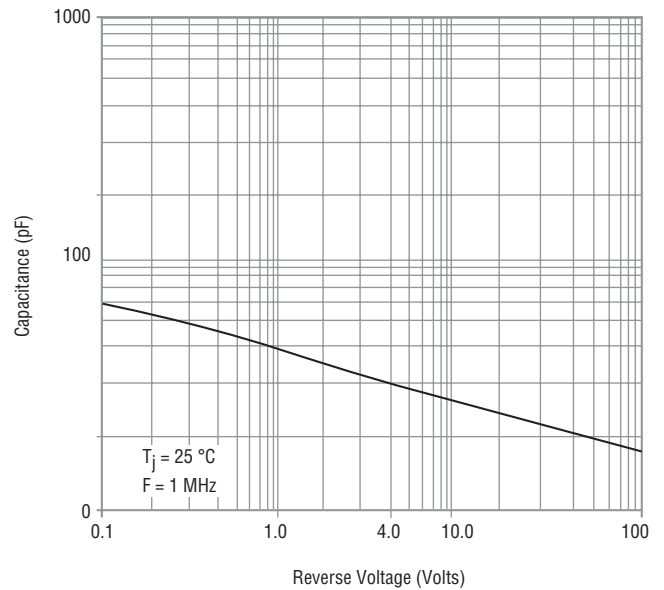


Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

CD214A-B120 ~ B1100 Schottky Barrier Rectifier Chip Diode

BOURNS®

Packaging Information

The product is dispensed in tape and reel format (see diagram below).

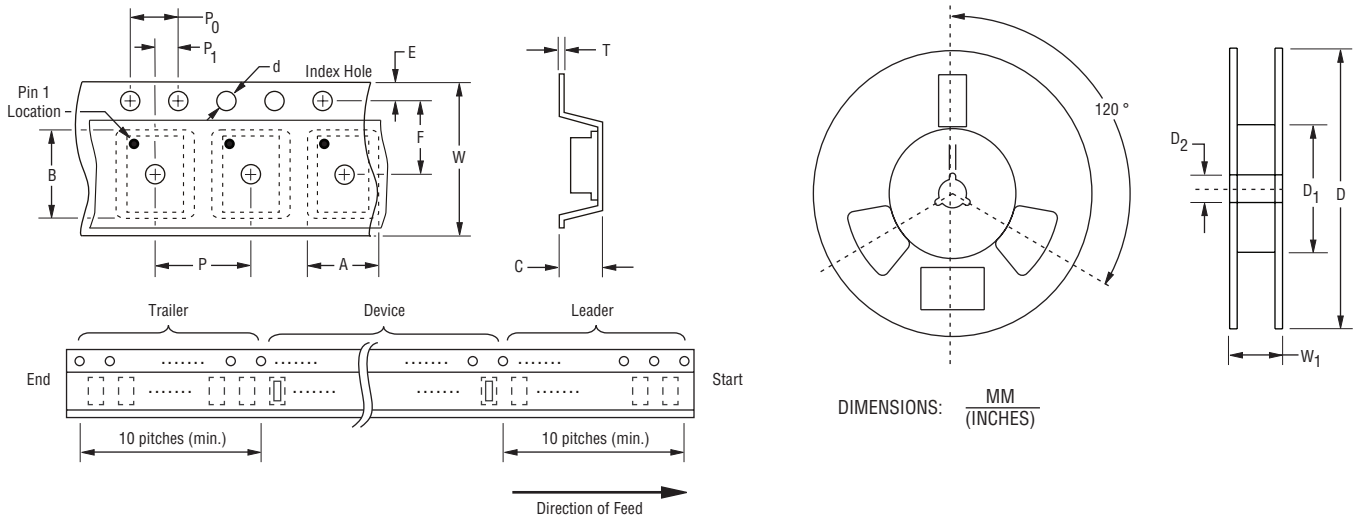

Item	Symbol	SMA (DO-214AC)
Carrier Width	A	$\frac{2.90 \pm 0.10}{(0.114 \pm 0.004)}$
Carrier Length	B	$\frac{5.59 \pm 0.10}{(0.220 \pm 0.004)}$
Carrier Depth	C	$\frac{2.36 \pm 0.10}{(0.093 \pm 0.004)}$
Sprocket Hole	d	$\frac{1.55 \pm 0.05}{(0.061 \pm 0.002)}$
Reel Outside Diameter	D	$\frac{3.30}{(12.992)}$
Reel Inner Diameter	D ₁	$\frac{50.0}{(1.969)}$ MIN.
Feed Hole Diameter	D ₂	$\frac{13.0 \pm 0.20}{(0.512 \pm 0.008)}$
Sprocket Hole Position	E	$\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$
Punch Hole Position	F	$\frac{5.50 \pm 0.05}{(0.217 \pm 0.002)}$
Punch Hole Pitch	P	$\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$
Sprocket Hole Pitch	P ₀	$\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$
Embossment Center	P ₁	$\frac{2.00 \pm 0.05}{(0.079 \pm 0.002)}$
Overall Tape Thickness	T	$\frac{0.30 \pm 0.10}{(0.012 \pm 0.004)}$
Tape Width	W	$\frac{12.00 \pm 0.20}{(0.472 \pm 0.008)}$
Reel Width	W ₁	$\frac{18.4}{(0.724)}$ MAX.
Quantity per Reel	--	5,000

Devices are packed in accordance with EIA standard RS-481-A and specifications shown here.

REV. 01/18

Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Bourns](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [D1FH3-5063](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [RB551V-30](#) [BAS16E6433HTMA1](#) [BAT](#)
[54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-](#)
[TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [SB007-03C-TB-E](#) [SK32A-TP](#)
[SK33B-TP](#) [SK35A-TP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [SS15E-TP](#) [VS-6CWQ10FNHM3](#) [ACDBA1100LR-HF](#)
[ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA340-HF](#)
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [SK310B-TP](#) [MA4E2502L-1246](#) [MA4E2502H-1246](#) [NRVBM120ET1G](#) [NSR01L30MXT5G](#) [NTE573](#)
[NTE6081](#)