

Features

- Carbon element
- Metal housing
- 45-100 mm travel
- Single and dual gang
- Dust cover option
- RoHS compliant*



BOURNS

PTB Series - Low Profile Slide Potentiometer

Electrical Characteristics

Taper.....Linear, audio Standard Resistance Range5K ohms to 200K ohms Standard Resistance Tolerance.....±20 % Residual Resistance

.....500 ohms or 1 % max. Insulation Resistance

...... Min. 100 megohms at 250 V DC

Environmental Characteristics

Operating Temperature

.....-10 °C to +60 °C Power Rating, Linear 45 mm 0.125 W (0.06 W Dual Gang) 60 mm 0.25 W (0.125 W) 100 mm 0.5 W (0.5 W) Power Rating, Audio 45 mm ..0.025 W (0.015 W Dual Gang) 60 mm 0.25 W (0.125 W) 100 mm 0.25 W (0.25 W) Maximum Operating Voltage - Linear 45 mm 350 VDC 60-100 mm 500 VDC Maximum Operating Voltage - Audio 45 mm 250 VDC


Withstand Voltage, Audio 1 Min. at 500 V AC Tracking Error....... 3 dB at 50 % of travel Moisture Sensitivity Level1 ESD Classification (HBM)N/A

60-100 mm Travel 350 VDC

Mechanical Characteristics


Operating Force10 to 100 gf Stop Strength 5 kgf min. Sliding Life......15,000 cycles Soldering Condition 300 °C max. within 3 seconds Travel45, 60, 100 mm


Derating Curve



Product Dimensions

PTB45 and PTB60

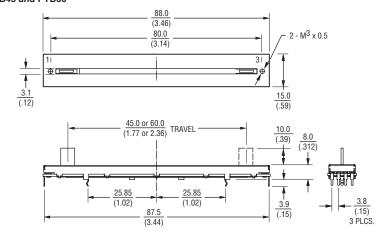


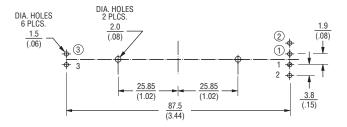

Numbers (1), (2) and (3) for Dual Gang Versions

Lever Styles

AP Metal Lever



BP Metal Lever



DIMENSIONS:

MM (INCHES)



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Applications


- Audio/TV sets
- Amplifiers/mixers/drum machines/synthesizers
- PCs/monitors
- Appliances


PTB Series - Low Profile Slide Potentiometer

BOURNS®

Product Dimensions

PTB100

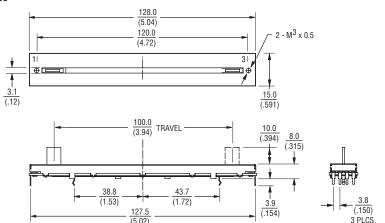


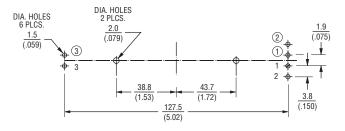

Numbers 1, 2 and 3 for Dual Gang Versions

DIMENSIONS: (INCHES)

How To Order PTB 01 4 3 - 2 0 10 BP A 102



No Detent Standard Lever Length • 10 = 10 mm

Lever Style

BP = Metal Lever (Refer to Drawing)
AP = Metal Lever (Refer to Drawing)

Resistance Taper • A = Audio Taper

• B = Linear Taper

Resistance Code (See Table)

Other styles available.

Standard Resistance Table

Resistance (Ohms)	Resistance Code
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204

Schematics



Legal Disclaimer Notice



This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: http://www.bourns.com/legal/disclaimers-terms-and-policies

PDF: http://www.bourns.com/docs/Legal/disclaimer.pdf

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Potentiometers category:

Click to view products by Bourns manufacturer:

Other Similar products are found below:

M22 SS-4928 RSA0K11A901L RA6020F-10-20D1-B50K RA4520F-10-20D1-B50K X22205CAAF RSA0N11B9A03 448XC2103BDN K22208EAAG PS15-10PC1BR10K 3048L-2-503 MFP 211-N CDE23N-60-B10K CDE23N-60-B1K CDE23N-60-B50K 1825160-1 1825161-2 1825257-1 1825259-2 1825261-2 X22205AAAL PS100-2B1AR10K 1825255-5 PTA6044-2015CPB103 PTA6044-2015CPB104 PTA6044-2015CPA103 PTA6044-2015CPA104 PS100-1B1BR10K PTA3044-2015CPB504 RS15H113CA05 PS20-10PC1BR10K RS08U11AZ001 RA4520F-10-20D1-B1K PTL30-15R0-104B2 PTE60-202B-102B2 PTA6044-2015DPB103 RA6020F-10-20D1-B100K RA6020F-10-15F2-B2K RA4543F-20-15D1-B10K-01 RA3043F-20-10EB1-A100K RA6043F-20-10EB1-A5K RA6020F-10-20D1-B250K RA6020F-10-15F2-B5K RA6020F-10-15F2-B1K RA00B1MF-10-08T1-JISB10K-016 RA60K1F-10-13D1-B100K-011 RA3043F-20-10EB1-A50K RA4520F-10-20D1-B5K SX254 CDE23N-60-B5K